
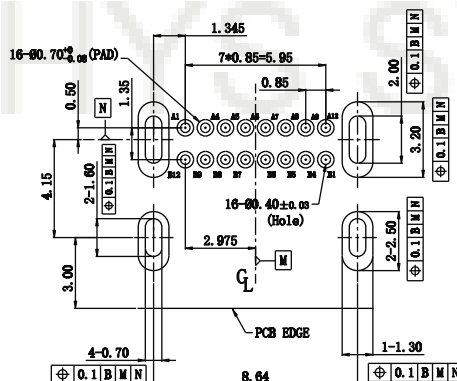
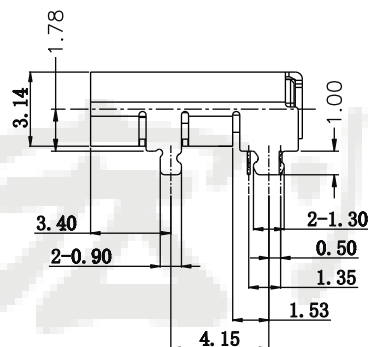

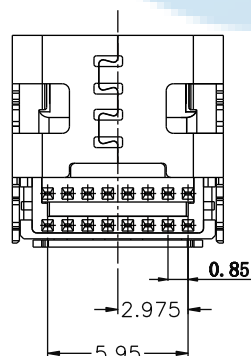



ROHS
Compatible



RECOMMENDED P.C.B LAYOUT

GENERAL TOLERANCE: ± 0.05
PCB TOP SURFACE

备注:

1.材质:

1.1胶芯: LCP+30%G.F

1.2端子: C1814, T=0.12mm; 镀半金锡

1.3外壳: 不锈钢, T=0.30mm; 表面镀镍

1.4卡片: 不锈钢, T=0.15mm;

2.主要特性:

2.1额定电流: 3A FOR VBUS;

1.25A FOR GND;

0.25A FOR OTHER.

2.2接触阻抗: 40m Ω MAX

2.3绝缘阻抗: 100M Ω MIN

2.4耐压测试: 100V AC

2.5沾锡性: 温度 $245\pm 5^{\circ}\text{C}$, 时间 $5\pm 0.5\text{s}$

2.6整体插入力: 5~20N

整体拔出力: 8~20N

耐久后拔出力: 6~20N

2.7使用寿命: 10000次

2.8工作温度: $-25^{\circ}\text{C}\sim +80^{\circ}\text{C}$

U5 103- 16P x x 8.97L
名称 流水号 PIN位 N;母座 T;带弹 L;长度

PIN ASSIGNMENT:

Pin No.	Signal Name	Pin No.	Signal Name
A1	CND	B12	CND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	CND	B1	CND

DESIGN	Li Jinwei	SCALE	1:1
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ± 0.30	X. $^{\circ}\pm 2^{\circ}$
.XX ± 0.20	.X. $^{\circ}\pm 1^{\circ}$
.XXX ± 0.10	.XX. $^{\circ}\pm 0.5^{\circ}$

DRAWG NO.	U5103-16PNT8.97L
TITLE:	16P 板上四脚插板DIP 带弹 8.97L

 东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>