

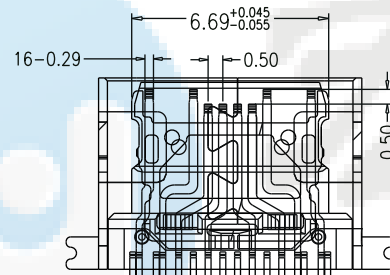
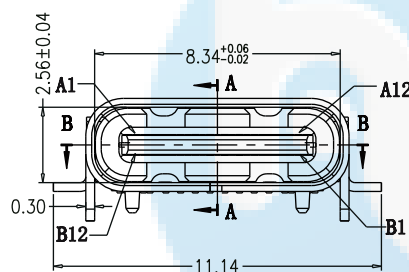

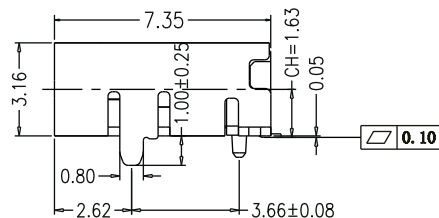




ROHS
Compatible

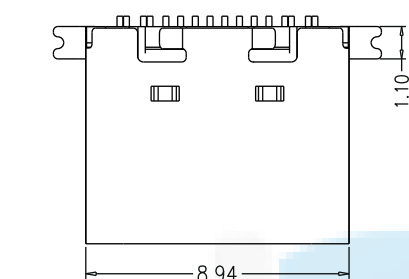

SECTION:B-B

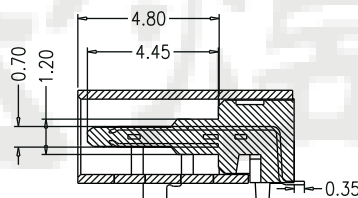

SECTION:A-A

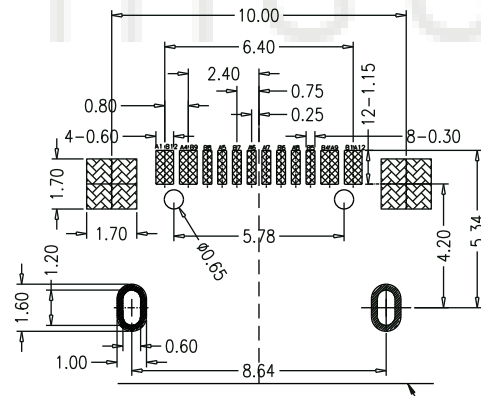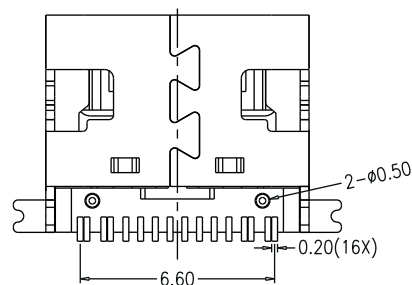

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1.HOUSING:PA9T,UL94 V-0.
 - 2.CONTACTS:COPPER C7025
 - 3.MID PLATE: STAINLESS STEEL SUS304
 - 4.FRONT SHELL: STAINLESS STEEL SUS304
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au1~30u"min PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE G/F
 - 2-2.FRONT SHELL:
Ni 50u" MIN. UNDER PLATED OVER ALL.
 - 2-3.MID PLATE:
CLEAR ONLY
- 3.MECHANICAL PERFORMANCE,
 - 3-1.INSERTION FORCE: 5~20N.
 - 3-2.REMOVAL FORCE: 8~20N,AFTER TEST: 6~20N
 - 3-3.DURABILITY: 10000 CYCLES.
- 4.ELECTRICAL PERFORMANCE,
 - 4-1. CURRENT RATING:5.0A
VOLTAGE RATING:20.0V
 - 4-2. INITIAL LLCR 40mΩ MAX,AFTER TEST 50mΩ MAX
 - 4-3.INSULATION RESISTANCE: 100MΩ MIN
 - 4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
 - 5-1.OPERATING TEMPERATURE: -30°C~+85°C.
 - 5-2.SALTY SPRAY: 48HOURS
- 6.IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.

U5 095- 16P x 7.35L
↓ ↓ ↓ ↓ ↓
名称 流水号 PIN位 N;母座 L;长度

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND





DESIGN	Li Jinwei	SCALE	1:1
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	U5095-16PN7.35L
TITLE:	16P板上 前插后贴带柱SMT 7.35L

 **东莞市宏煜盛实业有限公司**
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>



ROHS
Compatible

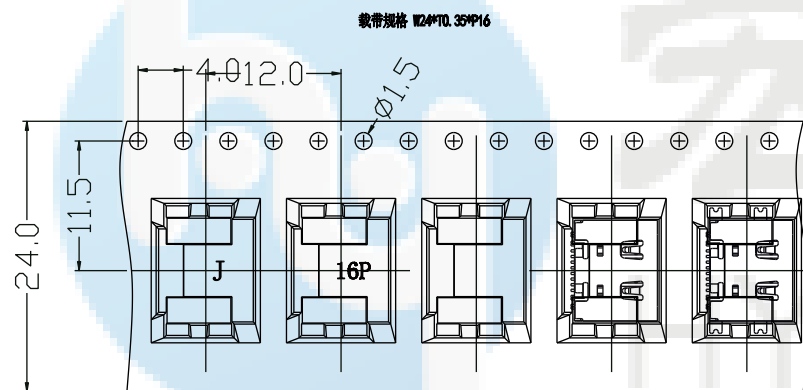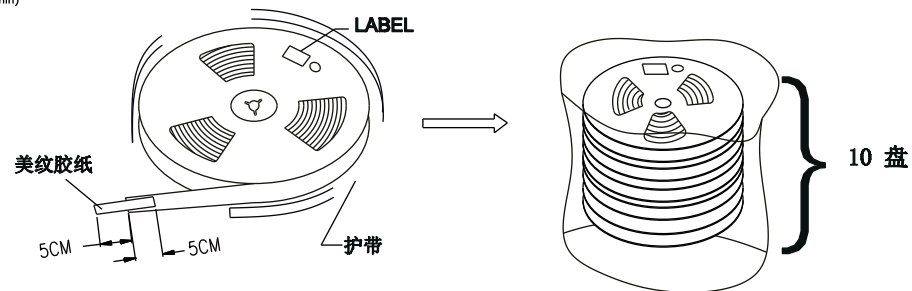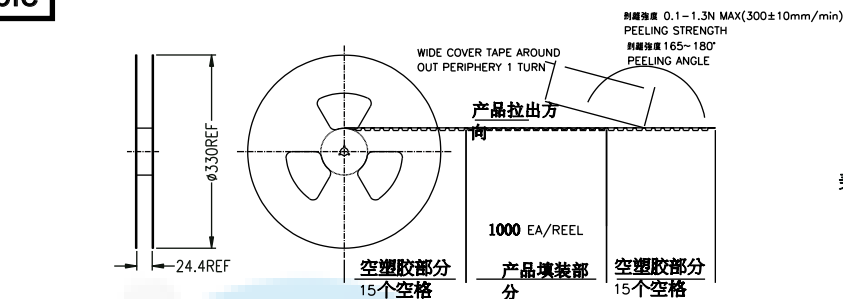

说明:

- 1, 将检查合格的产品, 放入承载带中, 一盘包装1000PCS;
- 2, 将10盘承载带放入纸箱中;
- 3, 将纸箱封装好, 贴上标签.

每箱数量	净重 (Kg)	毛重 (Kg)
10000PCS	XXX	XXX

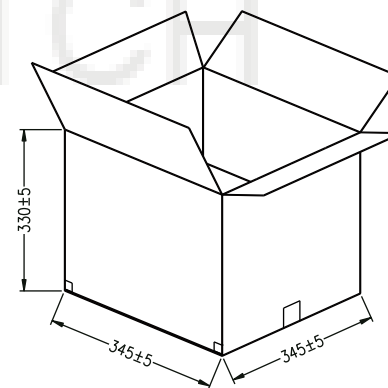

DESIGN	Li Jinwei	SCALL	L
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ± 0.30	X. $^{\circ} \pm 2^{\circ}$
.XX ± 0.20	.X. $^{\circ} \pm 1^{\circ}$
.XXX ± 0.10	.XX. $^{\circ} \pm 0.5^{\circ}$

DRAWG NO.

U5095-16PN7.35L

TITLE:

16P板上 前插后贴带柱SMT 7.35L



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>