
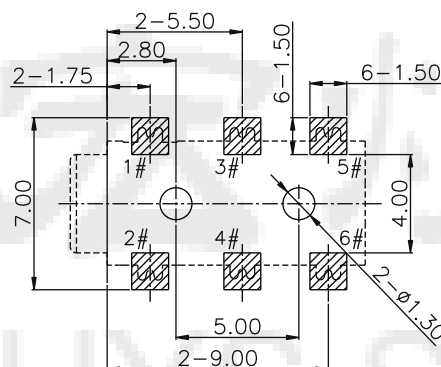


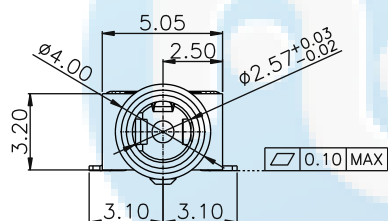


ROHS
Compatible

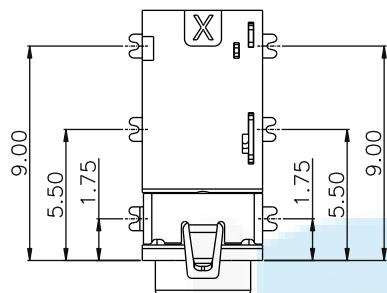

PCB LAYOUT(TOP VIEW)
TOLERANCE:±0.05

NOTES:

1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
 - 3.1. VOLTAGE RATING: 12 VDC RMS;
 - 3.2. CURRENT RATING: 1 AMP;
 - 3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial), 100mΩ Max.(After Life test);
 - 3.4. INSULATION RESISTANCE: 100 MΩ Min., 500VDC.(Initial), 50 MΩ Min., 500VDC.(After Humidity test);
 - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
 - 4.1. MATING FORCE: 3.0Kgf(29.4N) MAX.;
 - 4.2. UNMATING FORCE: 0.3Kgf(2.94N) MIN.;
 - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
 - 5.1. OPERATION: -25°C~+85°C.

PJ xA 001- 06 x
↓ ↓ ↓ ↓ ↓
名称 规格 流水号 PIN位 S:贴片
2.5 6;脚








TABLE 1:

ITEM	NAME	Q'TY	MATERIAL	DESCRIPTION
⑦	HOUSING	1	BLACK	
⑥	TERMINAL 6#	1	PHOSPHOR BRONZE	NICKEL UNDERPLATING OVERALL, GOLD FLASH ON THE SOLDER & CONTACT AREA T=0.20mm
⑤	TERMINAL 5#	1	PHOSPHOR BRONZE	NICKEL UNDERPLATING OVERALL, GOLD FLASH ON THE SOLDER & CONTACT AREA T=0.20mm
④	TERMINAL 4#	1	STAINLESS STEEL	NICKEL UNDERPLATING OVERALL, GOLD FLASH ON THE SOLDER & CONTACT AREA T=0.20mm
③	TERMINAL 3#	1	STAINLESS STEEL	NICKEL UNDERPLATING OVERALL, GOLD FLASH ON THE SOLDER & CONTACT AREA T=0.20mm
②	TERMINAL 2#	1	PHOSPHOR BRONZE	NICKEL UNDERPLATING OVERALL, GOLD FLASH ON THE SOLDER & CONTACT AREA T=0.20mm
①	TERMINAL 1#	1	PHOSPHOR BRONZE	NICKEL UNDERPLATING OVERALL, AGAIN GOLD FLASH ON THE WHOLE AREA; T=0.20mm

DESIGN	Li Jinwei	SCALL		Φ	DRAWG NO.	PJ25A001-06S Φ2.5mm 耳机插座 六脚贴片
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE	TITLE:	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ±0.30 X.°±2°		
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ±0.20 .X°±1°		
				.XXX ±0.10 .XX°±0.5°		

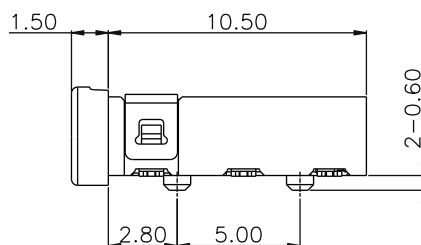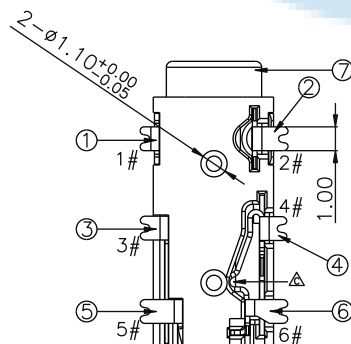

东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>