

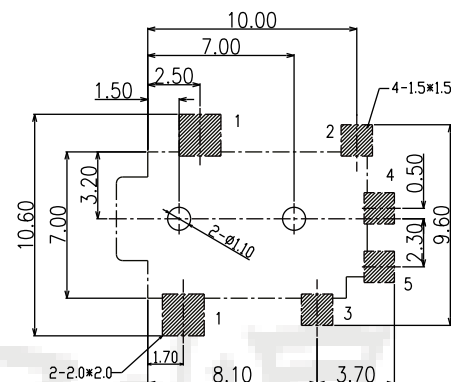

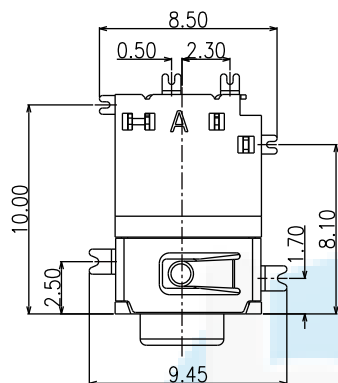


ROHS
Compatible






P.C.B LAYOUT
TOP VIEW


1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;



PJ xA 002- 06 x
↓ ↓ ↓ ↓ ↓
名称 规格 流水号 PIN位 S;贴片
2.5 6;脚

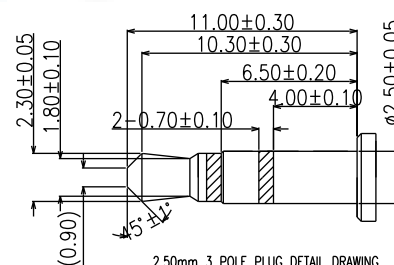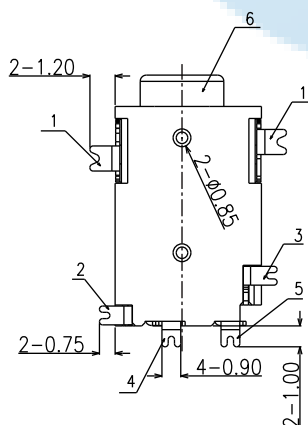

3D VIEW

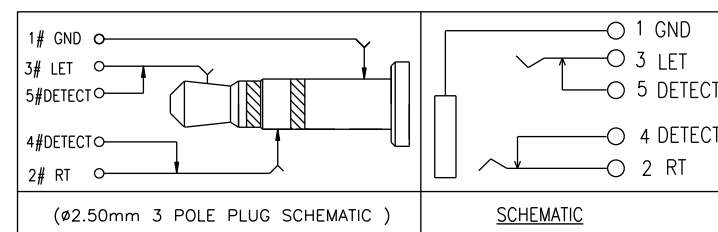

6	HOUSING	1	HIGHT TEMPERATURE PLASTIC COLOR BLACK	
5	TERMINAL 5#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL ; THE WHOLE SILVER PLATING.	T=0.20mm
4	TERMINAL 4#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL ; THE WHOLE SILVER PLATING.	T=0.20mm
3	TERMINAL 3#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL ; THE WHOLE SILVER PLATING.	T=0.20mm
2	TERMINAL 2#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL ; THE WHOLE SILVER PLATING.	T=0.20mm
1	TERMINAL 1#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL ; THE WHOLE SILVER PLATING.	T=0.20mm
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

ϕ	
TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	PJ25A002-06S
TITLE:	Ø2.5mm 耳机插座 六脚贴片

 **东莞市宏煜盛实业有限公司**
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>