
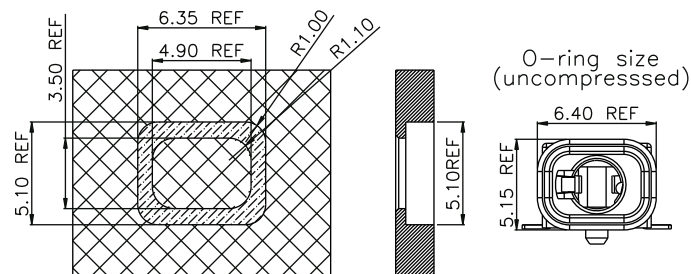



ROHS
Compatible







面板开孔参考尺寸



NOTES

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;
8. TERPROOF LEVEL: IPX7;

PJ xA 081- 05 x x
↓ ↓ ↓ ↓ ↓ ↓
名称 规格 流水号 PIN位 S;贴片 F;防水
2.5 5;脚

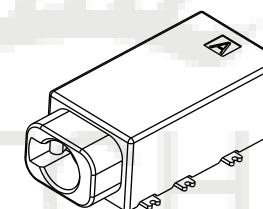

3D VIEW

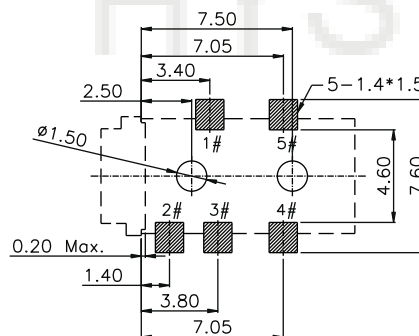

RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLERANCE:±0.05)

Ø2.50mm 4 POLE PLUG DETAIL		Ø2.50mm 4 POLE PLUG SCHEMATIC		SCHEMATIC	
14.00	8.50	5.50	2.50	1# GND(MIC)	3# RT
2.50	2.50	2.50	2.50	5# DETECT	5# DETECT
3-0.70	Ø2.50	Ø2.50	Ø3.00	4# LET	4# LET
				2# MIC(GND)	2# MIC(GND)
4		EPOXY	COLOR BLACK	1	
3	TERMINAL	PHOSPHOR BRONZE	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA	5	
2	COVER	HIGH TEMPERATURE	COLOR BLACK	1	
1	HOUSING	HIGH TEMPERATURE	COLOR BLACK	1	
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY	

DESIGN	Li Jinwei	SCALL		⌀	DRAWG NO.	PJ25A081-05SF	
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE	TITLE:		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ±0.30 X.°±2°	Φ2.5mm 防水耳机插座 五脚贴片 IPX7	 东莞市宏煜盛实业有限公司 Dongguan hongyusheng Industry Co., Ltd TEL: 0769-81230179 https://www.hystypec.com	
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ±0.20 .X°±1°			
				.XXX ±0.10 .XX°±0.5°			