

ROHS
Compatible

机壳面板

密封圈

前后组装方式

此处点胶

Note:

1.Material:

1.1 Housing: LCP

1.2 Contact:C2680,t=0.20mm middleclip SUS t=0.15mm

1.3 Shell: Zinc Alloy.

2.ELECTRICAL:

2-1:CURRENT RATING:

VBUS AND GND CONTACTS RATED AT 1.25A
PARALLELED FOR A TOTAL OF 3A;

2-2:INITIAL CONTACT RESISTANCE :40 MEGOHMS

2-3:DIELECTRIC WITHSTANDING VOLTAGE:
30V AC MIN;

3:MECHANICAL CHARACTERISTICS:

3-1:MATING FORCE:5~20N

3-2:UNMATING FORCE:8~20N(INITIAL),
6~20N(AFTER 10000 CYCLES)

3-3:FREQUENCY: 200±50 CYCLES /HOUR,10000 CYCLES
3-4:OPERATING TEMPERATURE ;-40°~80°.

4: WATERPROOF: IP-X7.

U5 006- 06P x 0.78C 1.0Z 6.7L x
↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓
名称 流水号 PIN位 N;母座 C;沉板 Z;脚距 L;长度 F;防水

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10



ϕ	
TOLERANCE	
X.X	±0.30 X.°±2°
.XX	±0.20 .X.°±1°
.XXX	±0.10 .XX°±0.5°

DRAWG NO.	U5006-06PN0.78C1.0Z6.7LF
TITLE:	防水6P 两脚贴片SMT 沉板0.78mm 脚距1.0mm 6.7L IPX7



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>

ROHS
Compatible

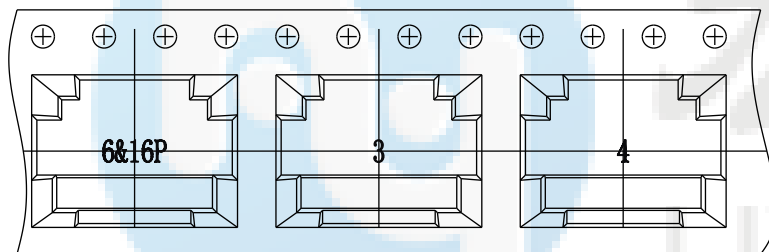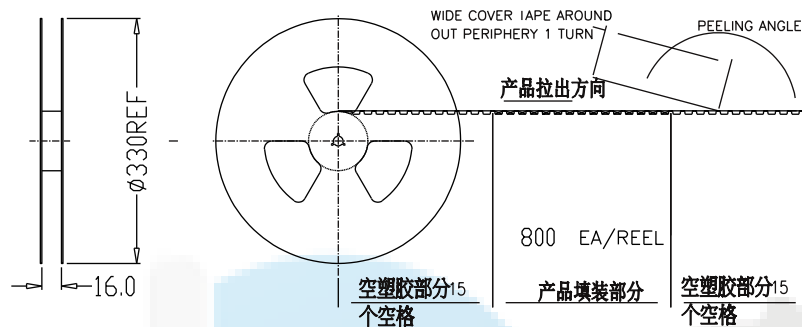


出盘方向



- 说明: 1, 将检查合格的产品, 放入承载带中, 一盒包装800PCS;
2, 将11承载带放入纸箱中;
3, 将纸箱封好, 贴上标签

每箱数量	净重(Kg)	毛重(Kg)
8800PCS	xxx	xxx

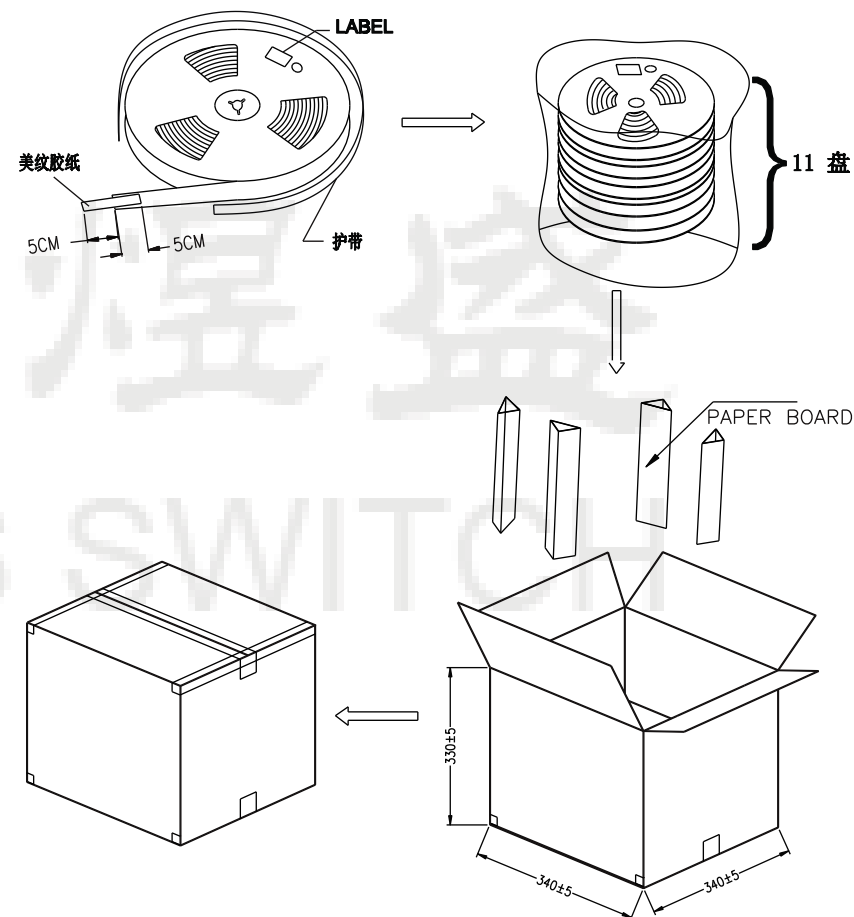

DESIGN	Li Jinwei	SCALE	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.° ±2°
.XX ±0.20	.X° ±1°
.XXX ±0.10	.XX° ±0.5°

DRAWG NO.	U5006-06PN0.78C1.0Z6.7LF
TITLE:	防水6P 两脚贴片SMT 沉板0.78mm 脚距1.0mm 6.7L IPX7

 东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>