
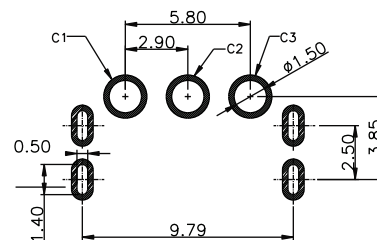



ROHS
Compatible






RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$



NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX5.

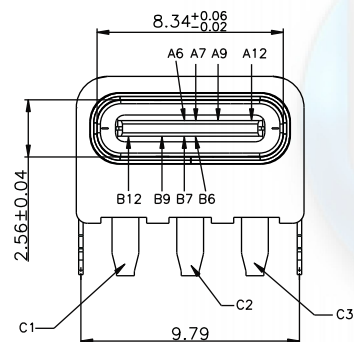

U5 440- 03P x 4.25H 10.8L x
名称 流水号 PIN位 N;母座 H;CH L;长度 F;防水

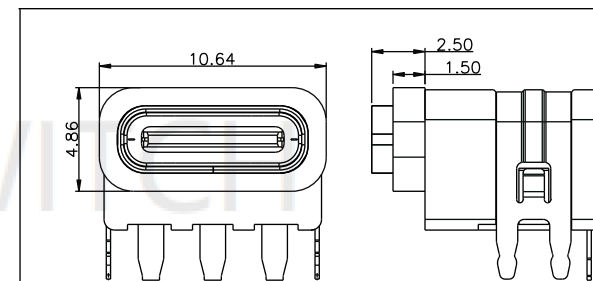

防水圈料号: UH0801-B178

加防水圈示意图

PIN ASSIGNMENT:

PIN NO	A1&B12	A4&B9	A6	A7	B6	B7	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	DP1	DN1	DP2	DN2	VBUS	GND

7	防水圈	硅胶	BLACK	1PCS
6	上盖	SUS304-H T=0.20MM	NI Plated	1PCS
5	铁壳	SUS304-1/2H T=0.30MM	NI Plated	1PCS
4	中铁片	SUS301-3/4H T=0.15MM	NO Plated	1PCS
3	端子	C2680-H T=0.20MM	TIN/Au/NI Plated	1SET
2	塑胶外套	PA9T	BLACK	1PCS
1	胶芯本体	PA9T	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

DESIGN	Li Jinwei	SCALL		
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ± 0.30 X. $^{\circ} \pm 2^{\circ}$
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ± 0.20 .X. $^{\circ} \pm 1^{\circ}$
				.XXX ± 0.10 .XX $^{\circ} \pm 0.5^{\circ}$

DRAWG NO.

U5440-03PN4.25H10.8LF

TITLE: 防水3P 板上四脚插板DIP

垫高 CH=4.25mm 10.8L IPX5



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL: 0752-6632356 <https://www.hystypec.com>