

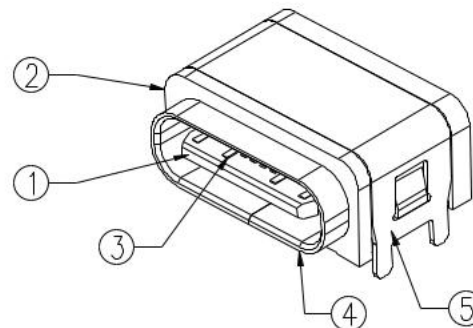
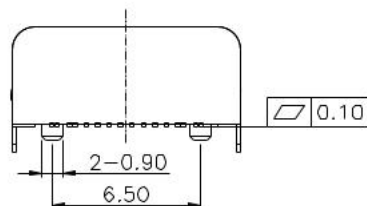


ROHS  
Compatible

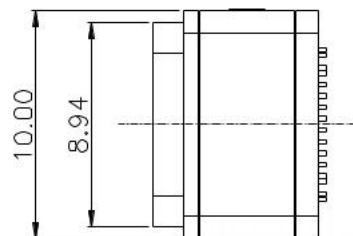



NOTES:

SPECIFICATION:


1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

U5 025- 16P x 7.23L x  
名称 流水号 PIN位 N/母座 L/长度 F/防水


|     |             |     |             |
|-----|-------------|-----|-------------|
| A1  | GND         | B12 | GND         |
| A4  | VBUS        | B9  | VBUS        |
| A5  | CC1         | B8  | SBU2        |
| A6  | DP1         | B7  | DN2         |
| A7  | DN1         | B6  | DP2         |
| A8  | SBU1        | B5  | CC2         |
| A9  | VBUS        | B4  | VBUS        |
| A12 | GND         | B1  | GND         |
| PIN | SIGNAL NAME | PIN | SIGNAL NAME |

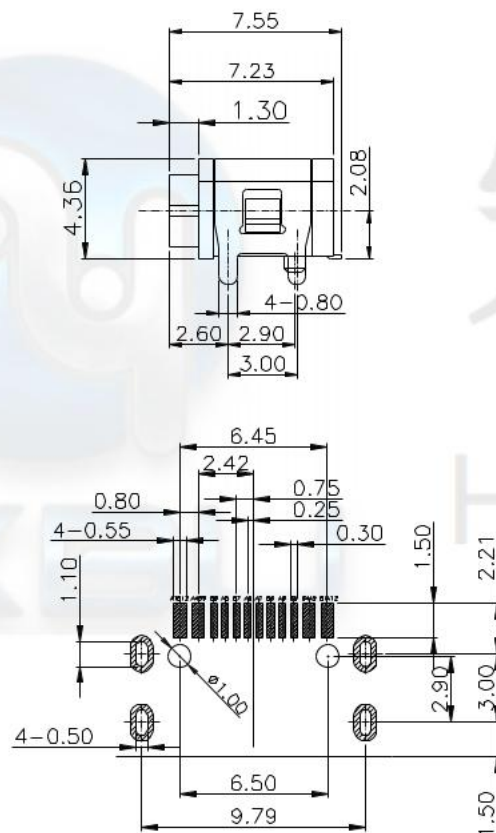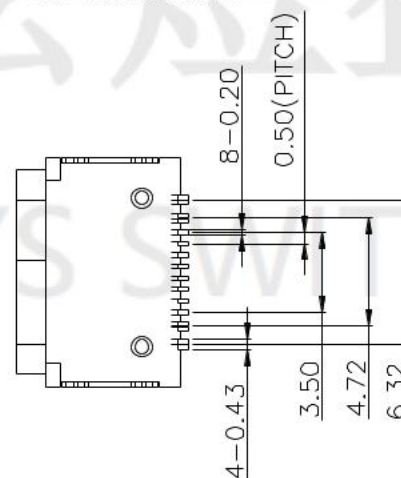

RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

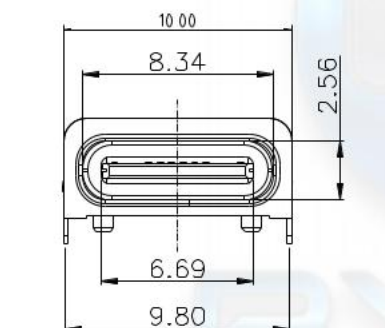

建议胶圈尺寸

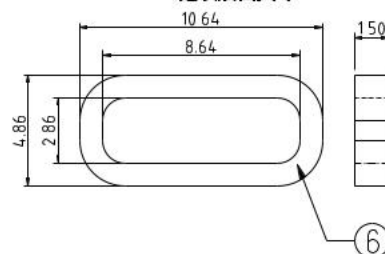

|     |                 |                          |              |      |
|-----|-----------------|--------------------------|--------------|------|
| 6   | 防水圈             | 硅胶                       | BLACK        | 1PCS |
| 5   | SHELL           | STAINLESS STEEL          | NI Plated    | 1PCS |
| 4   | SHIELDING PLATE | STAINLESS STEEL          | NI Plated    | 1PCS |
| 3   | CONTACT         | High Conductivity Copper | Au/NI Plated | 1SET |
| 2   | SHELL HOUSING   | HIGH TEMPERATURE PLASTIC | BLACK        | 1PCS |
| 1   | HOUSING         | HIGH TEMPERATURE PLASTIC | BLACK        | 1PCS |
| NO. | DESCRIPTION     | MATERIAL                 | REMARKS      | QTY  |

|          |               |       |               |
|----------|---------------|-------|---------------|
| DESIGN   | Li Jinwei     | SCALL |               |
| DRAWING  | Wu Qifa       | UNIT  | mm            |
| CHECK    | Zheng Jinxian | SIZE  | A4: 210 * 297 |
| APPROVAL | Liu Xiaohong  | DATE  | 2020-06-10    |

|            |           |
|------------|-----------|
|            | TOLERANCE |
| X.X ±0.30  | X.*±2°    |
| .XX ±0.20  | .X° ±1°   |
| .XXX ±0.10 | .XX°±0.5° |

DRAWG NO.

U5025-16PN7.23LF

TITLE:

防水16P板上型四脚插板SMT 7.23L IP66





广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>

**ROHS**  
Compatible

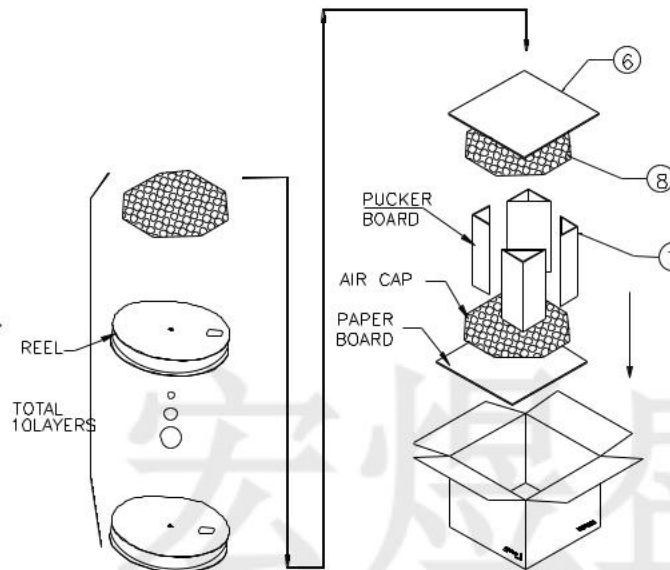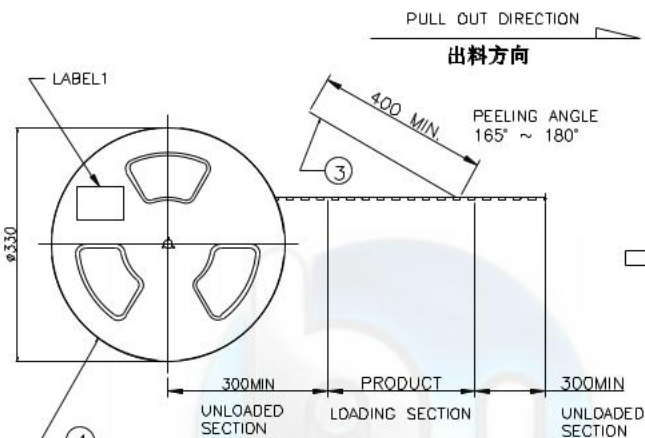

备注:

1. 包装方式

1-1: 使用半自动包装机, 先将 CARRY TAPE 送入导轨中, 并与 COVER TAPE 贴合在上面, 其中前端20空槽不要放产品, 尾端20空槽不要放产品, 然后将产品如图示方向依次放入 CARRY TAPE 每个槽放1PCS;

1.2. 用胶带将 CARRY TAPE 压合在一起, 真空包装后在图示指定位置贴上 LABEL;

1-3: 按图示要求将10盘包装好的 REEL 套入防水袋后装入纸箱, 纸箱上下按图示要求加垫硬纸板和海绵垫, 四角折三角垫固定;

1-4: 将装好产品的纸箱按图示要求封箱, 在指定区域贴好 LABEL;

2. 包装数量:



900PCS/REEL;

10REEL (9000PCS) /CARTON.

3. 耐剥离性:

上带引拔力测试规格: 20-150gf

测试条件: 以每分钟300mm速度引拔测试

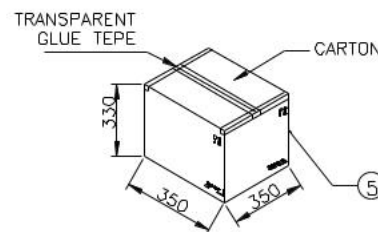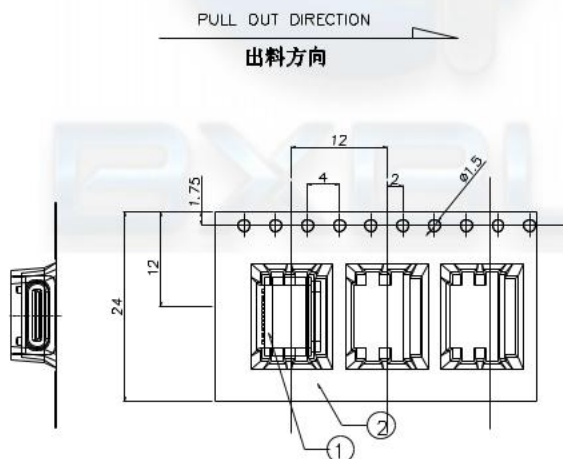

|          |               |       |               |                                                                               |                            |
|----------|---------------|-------|---------------|-------------------------------------------------------------------------------|----------------------------|
| DESIGN   | Li Jinwei     | SCALL |               | <br>TOLERANCE<br>X.X ±0.30 X.°±2°<br>.XX ±0.20 .X°±1°<br>.XXX ±0.10 .XX°±0.5° | DRAWG NO.                  |
| DRAWING  | Wu Qifa       | UNIT  | mm            |                                                                               | U5025-16PN7.23LF           |
| CHECK    | Zheng Jinxian | SIZE  | A4: 210 * 297 |                                                                               | TITLE:                     |
| APPROVAL | Liu Xiaohong  | DATE  | 2020-06-10    |                                                                               | 防水16P板上型四脚插板SMT 7.23L IP66 |



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>