




ROHS
Compatible

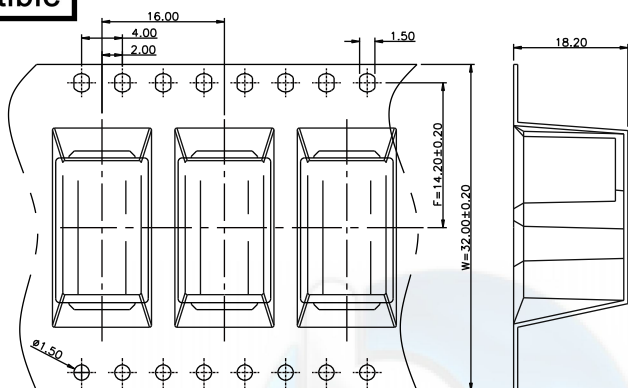

① 产品入载带示意图

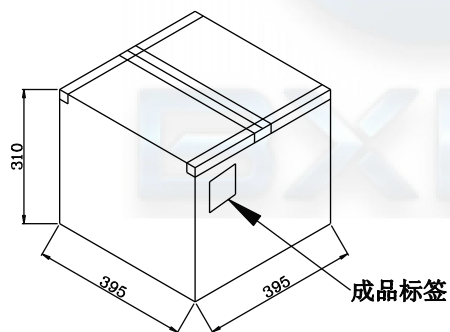


⑤ 外箱封箱示意图

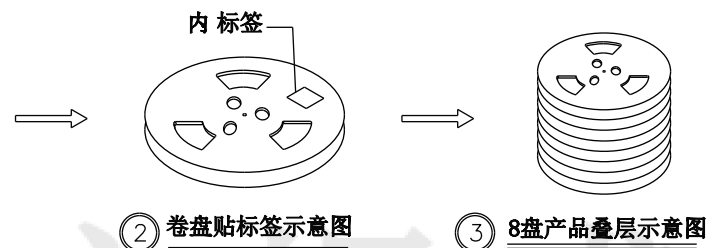


② 卷盘贴标签示意图

③ 8盘产品叠层示意图

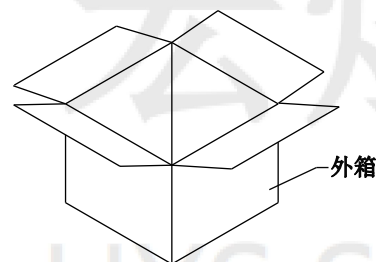

④ 产品入外箱示意图

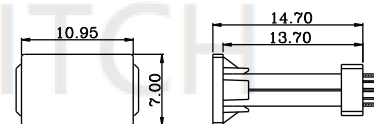

包装说明:

1. 将检验好的成品;焊脚朝下放入载带底部;每卷装320PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每8盘叠;具体如图三所示
5. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
(产品包装的标签,如客户有要求,请按客户要求包装出货)
6. 载带前面留5PCS空格,后面留5PCS空格
7. COVER与CARRY剥离力:50-125g,速度:300mm/分钟左右,
剥离角度:165°-180°

DESIGN	Li Jinwei	SCALL			DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE	U5102-16PN1.8D2.2J13.7L
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ±0.30 X.°±2°	TITLE: 16P 板上四脚插板DIP
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ±0.20 .X°±1°	针长1.8mm 脚长2.2mm 13.7L
				.XXX ±0.10 .XX°±0.5°	



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>