


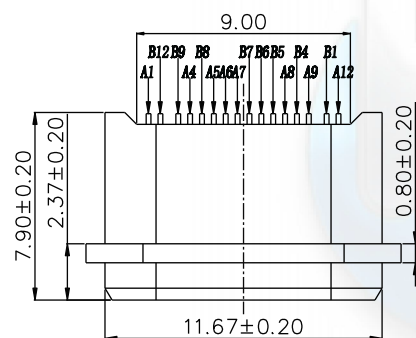


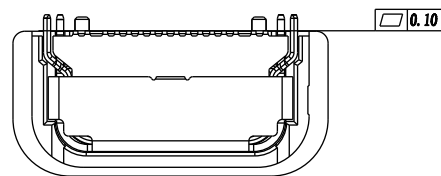
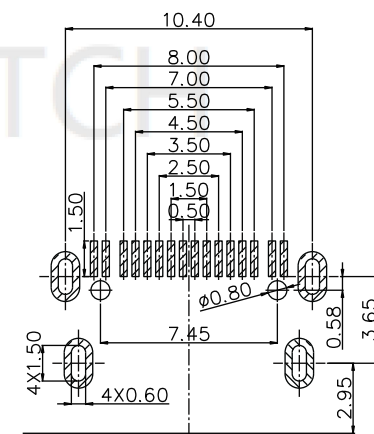


ROHS
Compatible

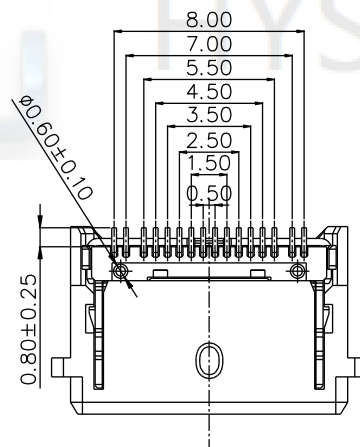

- NOTES:**
1. MECHANICAL: MATING FORCE: 5-20N .
UNMATING FORCE: 8-20N .
DURABILITY: 10000 CYCLES MIN.
 2. ELECTRICAL:
CURRENT: 5.0A MAX
VOLTAGE: 20V MAX
WITHSTANDING VOLTAGE: 100V AC
CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
50 mΩ MAX AFTER 10000 CYCLES
 3. ENVIRONMENTAL:
OPERATING TEMPERATURE RANGE -30° C ~ +80° C
 4. Salt Spray: 24H

U5 184- 16P x 1.6G 7.9L
↓ ↓ ↓ ↓ ↓
名称 流水号 PIN位 N;母座 G;垫高 L;长度

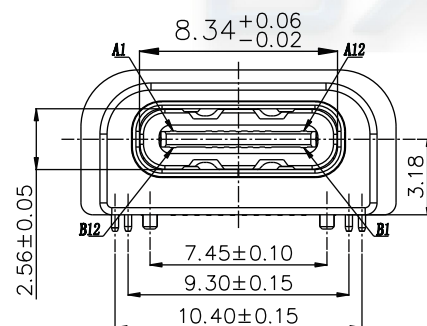

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm		U5184-16PN1.6G7.9L
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10		TYPE-C 16P 三星25W 四脚插板SMT 垫高1.6mm 7.9L



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL: 0752-6632356 <https://www.hystypec.com>