


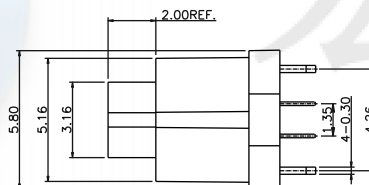
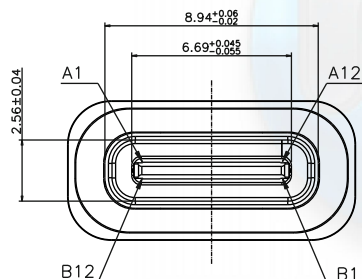




ROHS
Compatible



SPECIFICATION:

1、ELECTRICAL:

- 1.1 CURRENT RATING:5A;
- 1.2 CONTACT RESISTANCE:30mΩ Max;
- 1.3 DIELECTRIC WITHSTANDING VOLTAGE:100V AC;
- 1.4 INSULATION RESISTANCE:100 MΩ MIN;

2、MECHANICAL:

- 2.1 MATING FORCE:5~20N;
- 2.2 UNMATING FORCE:8~20N;
- 2.3 DURABILITY:10000 CYCLES;6~20N AFTER DURABILITY TEST;

3、MATERIAL:

- 3.1 OUTER COVER: HIGH TEMPERATURE PLASTIC;
- 3.2 BODY HOUSING:HIGH TEMPERATURE PLASTIC;
- 3.3 TERMINAL:COPPER ALLOY;
- 3.4 SHELL:STAINLESS STEEL;
- 3.5 MID PLATE:STAINLESS STEEL;

4、PLATING SPECIFICATION:

- 4.1 TERMINAL:CONTACT AREA GOLD PLATED G/F
PIN WELDING AREA GOLD PLATED G/F
- 4.2 SHELL:PLATED Ni 30u" MIN
- 4.3. MID PLATE:CLEAR ONLY

5、SMT REFLOW SOLDERING (PEAK VALUE 260 °C ± 5 ° C)
SHALL BE FREE OF BLISTERING, GLUE MELTING AND
POOR COLOR CHANGE (DEFORMATION WITHIN TOLERANCE)


6、OPERATING TEMPERATURE: -40°C~+85°C

7、WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX8.

U5 202- 16P x 7.2L x
↓ ↓ ↓ ↓ ↓
名称 流水号 PIN位 N;母座 L;长度 F;防水




DESIGN	Li Jinwei	SCALL			DRAWG NO.	 广东宏煜盛电子科技有限公司 Guangdong Hongyusheng Electronic Technology Co., Ltd TEL:0752-6632356 https://www.hystypec.com	
DRAWING	Wu Qifa	UNIT	mm		TOLERANCE		U5202-16PN7.2LF
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		X.X ±0.30 X.°±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX°±0.5°		TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10		防水16P 立式四脚插板DIP 7.2L IPX8		

ROHS
Compatible




建议的胶圈尺寸

Suggested adsorption size



Install suction cap diagram



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$



PIN ASSIGNMENT:

Pin No.	Signal Name	Pin No.	Signal Name
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10


TOLERANCE	
X.X ± 0.30	X. $^{\circ} \pm 2^{\circ}$
.XX ± 0.20	.X $^{\circ} \pm 1^{\circ}$
.XXX ± 0.10	.XX $^{\circ} \pm 0.5^{\circ}$

DRAWG NO.	U5202-16PN7.2LF
TITLE:	防水16P 立式四脚插板DIP 7.2L IPX8




广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL: 0752-6632356 <https://www.hystypec.com>


ROHS
Compatible

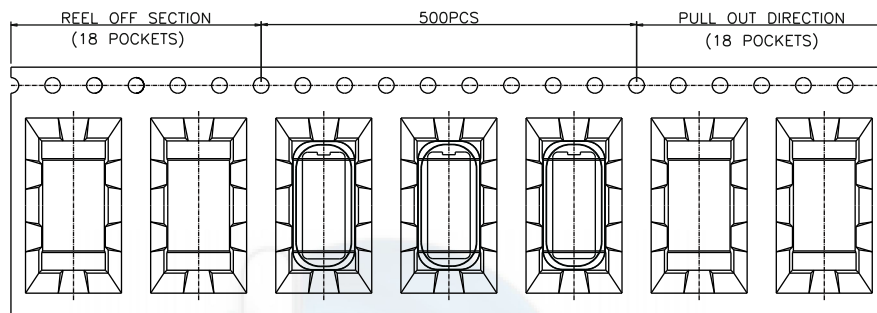


① 产品入载带示意图

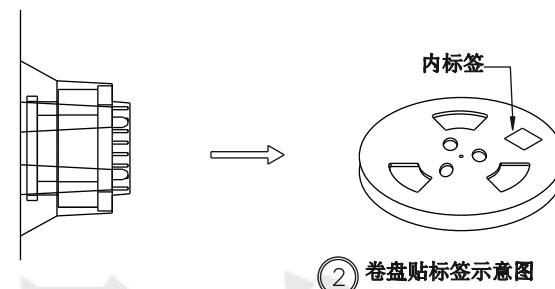

② 卷盘贴标签示意图

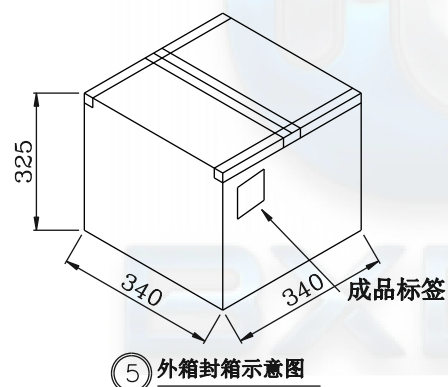

⑤ 外箱封箱示意图

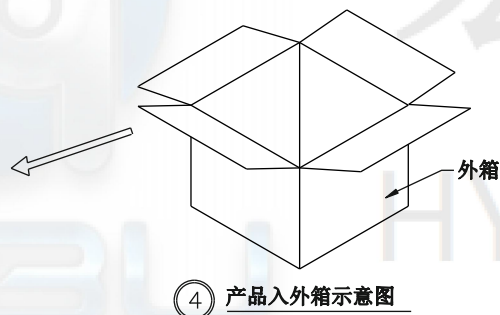

④ 产品入外箱示意图



③ 11盘产品叠层示意图

包装说明:

1. 将检验好的成品;对插口朝前放入载带;每卷装500PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每11盘叠;具体如图三所示
4. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
(产品包装的标签,如客户有要求,请按客户要求包装出货)
5. 载带前面留18PCS空格,后面留18PCS空格
6. COVER与CARRY剥离力:50-125g,速度:300mm/分钟左右,剥离角度:165°-180°

CONNECTOR (PCS)	REEL	CARTON
	500	5500

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.° ±2°
.XX ±0.20	.X° ±1°
.XXX ±0.10	.XX° ±0.5°

DRAWG NO.	U5202-16PN7.2LF
TITLE:	防水16P 立式四脚插板DIP 7.2L IPX8

 **广东宏煜盛电子科技有限公司**
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL: 0752-6632356 <https://www.hystypec.com>