
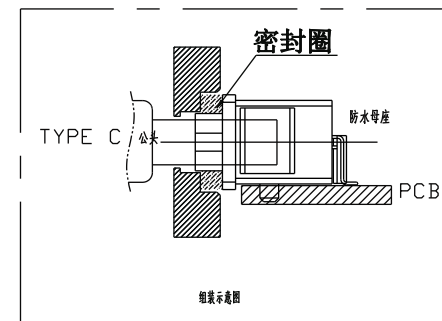
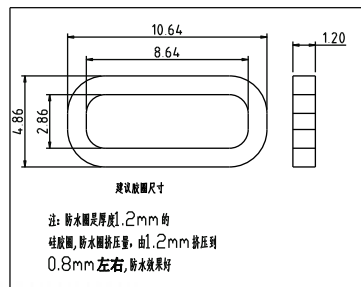


ROHS
Compatible

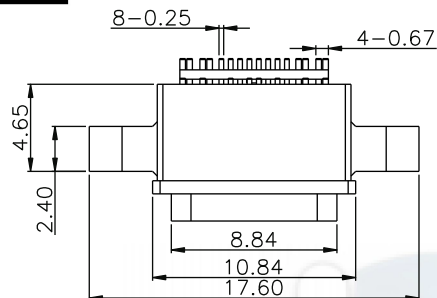

NOTES:

1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";

3. ELECTRICAL :

3-1.CONTACT CURRENT RATING :

5A(VBUS PIN 1.5A/PIN),

5A(GND PIN 1.25A/PIN MAX),0.25A/PIN(OTHER PIN).

3-2.INSULATION RESISTANCE :

100 MEGAOHMS MIN. AT 250VDC.

3-3.DIELECTRIC WITHSTANDING VOLTAGE :

100VAC MIN.

3-4.LOW LEVEL CONTACT RESISTANCE :

INITIAL 40mΩ MAX.

AFTER 50mΩ MAX.



4.MECHANICAL CHARACTERISTICS :




4-1. MATING FORCE: 5~20N;

4-2. UNMATING FORCE: 8~20N(INITIAL),6~20N(AFTER 10000 CYCLES);

4-3.DURABILITY : 10,000 MATING CYCLES.

4-4.OPERATING TEMPERATURE : -40°C TO +80°C

U5 281- 16P x x 7.3L x
↓ ↓ ↓ ↓ ↓ ↓
名称 流水号 PIN位 N;插座 M;带耳 L;长度 F;防水

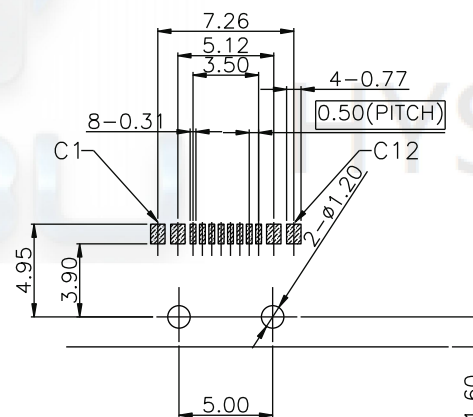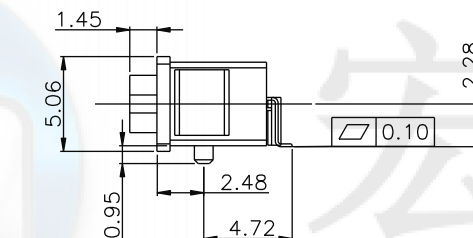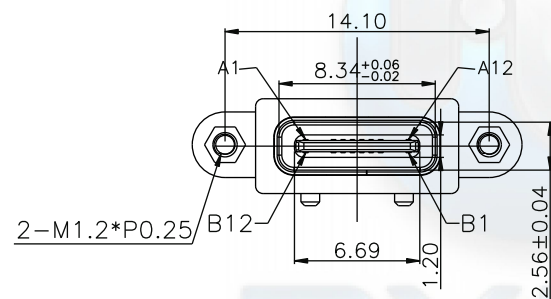

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

INTERFACE(FRONT VIEW)

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	DP1	DN1	SBU1	VBUS			GND
GND			VBUS	SBU2	DN2	DP2	CC2	VBUS			B1
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	

PIN ASSIGNMENT

PIN NO.	A1&B12	A4&B9	B8	A5	B7	A6	A7	B6	A8	B5	A9&B4	A12&B1
SINGAL NAME	GND	VBUS	SBU2	CC1	DN2	DP1	DN1	B6	SBU1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12

TABLE 1:

⑥	Shell-2	1	Stainless steel	NI PLATING;	T=0.20mm
⑤	Shell-1	1	Stainless steel	NI PLATING;	T=0.25mm
④	MID PLATE	1	Stainless steel		T=0.15mm
③	Terminal-B	8	铜镍硅合金	Au:3u" PLATING;	T=0.15mm
②	Terminal-A	8		Au:3u" PLATING;	T=0.15mm
①	Housing	1	HIGH TEMP	Black	
NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

⌀	
TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	U5281-16PNM7.3LF
TITLE:	防水16P 板上SMT 带柱带耳 7.3L PIX8

 **广东宏煜盛电子科技有限公司**
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>