

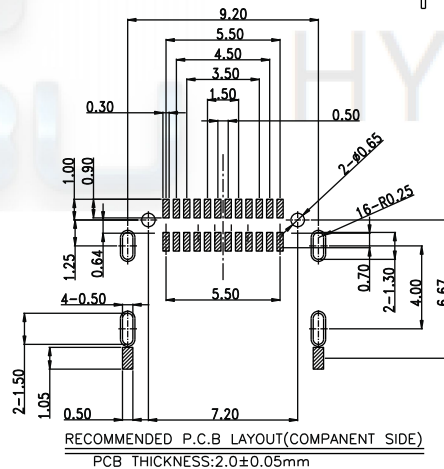



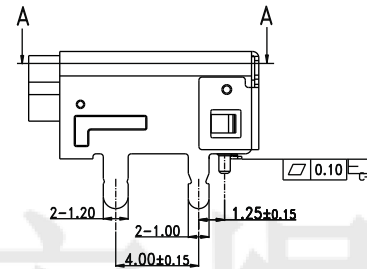
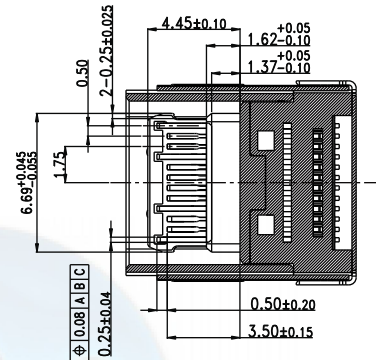


ROHS
Compatible

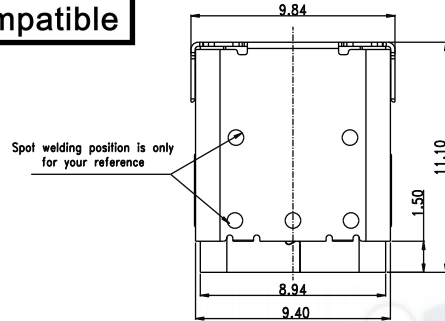

NOTES:

- 1.MATERIAL :SEE TABLE
 - 2.COPLANARITY : 0.10 Max.
 - 3.ELECTRICAL CHARACTERISTICS
LOW LEVEL CONTACT RESISTANCE: 40mΩ Max
INSULATION RESISTANCE:100MΩ MIN
DIELECTRIC WITHSTANDING VOLTAGE:100 VAC:
CONTACT CURRENT RATING:5A Max
 - 4.MECHANICAL CHARACTERISTICS
INSERTION FORCE: 5~20N
EXTRACTION FORCE: 8~20N
AFTER DURABILITY EXTRACTION FORCE: 6~20N
 - 5.DURABILITY: 10000 CYCLES
 - 6.PACKAGING TYPE: CARRIER TAPE.
 - 7.SALT SPRAY : 24 HOURS
- U5 303- 24P x 3.4H 11.1L
↓ ↓ ↓ ↓ ↓
名称 流水号 PIN位 N;母座 H;CH L;长度



Pin No	Signal Name	Mating Sequence	Pin No	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	TX1+	Second	B11	RX1+	Second
A3	TX1-	Second	B10	RX1-	Second
A4	Vaus	First	B9	Vaus	First
A5	CC1	Second	B8	SBU2	Second
A6	D+	Second	B7	D-	Second
A7	D-	Second	B6	D+	Second
A8	SBU1	Second	B5	CC2	Second
A9	Vaus	First	B4	Vaus	First
A10	RX2-	Second	B3	TX2-	Second
A11	RX2+	Second	B2	TX2+	Second
A12	GND	First	B1	GND	First
SHELL GND First					

6	OUTER-SHELL	1	SUS304	SOLDER NICKEL: 50U" MIN
5	INNER-SHELL	1	SUS301	SOLDER NICKEL: 50U" MIN
4	TOP TERMINAL	1	C7025	MATING AREA:AU 3u" SOLDER TAIL:MATTE TIN 100 MIN, 50u" NICKEL OVERALL.
3	BOTTOM TERMINAL	1	C7025	MATING AREA:AU 3u" SOLDER TAIL:MATTE TIN 100 MIN, 50u" NICKEL OVERALL.
2	MID PLATE	1	SUS301	NO PLATING
1	MAIN HOUSING	1	HIGH TEMPERATURE	LCP,BLACK
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH
BILL OF MATERIAL				


DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm		U5303-24PN3.4H11.1L
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10		24P 板上四脚插板双排SMT CH=3.4 11.1





广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

出料方向
PULL OUT DIRECTEON

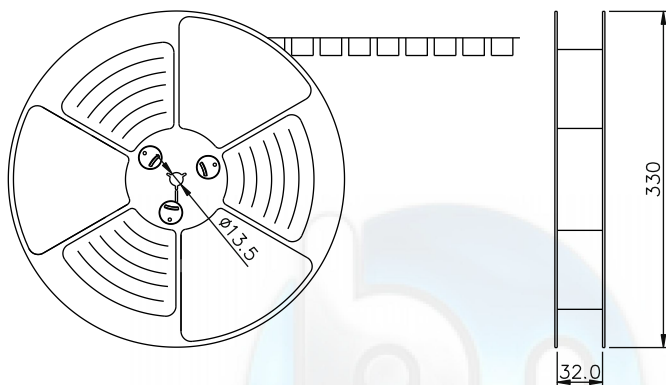

出料方向
PULL OUT DIRECTEON

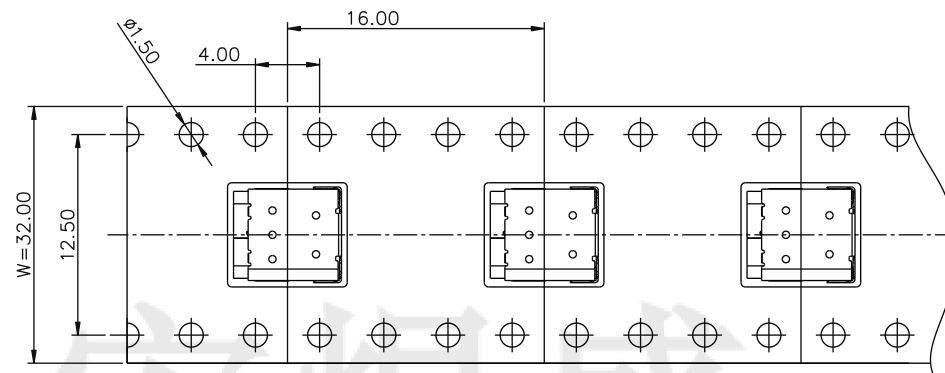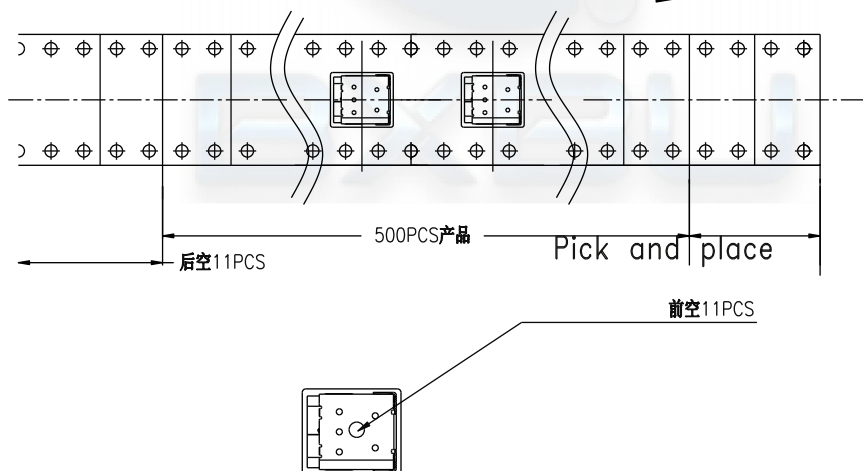

TAPE & REEL 10 PCS

1 REEL
= 500 PCS

BOX

DIMENSIONS:
340X340X380

LABEL

1 CARTON
=10 REELS
=5000 PCS

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.	U5303-24PN3.4H11.1L
DRAWING	Wu Qifa	UNIT	mm		TITLE:	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		24P 板上四脚插板双排SMT CH=3.4 11.1L	 广东宏煜盛电子科技有限公司 Guangdong Hongyusheng Electronic Technology Co., Ltd. TEL:0752-6632356 https://www.hystypec.com
APPROVAL	Liu Xiaohong	DATE	2020-06-10			