

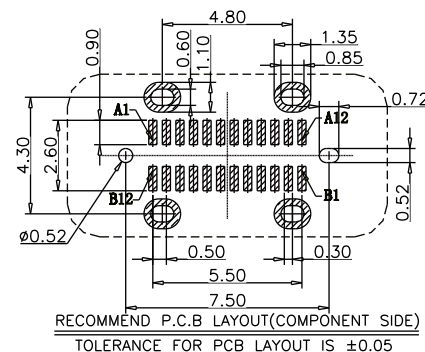
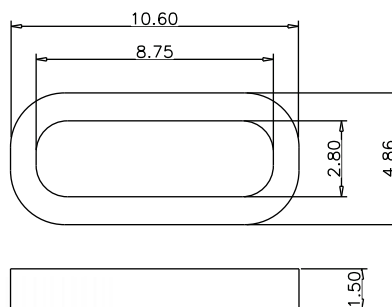
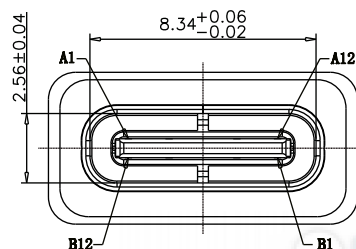


ROHS

Compatible

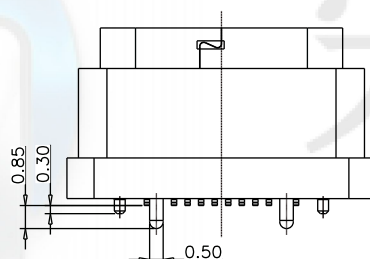


防水圈尺寸图

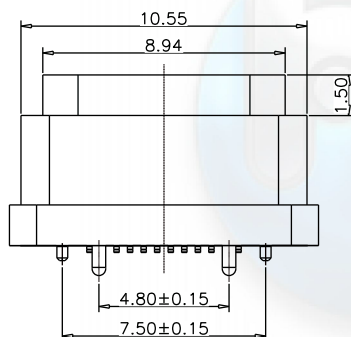

NOTE:

1. MECHANICAL PERFORMANCE:
1-1. INSERTION FORCE: 0.5~2.0kgf.
1-2. EXTRACTION FORCE: 0.8kgf~2.0kgf.
0.6kgf~2.0kgf. AFTER DURABILITY TEST.
1-3. DURABILITY: 10000 CYCLES.
2. ELECTRICAL PERFORMANCE:
2-1. CURRENT RATING: 5.0A
VOLTAGE RATING: 5.0V
2-2. LLCR:
VBUS & GND PINS AND OTHER PINS
SHIELD: 50mΩ/MAX.
LCR MAX. RESISTANCE OF ALL PINS: 10
2-3. INSULATION RESISTANCE: 100MΩ MIN
2-4. DIELECTRIC WITHSTAND VOLTAGE: AC 100V
3. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
4. IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SURFACE
BE MAINTAINED FOR 10 SECONDS AT 260°C
5. 符合ROHS&HF要求。
6. SALT SPRAY TEST REQUIRES 48H

U5	326-	24P	x	6.55L	x
↓	↓	↓	↓	↓	↓
名称	流水号	PIN位	N:母座	L:长度	F:防水



PIN	NUMBER	SIGNAL NAME	PIN	NUMBER	SIGNAL NAME
A1		GND	B12		GND
A2		SSTXp1	B11		SSRXp
A3		SSTXn1	B10		SSRXn
A4		VBUS	B9		VBUS
A5		CC1	B8		SBU2
A6		Dp1	B7		Dn2
A7		Dn1	B6		Dp2
A8		SBU1	B5		CC2
A9		VBUS	B4		VBUS
A10		SSRXn2	B3		SSTXn2
A11		SSRXp2	B2		SSTXp2
A12		GND	B1		GND

NO	PART	Q'TY	MATERIAL
1	SHELL	1	STAINLESS STEEL 304, NI 30u" MIN PLATED
2	EMI Plate	1	STAINLESS STEEL 301,NI 30u" MIN PLATED
3	Mid Plate	1	STAINLESS STEEL 301, NI PLATED
4	CONTACT	24	COPPER STEEL C18400,接触鍍金3u" 焊接區0.7F, 焊底50u" Min
5	1MD HOUSING	1	LCP BLACK UL94 V-0
6	2MD HOUSING	1	LCP BLACK UL94 V-0
7	PLASTIC SHELL	1	PA10T BLACK UL94 V-0
8	CAP	1	LCP BLACK UL94 V-0
9	防水胶		硅胶8935

DESIGN	Li Jinwei	SCALL		 TOLERANCE	DRAWG NO. U5326-24PN6.55LF
DRAWING	Wu Qifa	UNIT	mm		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		
APPROVAL	Liu Xiaohong	DATE	2020-06-10		
				X.X ±0.30 X°.±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX°±0.5°	TITLE: 防水24P 立式四脚插板SMT 6.55L IPX7



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>

防水24P 立式四脚插板SMT 6.55L IPX7