



ROHS
Compatible









- Note:
1. Material:
 - 1.1 Housing: LCP
 - 1.2 Contact: C7025, t=0.20mm
 - 1.3 Shell: SUS316
 2. ELECTRICAL:
 - 2-1: CURRENT RATING:
VBUS AND GND CONTACTS RATED AT 1.25A
PARALLELED FOR A TOTAL OF 5A;
 - 2-2: INITIAL CONTACT RESISTANCE :40 MEGOHMS
 - 2-3: DIELECTRIC WITHSTANDING VOLTAGE:
100V AC MIN;
 - 3: MECHANICAL CHARACTERISTICS:
 - 3-1: MATING FORCE: 5~20N
 - 3-2: UNMATING FORCE: 8~20N (INITIAL),
6~20N (AFTER 10000 CYCLES)
 - 3-3: FREQUENCY: 200±50 CYCLES /HOUR,
10000 CYCLES
 - 3-4: OPERATING TEMPERATURE : -40°~80°.



U5 350- 16P x x 6.68L x
↓ ↓ ↓ ↓ ↓ ↓
名称 流水号 PIN位 N;母座 W;舌头外露 L;长度 F;防水

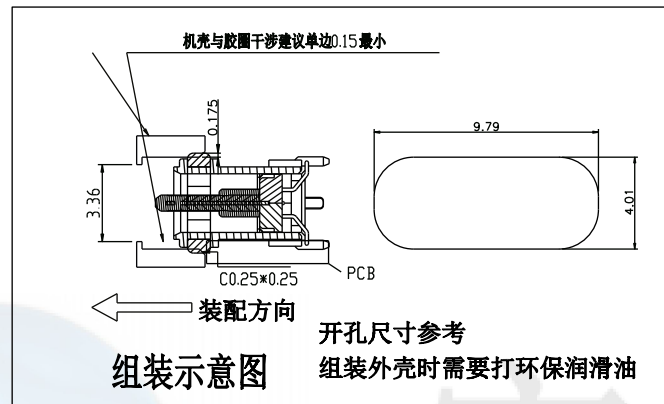

开孔尺寸参考
组装机壳时需要打环保润滑油

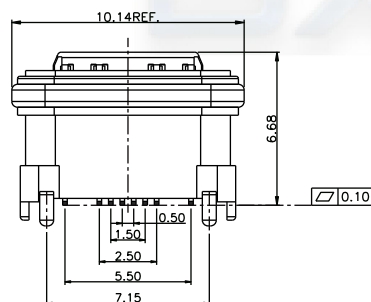

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

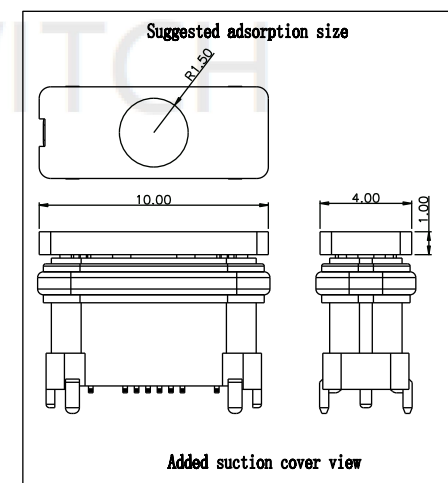

DESIGN	Li Jinwei	SCALL			DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm		U5350-16PNW6.68LF
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10		防水16P 四脚插板SMT 舌头外露 带柱 双筋 6.68L IPX7




广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL: 0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

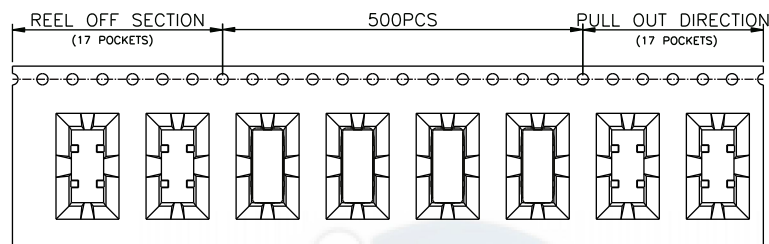


① 产品入载带示意图


内 标签

② 卷盘贴标签示意图

③ 11盘产品叠层示意图

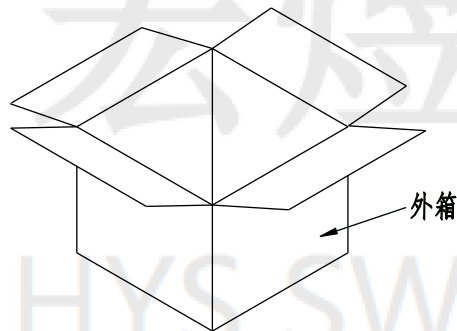

④ 产品入外箱示意图

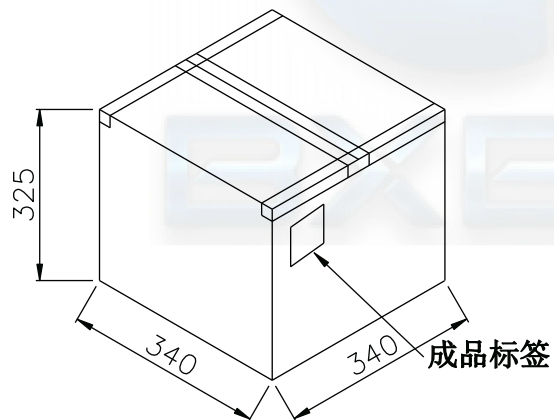

⑤ 外箱封箱示意图

包装说明:

1. 将检验好的成品;对插口朝前放入载带;每卷装500PCS产品;
2. 将包装好的产品;每盘必须贴上内标签;
3. 将贴好内标签的产品每11盘叠;
4. 装好后并封好纸箱及贴好相关标签;
(产品包装的标签, 如客户有要求, 请按客户要求包装出货)
5. 载带前面留17PCS空格, 后面留17PCS空格

CONNECTOR (PCS)	REEL	CARTON
	500	5500

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	U5350-16PNW6.68LF
TITLE:	防水16P 四脚插板SMT 舌头外露 带柱 双筋 6.68L IPX7



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>