


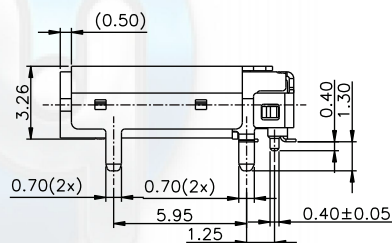
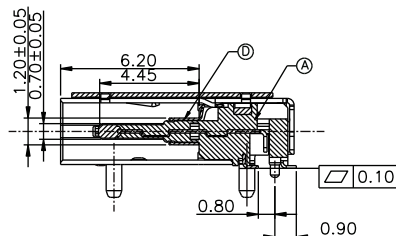

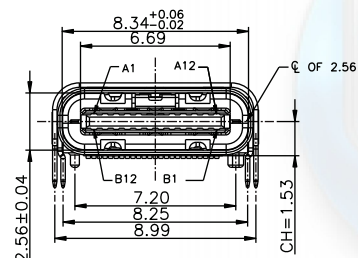


ROHS
Compatible



NOTE:

1.MECHANICAL:

1.1 INSERTION FORCE 5N ~ 20N

1.2 WITHDRAWAL FORCE 8N ~ 20N FOR INITIAL,
6N~20N AFTER TEST

1.3 Durability :10,000 cycles

2.ELECTRICAL:

2.1 CURRENT RATING: 5.0A,

VOLTAGE RATING: 30.0V

2.2 LLCR:VBUS&GND AND OTHER PIN:40 mQ(MAX) INITIAL,
SHIELD:50 mQ(MAX)

LLCR CHANGE OF ALL PINS:10 mQ(MAX)

2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC FOR 1 MINUTE

2.4 INSULATION RESISTANCE : 100 MΩ MIN


3.ENVIRONMENTAL:

OPERATION TEMPERATURE : -25°C~ +85°C.

4.IR REFLOW:

THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C

U5 388- 24P x 1.35G 10.5L
名称 流水号 PIN位 N;母座 H;CH L;长度

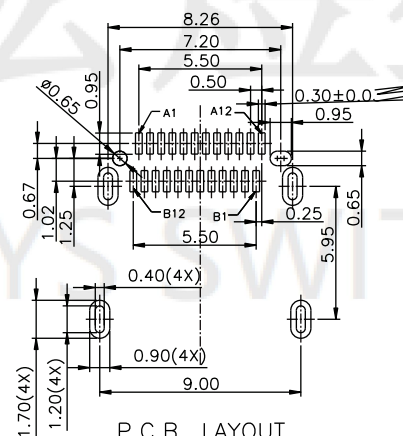

P.C.B. LAYOUT

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
	GND		GND

MATERIAL LIST:

6	MID PLATE	1	SUS301	NICKEL PLATED
5	EMI SPRING	1	SUS304	CLER ONLY
4	OUTER SHELL	1	SUS301	NICKEL PLATED
3	FRONT SHELL	1	SUS304	NICKEL PLATED
2	TERMINAL	24	C18150	3U AU/TIN PLATED
1	HOUSING	1	LCP BLACK	(UL94V-0)
No.	PART NAME	QTY	MATERIAL	REMARK

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

DRAWG NO.

U5388-24PN1.53H10.5L

TITLE:

24P 板上四脚插板SMT 带柱 CH=1.53L 10.5L



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>