
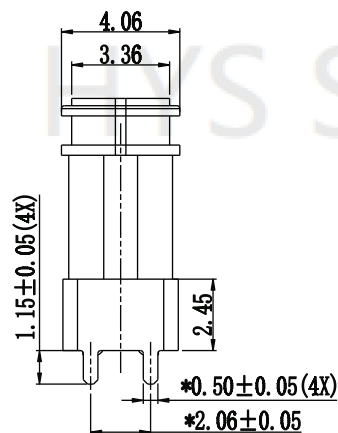
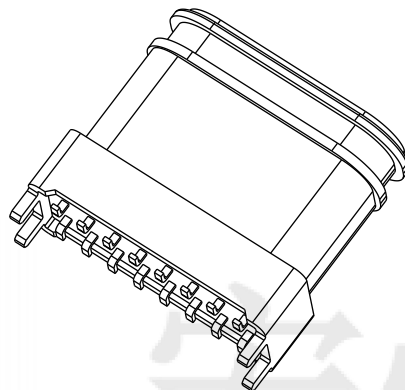


ROHS
Compatible

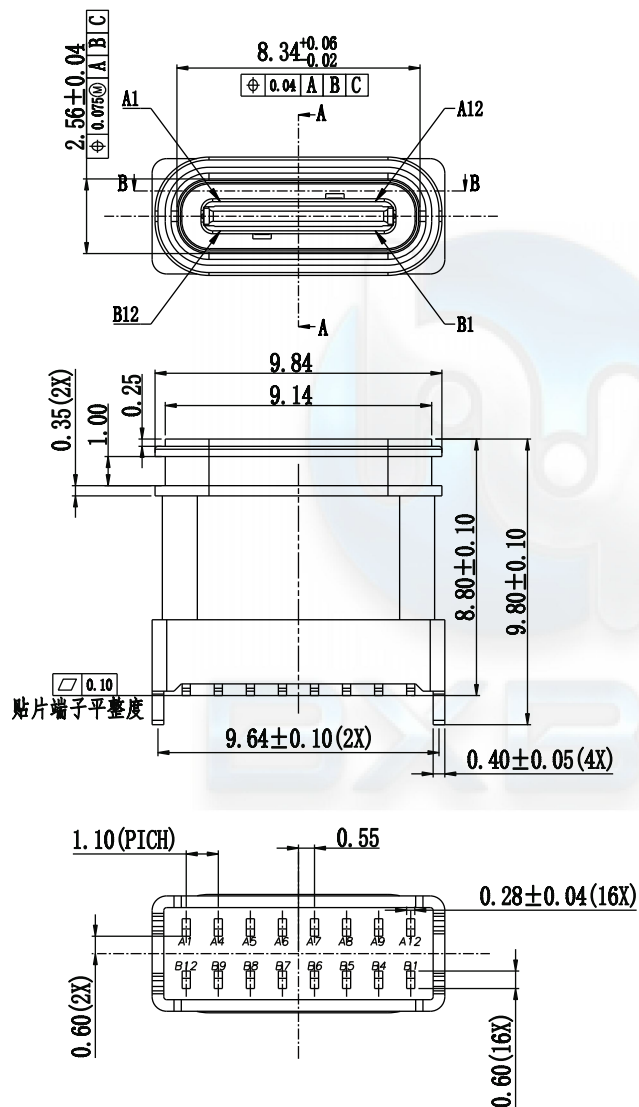

Note:

1. Material:

- 1.1 Housing: LCP
- 1.2 Contact: C2680, T=0.15mm
- 1.3 Shell: SUS316

2. ELECTRICAL:

2-1: CURRENT RATING:

VBUS AND GND CONTACTS RATED AT 1.25A
PARALLELED FOR A TOTAL OF 5A;

2-2: INITIAL CONTACT RESISTANCE : 40 MEGOHMS

2-3: DIELECTRIC WITHSTANDING VOLTAGE:
100V AC MIN;

3: MECHANICAL CHARACTERISTICS:

3-1: MATING FORCE: 5~20N

3-2: UNMATING FORCE: 8~20N (INITIAL),
6~20N (AFTER 10000 CYCLES)

3-3: FREQUENCY: 200±50 CYCLES / HOUR,
10000 CYCLES

3-4: OPERATING TEMPERATURE ; -40° ~ 80° .

U5 400- 16P x 8.8L x
名称 流水号 PIN位 N;母座 L;长度 F;防水

DESIGN	Li Jinwei	SCALL			DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm		U5400-16PN8.8LF
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10		防水16P 直立四脚插板SMT 式粉末冶金外壳双圈 8.8L IPX7




广东宏煜盛电子科技有限公司


Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL: 0752-6632356 <https://www.hystypec.com>


ROHS
Compatible

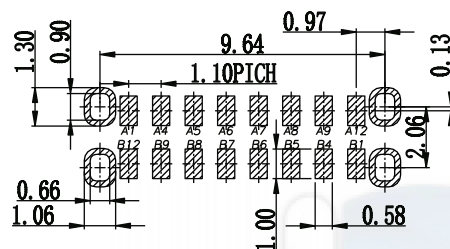


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

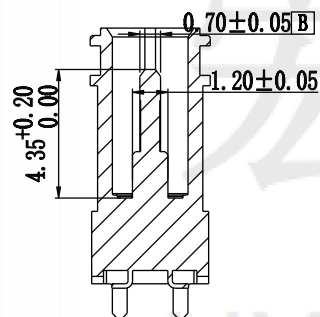

截面A-A

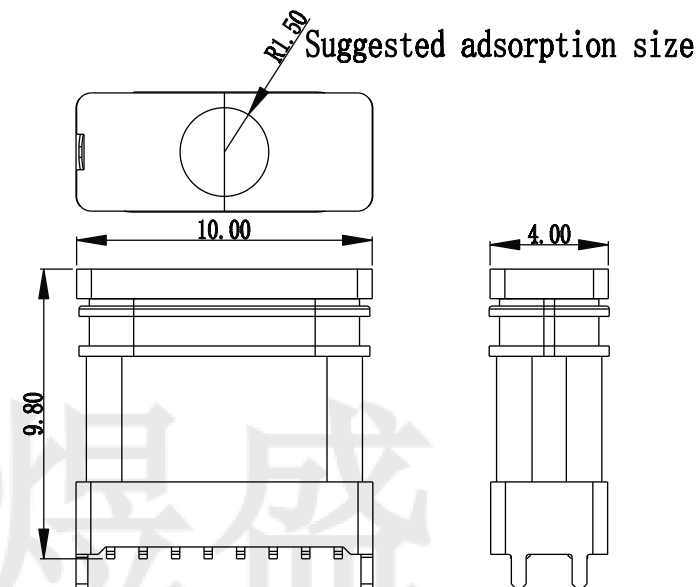

Install suction cap diagram

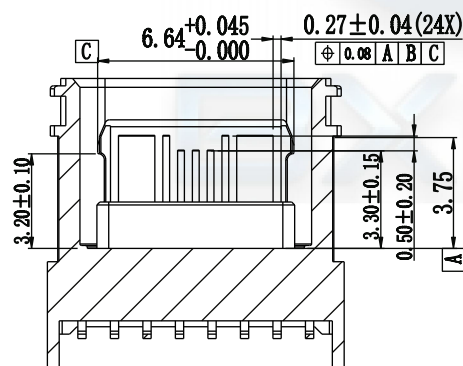


截面B-B

USB TYPE-C PIN ASSIGNMENTS


PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	TXp1	B11	RXp1
A3	TXn1	B10	RXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	RXn2	B3	TXn2
A11	RXp2	B2	TXp2
A12	GND	B1	GND

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ± 0.30 X. $^{\circ} \pm 2^{\circ}$.XX ± 0.20 .X. $^{\circ} \pm 1^{\circ}$.XXX ± 0.10 .XX. $^{\circ} \pm 0.5^{\circ}$	DRAWG NO.	 广东宏煜盛电子科技有限公司 Guangdong Hongyusheng Electronic Technology Co., Ltd. TEL: 0752-6632356 https://www.hystypec.com
DRAWING	Wu Qifa	UNIT	mm		U5400-16PN8.8LF	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:	
APPROVAL	Liu Xiaohong	DATE	2020-06-10		防水16P 直立四脚插板SMT 式粉末冶金外壳双圈 8.8L IPX7	


ROHS
Compatible

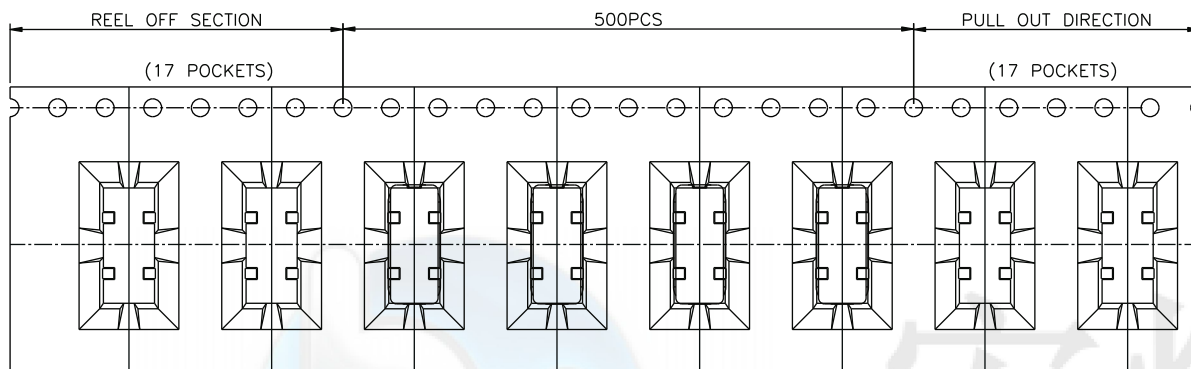


① 产品入载带示意图

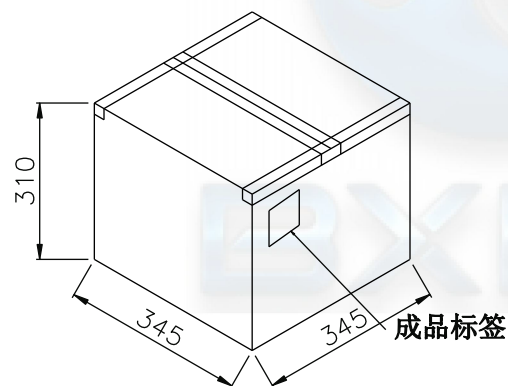


⑤ 外箱封箱示意图

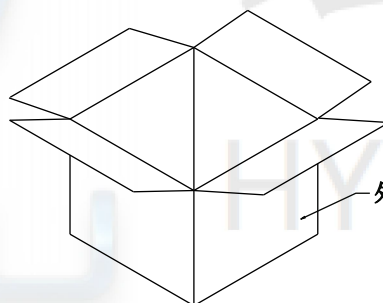

④ 产品入外箱示意图



③ 7盘产品叠层示意图



② 卷盘贴标签示意图

包装说明:

1. 将检验好的成品;对插口朝前放入载带;每卷装500PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每7盘叠;具体如图三所示
5. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
(产品包装的标签,如客户有要求,请按客户要求包装出货)
6. 载带前面留17PCS空格,后面留17PCS空格
7. COVER与CARRY剥离力:50-125g,速度:300mm/分钟左右,剥离角度:165° -180°

CONNECTOR (PCS)	REEL	CARTON
	500	3500

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.

U5400-16PN8.8LF

TITLE:

防水16P 直立四脚插板SMT 式粉末冶金外壳双圈 8.8L IPX7



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>