





ROHS
Compatible





NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

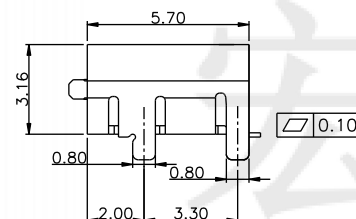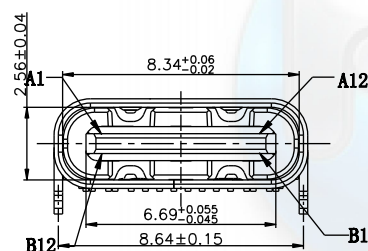

U5 453- 16P x x x 5.7L
名称 流水号 PIN位 N;母座 W;舌头外露 T;带弹 L;长度

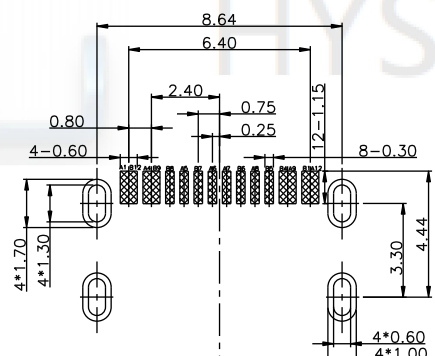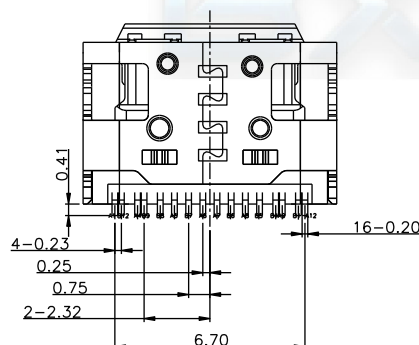

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

Product Blue

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

4	SHELL	SUS304	NI Plated	1PCS
3	SHIELDING PLATE	SUS301	---	1PCS
2	CONTACT	C2680	Au/Ni Plated	1SET
1	HOUSING	LCPE130i	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

DESIGN	Li Jinwei	SCALL			DRAWG NO. U5453-16PNWT5.7L TITLE: 16P 板上四脚插板SMT 舌头外露 带弹 5.7L
DRAWING	Wu Qifa	UNIT	mm		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		
APPROVAL	Liu Xiaohong	DATE	2020-06-10		
				TOLERANCE	
				X.X ±0.30	X.°±2°
				.XX ±0.20	.X° ±1°
				.XXX ±0.10	.XX°±0.5°





广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>






ROHS
Compatible

产品收料方向

产品出料方向

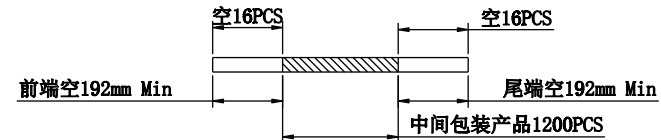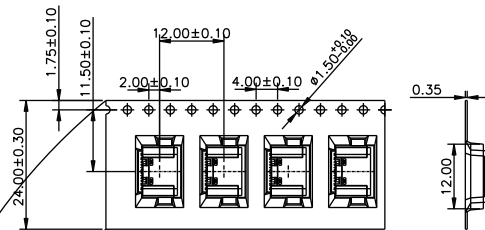

载带出料方向

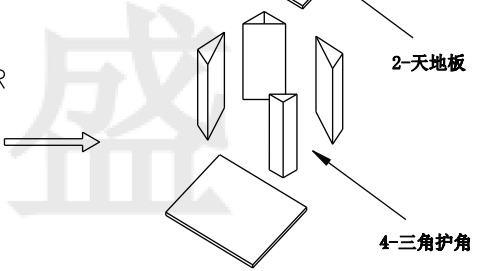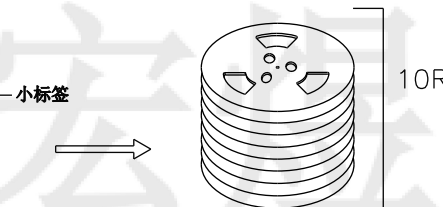

CARTON
350*340*310

NOTE:

1. QUANTITY/REEL: 1200 PCS
数量/卷: 1200 PCS
QUANTITY/INNER CARTON: 1200 X 10 = 12000 PCS
数量/箱: 1200 X 10 = 12000 PCS
2. FREE 16 CAVE IN THE FRONT CARRIER AND FREE 16 CAVE IN THE END CARRIER.
包装带内圈空16格, 外圈空16格.

DESIGN	Li Jinwei	SCALL			DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE	U5453-16PNWT5.7L
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ±0.30 X.° ±2°	TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ±0.20 .X° ±1°	16P 板上四脚插板SMT 舌头外露 带弹 5.7L
				.XXX ±0.10 .XX° ±0.5°	

广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL: 0752-6632356 <https://www.hystypec.com>