
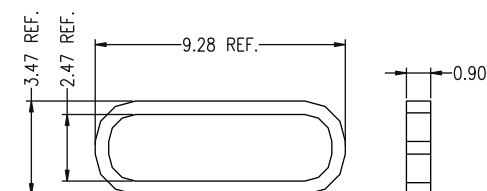

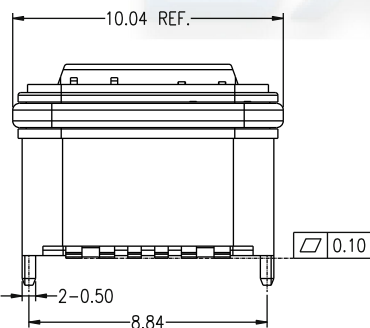





ROHS

Compatible

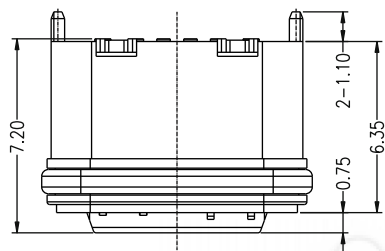

建议的胶圈尺寸

Note:

1. Material:

1.1 Housing: LCP BLACK,UL94 V-0.

1.2 Contact:C7025,t=0.20mm

1.3 Shell: SUS316

2.ELECTRICAL:

2-1:CURRENT RATAING:

VBUS AND GND CONTACTS RATED AT 1.25A
PARALLELED FOR A TOTAL OF 5A;

2-2:INITIAL CONTACT RESISTANCE :40 MEGOHMS

2-3:DIELECTRIC WITHSTANDING VOLTAGE:

100V AC MIN;

3:MECHANICAL CHARACTERISTICS:

3-1:MATING FORCE:5~20N

3-2: UNMATING FORCE: 8~20N (INITIAL),


3-3:FREQUENCY: 200±50 CYCLES /HOUR,10000 CYCLES
3-4:OPERATING TEMPERATURE ; -40°~80°.

4. Water Resistance: IPX7


U5	012-	06P	x	x	7.2L	x
↓	↓	↓	↓	↓	↓	↓
名称	流水号	PIN位	N;母座	W;舌头外露	L;长度	F;防水

DESIGN	Li Jinwei	SCALL			DRAWG NO.	 广东宏煜盛电子科技有限公司 Guangdong Hongyusheng Electronic Technology Co., Ltd TEL:0752-6632356 https://www.hystypec.com	
DRAWING	Wu Qifa	UNIT	mm		TOLERANCE		U5012-06PNW7.2LF
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		X.X ±0.30 X.°±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX°±0.5°		TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10				防水6P 立贴四脚插板SMT 舌头外露 7.2L IPX7


ROHS
Compatible

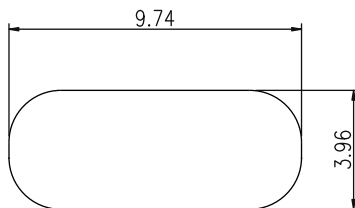



Suggested adsorption size

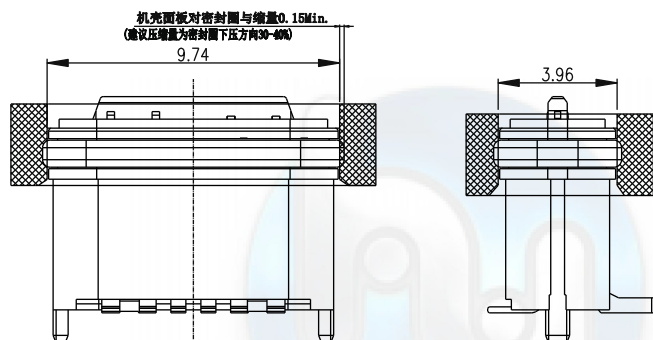

密封开孔参考尺寸(只供参考), 组装外壳时需要打环保润滑油

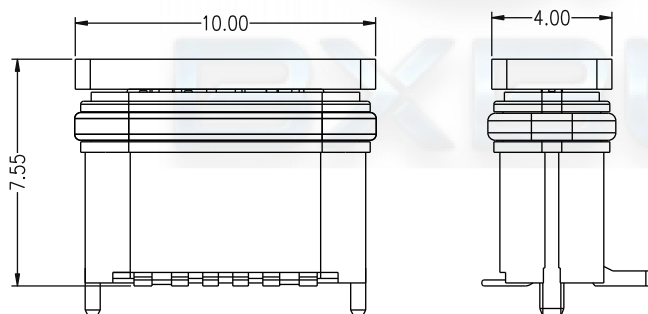

Added suction cover view

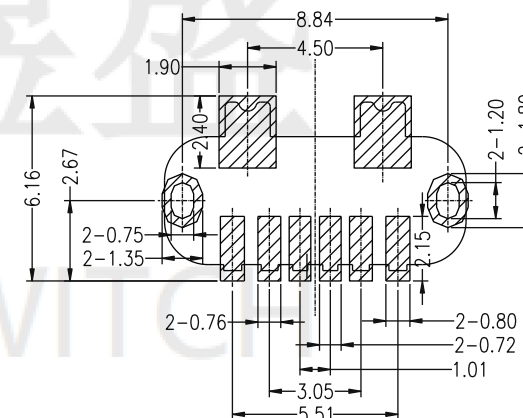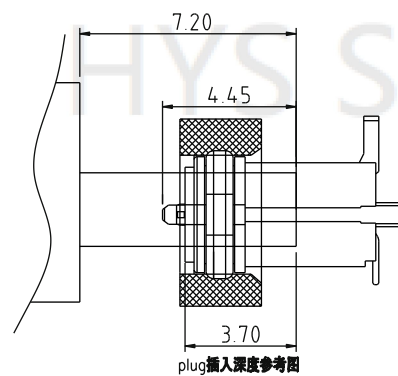

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10


TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	U5012-06PNW7.2LF
TITLE:	防水6P 立贴四脚插板SMT 舌头外露 7.2L IPX7




广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL: 0752-6632356 <https://www.hystypec.com>


ROHS
Compatible

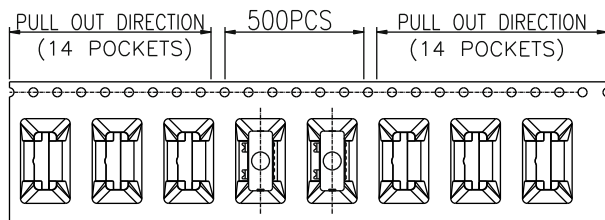


① 产品入载带示意图




② 卷盘贴标签示意图



③ 11盘产品叠层示意图

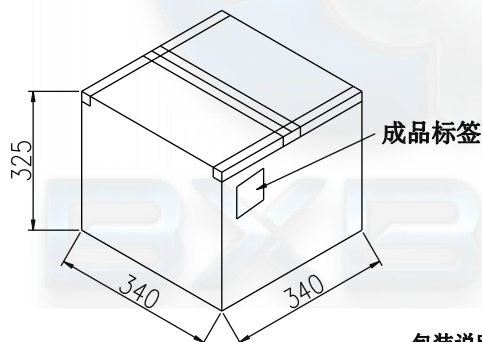

⑤ 外箱封箱示意图

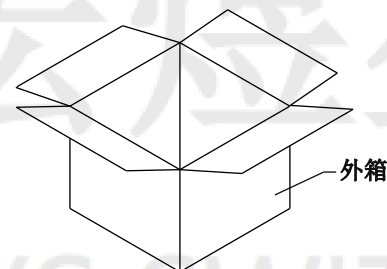

④ 产品入外箱示意图

包装说明:

1. 将检验好的成品;SMT朝下放入载带底部;每卷装500PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每11盘叠;具体如图三所示
4. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
(产品包装的标签,如客户有要求,请按客户要求包装出货)
5. 载带前面留14PCS空格,后面留14PCS空格
6. COVER与CARRY剥离力:50-125g,速度:300mm/分钟左右,
剥离角度:165°-180°

CONNECTOR (PCS)	REEL	CARTON
	500	5500

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	U5012-06PNW7.2LF
TITLE:	防水6P 立贴四脚插板SMT 舌头外露 7.2L IPX7



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>