
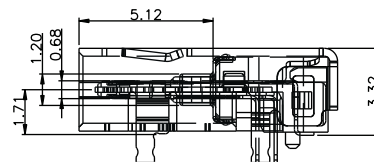


ROHS

Compatible







NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

U5	133-	24P	x	x	9.87L
↓	↓	↓	↓	↓	↓
名称	流水号	PIN位	N:母座	T:带弹	L:长度

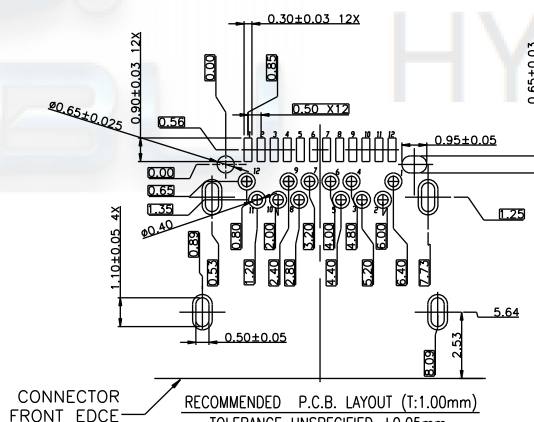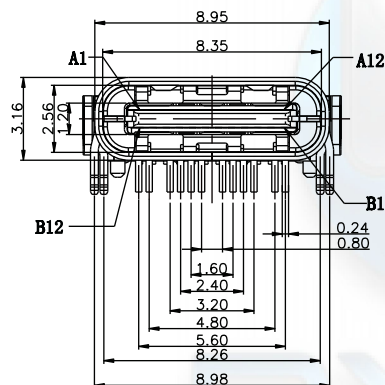


A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME


5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SPRING	STAINLESS STEEL	---	1PCS
3	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
2	CONTACT	COPPER ALLOY	Au1u"/NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.	 广东宏煜盛电子科技有限公司 Guangdong Hongyusheng Electronic Technology Co., Ltd TEL:0752-6632356 https://www.hystypec.com
DRAWING	Wu Qifa	UNIT	mm		U5133-24PNT9.87L	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:	
APPROVAL	Liu Xiaohong	DATE	2020-06-10		24P 板上四脚插板DIP + SMT 带弹 9.87L	

ROHS
Compatible

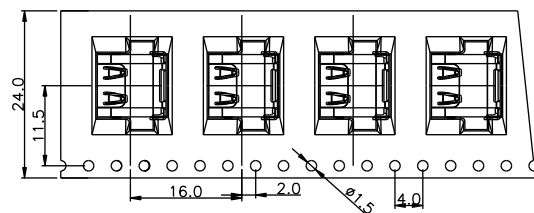


① 产品入载带示意图

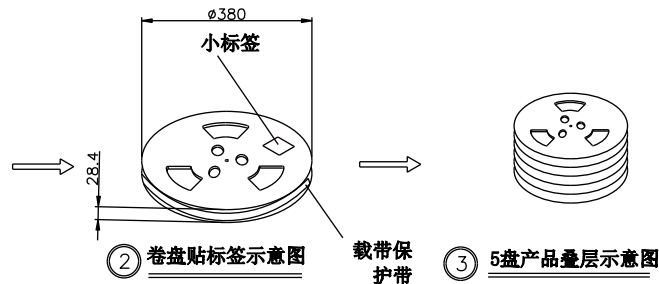


② 卷盘贴标签示意图

③ 5盘产品叠层示意图



④ 产品入外箱示意图

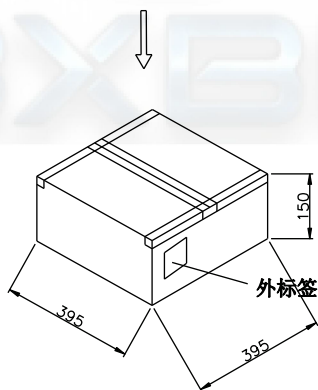

⑤ 外箱封箱示意图

NOTE:

1. QUANTITY/REEL: 1000 PCS

数量/卷: 1000 PCS

QUANTITY/INNER CARTON: 1000 X 5 = 5000 PCS

数量/箱: 1000 X 5 = 5000 PCS

2. FREE 20 CAVE IN THE FRONT CARRIER ADN FREE 20 CAVE IN THE END CARRIER.

包装带内圈空16格, 外圈空16格.

1	成品		C TYPE母座成品	5000
2	CARRIER TAPE	PET	W=24mm T=0.30mm	16.5M
3	COVER TAPE	PET	W=13.3mm T=0.05mm	16.5M
4	小标签		L102mm*W59mm	5
5	卷盘	PS	380mm*H28.4mm	5
7	外标签		L102mm*W102mm	1
9	外箱	A=A	L395mm*W395mm*H150mm	1
ITEM	DESC.	MATERIAL	REMARKS	QTY

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

ϕ	$\pm$
TOLERANCE	
X.X	± 0.30 X. $^{\circ} \pm 2^{\circ}$
.XX	± 0.20 .X. $^{\circ} \pm 1^{\circ}$
.XXX	± 0.10 .XX. $^{\circ} \pm 0.5^{\circ}$

DRAWG NO.

U5133-24PNT9.87L

TITLE:

24P 板上四脚插板DIP + SMT 带弹 9.87L



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL: 0752-6632356 <https://www.hystypec.com>