
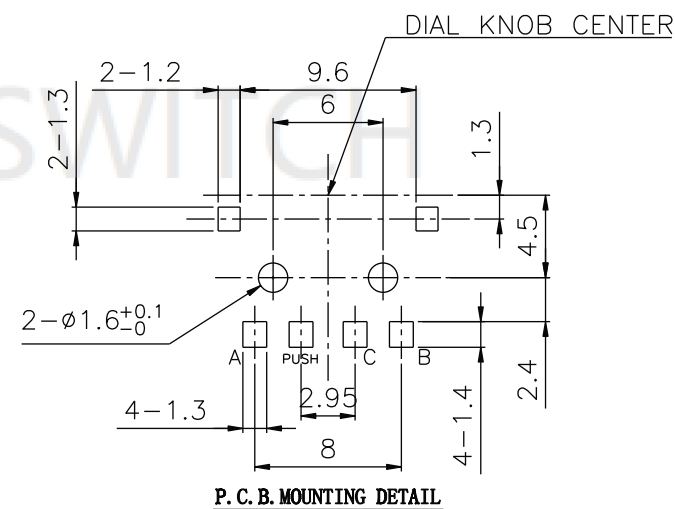

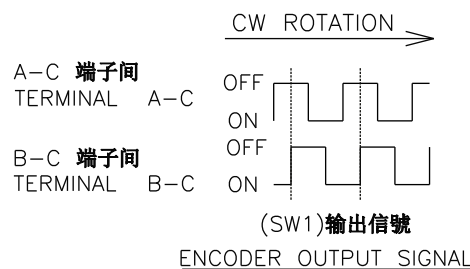
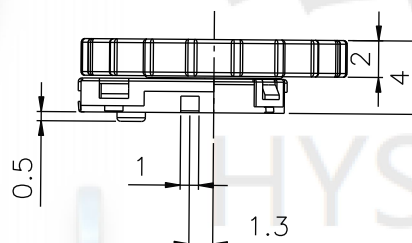

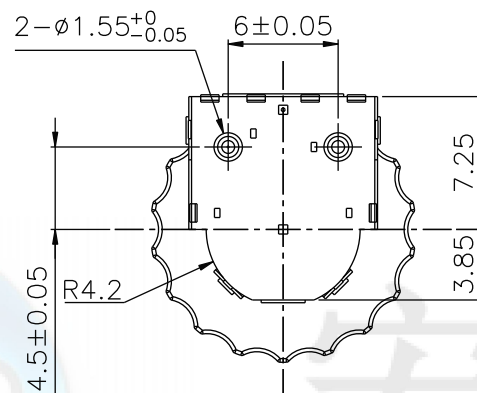


ROHS
Compatible

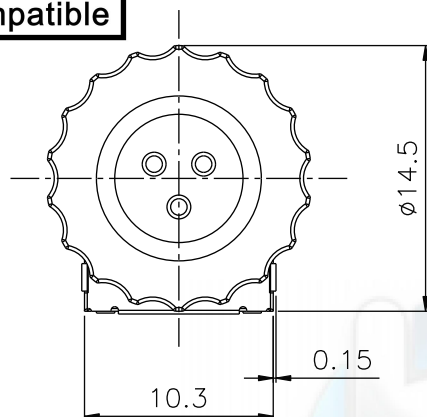

- 一、ELECTRICAL CHARACTERISTICS 电气特性
- Pulse 脉冲数:15脉冲
- Output Signal Format 输出信号:A领先B
- Phase-Difference 相位差:大于3ms
- Sliding Noise 滑动噪声:小于2ms
- Fluttering (Contact) 接触弹跳噪声:小于3ms
- 二、MECHANICAL CHARACTERISTICS 机械特性
- Total Rotational Angle 全回转角度:360°
- Number and Position of Detents 定位点数:15
- Detent Torque 定位脱出力:20-60gf.cm
- 三、ENDURANCE CHARACTERISTICS 耐久性能
- Rotational life 旋转寿命:50,000 cycles Min
- 四、SWITCH CHARACTERISTICS 开关规格
- Switch Travel 开关移动量: 0.5 ± 0.3 mm
- Switch Action 开关作用力: 500 ± 200 gf.cm
- Number of Cycles 开关耐久次数: 50,000 cycles Min

DESIGN	Li Jinwei	SCALL			DRAWG NO.	 广东宏煜盛电子科技有限公司 Guangdong Hongyusheng Electronic Technology Co., Ltd TEL:0752-6632356 https://www.hystypec.com	
DRAWING	Wu Qifa	UNIT	mm		TOLERANCE		HYSSIQ-02FVS3
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		X.X ±0.30 X.°±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX°±0.5°		TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10				编码器