
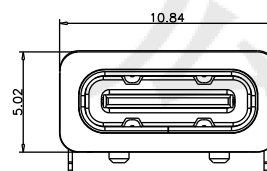







ROHS
Compatible





加防水圈示意图

NOTES:

SPECIFICATION:

- 1.CURRENT RATING: 3.0A MAX
- 2.VOLTAGE: 100 VAC
- 3.TEMPERATURE RANGE: -30°C~+85°C
- 4.CONTACT RESISTANCE: 40 MILLION HM MAX
- 5.INSULATION RESISTANCE: 100 MEG OHMS MIN
- 6.INSERTION FORCE: 5N~20N
- 7.UNMATING FORCE: 8N~20N
- 8.DURABILITY: 10000 CYCLES
- 9.WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX8.

U5 008- 06P x 2.0V 7.7L x
↓ ↓ ↓ ↓ ↓ ↓ ↓
名称 流水号 PIN位 N;母座 V;外露 L;长度 F;防水

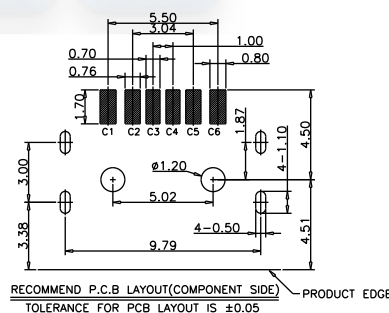

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
SIGNAL NAME					CC1							
PIN NUMBER	B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
SIGNAL NAME	GND			Vbus				CC2				

TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	STAINLESS STEEL,NI PLATED
2	CONTACT	6	COPPER STEEL,TIN/Au/NI PLATED
3	MID PLATE	1	STAINLESS STEEL,NO PLATING
4	1MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
5	2MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
6	SHIELDING PLATE	1	STAINLESS STEEL,NI PLATED

DESIGN	Li Jinwei	SCALL			DRAWG NO.	U5008-06PN2.0V7.7LF	
DRAWING	Wu Qifa	UNIT	mm		TOLERANCE		TITLE:
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		X.X ±0.30 X.°±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX°±0.5°		防水6P 板上四脚插板SMT 中柱 外露2.0mm 7.7L
APPROVAL	Liu Xiaohong	DATE	2020-06-10				



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd

TEL:0752-6632356 <https://www.hystypec.com>






广东宏煜盛电子科技有限公司


Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>


ROHS
Compatible

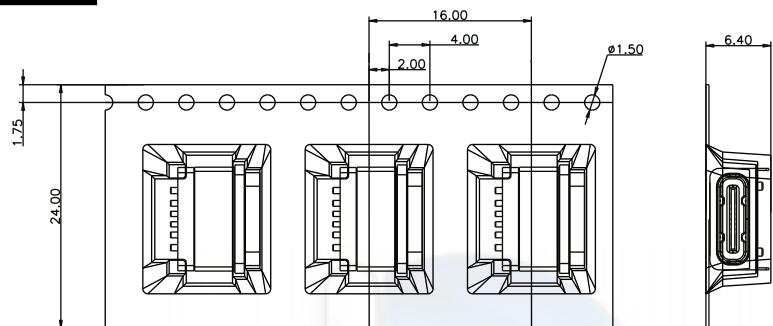


① 产品入载带示意图

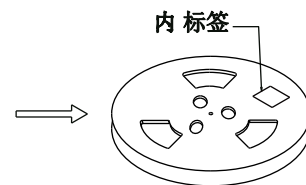


② 卷盘贴标签示意图

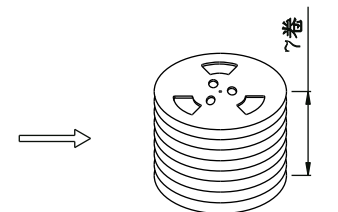

③ 7盘产品叠层示意图

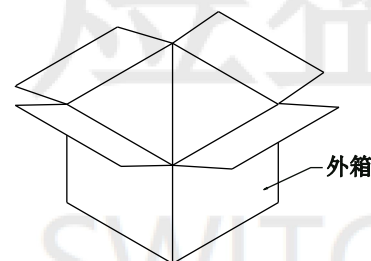

④ 产品入外箱示意图

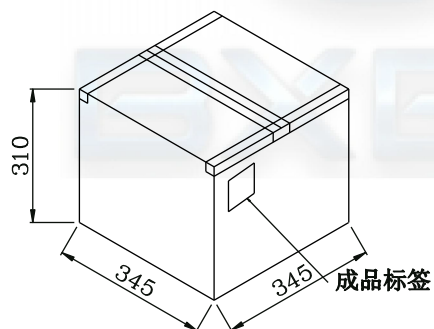

⑤ 外箱封箱示意图

包装说明:

1. 将检验好的成品;对插口朝前放入载带;每卷装700PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每7盘叠;具体如图三所示
5. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
(产品包装的标签,如客户有要求,请按客户要求包装出货)
6. 载带前面留16PCS空格,后面留16PCS空格
7. COVER与CARRY剥离力:50-125g,速度:300mm/分钟左右,
剥离角度:165°-180°

CONNECTOR (PCS)	REEL	CARTON
	700	4900

DESIGN	Li Jinwei	SCALL			DRAWG NO.	 广东宏煜盛电子科技有限公司 Guangdong Hongyusheng Electronic Technology Co., Ltd. TEL:0752-6632356 https://www.hystypec.com	
DRAWING	Wu Qifa	UNIT	mm		TOLERANCE		U5008-06PN2.0V7.7LF
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5°		TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10				防水6P 板上四脚插板SMT 中柱 外露2.0mm 7.7L



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>