
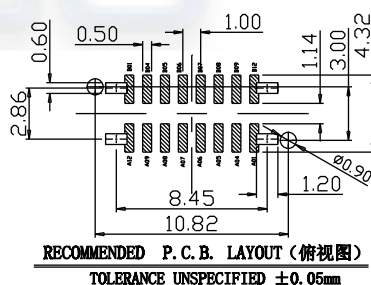



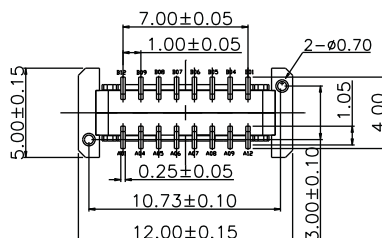


ROHS
Compatible



备注:

1.材质:

1.1胶芯: LCP+30%G.F UL94V-0

1.2端子: C7025 : 镀底50U" MIN

接触区域镀金 (AU 1u") 焊接区域镀金G/F

1.3外壳: SUS304, T=0.30mm : 表面镀镍30U" MIN

1.4中夹片: SUS301:

2.主要特性:

2.1额定电流: 5A

2.2接触阻抗: 40mΩ MAX (初始值)

50mΩ MAX (测试后)

2.3绝缘阻抗: 100MΩ MIN

2.4耐压测试: 100V AC R M S

2.5整体插入力: 5-20N 整体插入力: 5-20N (耐久后)

整体拔出: 8-20N 整体拔出: 6-20N (耐久后)

2.6耐久: 10000次



2.7耐高温: SMT回流焊 (峰值260°±5°), 塑胶不能有起泡, 融胶等不良, 变色, 翘曲变形在公差范围以内。

2.8产品须做焊锡测试, 粘锡面积达到95%以上:

2.9盐雾测试: 24H MIN

3.0工作温度: -25°C ~ +80°C

U5 106- 16P x 11.0L
↓ ↓ ↓ ↓ ↓
名称 流水号 PIN位 N;母座 L;长度



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

DESIGN	Li Jinwei	SCALL			DRAWG NO. U5106-16PN11.0L
DRAWING	Wu Qifa	UNIT	mm		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		
APPROVAL	Liu Xiaohong	DATE	2020-06-10		
				TOLERANCE	
				X.X ±0.30	X.°±2°
				.XX ±0.20	.X° ±1°
				.XXX ±0.10	.XX°±0.5°

16P 立式四脚插板SMT 带斜柱 11.0L

广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL: 0752-6632356 <https://www.hystypec.com>