
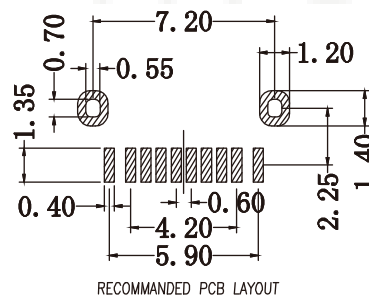
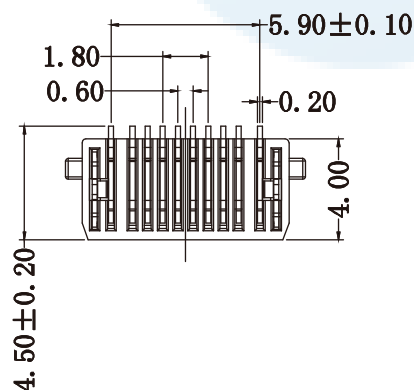
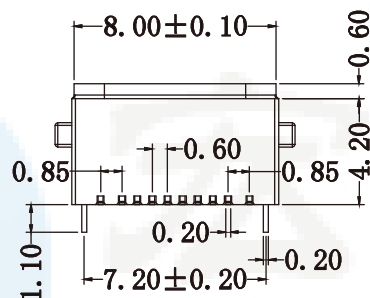
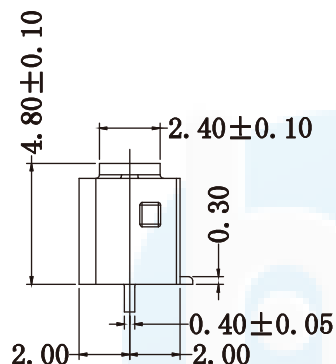



ROHS
Compatible



RECOMMENDED PCB LAYOUT

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectric Withstanding Voitage:
500 V AC AT Sea Levot
5. 绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
2. 端子保持力: Terminal Retenion
1.2kgf (MIN)

原材料:Matorial:

1. 塑胶:Housing:
Hing Temperature Thermaplastics,
Ul 94V-0 LCP White/Black
2. 端子>Contact:Copper Alloy C5191
3. 卡钩:Shell: Copper Alloy SUS301

电镀:Finish:

1. 端子>Contact: Piated Gold in Mating Area;
Tin On Solder Talls
2. 卡钩:Shell:
Nickel Plating

DESIGN	Li Jinwei	SCALL		 TOLERANCE X. X ±0.30 X. XX ±0.20 X. XXX ±0.10 X. * ±0.05 X. x° ±0.02	DRAWG NO.	 东莞市宏煜盛实业有限公司 Dongguan hongyusheng Industry Co., Ltd TEL: 0769-81230179 https://www.hystypec.com
DRAWING	Wu Qifa	UNIT	mm		USB-U-LS10PH48	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:	
APPROVAL	Liu Xiaohong	DATE	2020-06-10		苹果10P立贴母座H=4.8	