

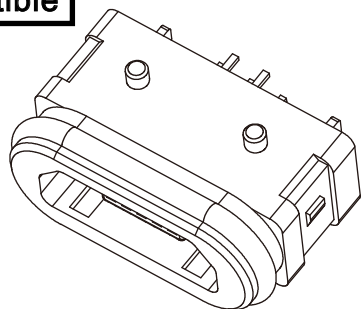




ROHS
Compatible

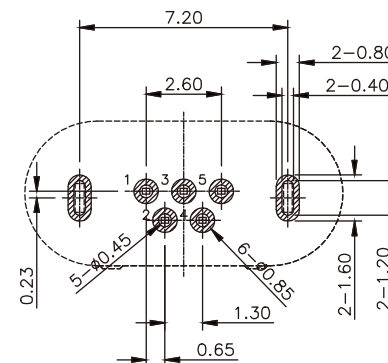


3D VIEW

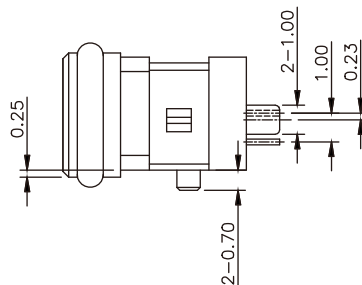

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ± 0.05

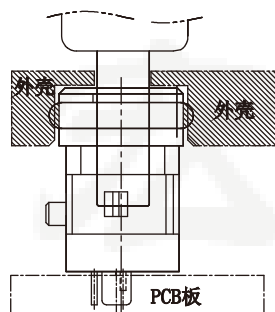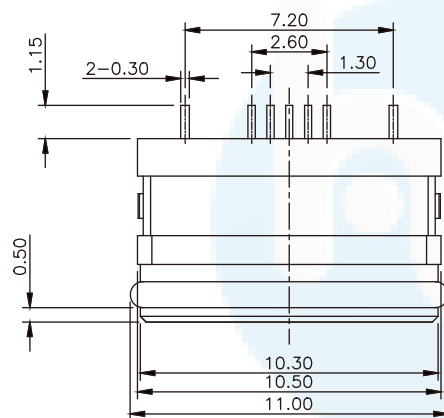

组装示意图

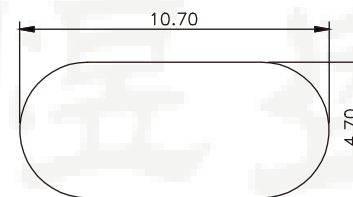



开孔尺寸参考

组装外壳时需要打环保润滑油

Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Gound
5#	GND	Gound

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - RATING: 1.5A
 - CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
 - DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - INSULATION RESISTANCE: 1000MΩ MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- INSERTION FORCE: 3.5Kgf (35N) Max.;
- EXTRACTION FORCE: 0.8Kgf (8N) Min.;
- WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX8
- PLUG INTERFACE DIMENSIONS COMFORM TO USB2.0 SPEC.
- PACKAGING: TAPE & REEL.

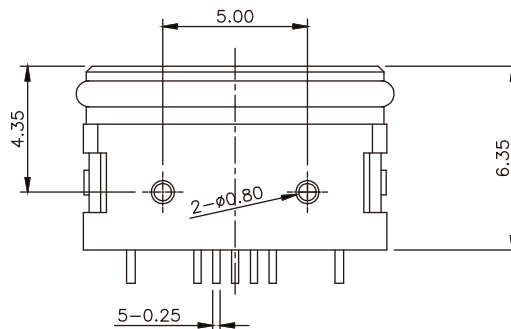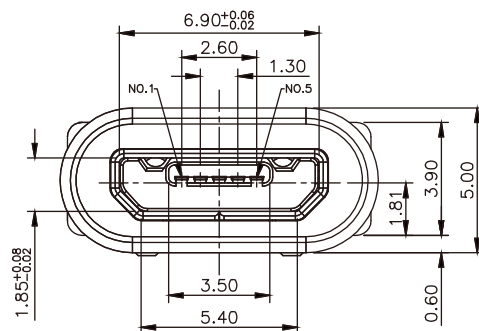

⑤	Oval ring	1	硅橡胶	Black
④	Inner shell	1	SUS304	Nickel plated
③	Terminal	5	C5191, 0.15t	Gold Plated On Contact Area.
②	Outer shell	1	PA9T	Black
①	Body	1	LCP	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X. ± 0.50	X. $\pm 2^\circ$
.X ± 0.30	.X $\pm 1^\circ$
.XX ± 0.10	.XX $\pm 0.5^\circ$

DRAWG NO.

USB-M-LD68FZ

TITLE:

立式插脚 IPX8带防水胶圈



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>