
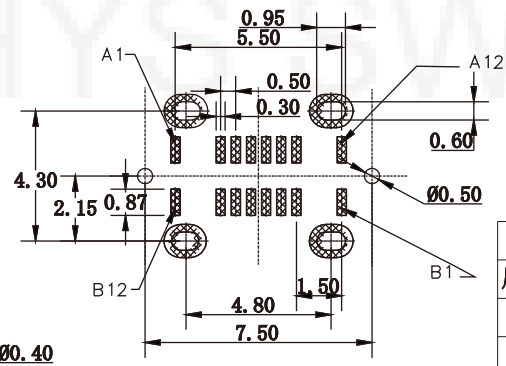







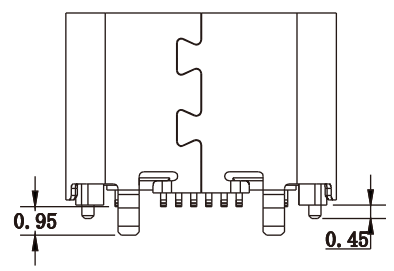



ROHS
Compatible

1
2
3
4

1
2
3
4



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- NOTES:
- MECHANICAL: MATING FORCE: 5-20N .
UNMATING FORCE: 8-20N .
DURABILITY: 10000 CYCLES MIN.
 - ELECTRICAL:
CURRENT: 5.0A MAX
VOLTAGE: 20V MAX
WITHSTANDING VOLTAGE: 300V AC
CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
50 mΩ MAX AFTER 10000 CYCLES
 - ENVIRONMENTAL:
OPERATING TEMPERATURE RANGE -30° C ~ +80° C
 - Salt Spray: 24H

BOM		
序号	名称	材料规格
1	Terminal	C7025 TM02 T=0.15mm 电镀全 Au:GF Ni:50u"
2	Terminal	C7025 TM02 T=0.15mm 电镀金 Au:GF Ni:50u"
3	Molding 1	LCP+30%G.F黑色 UL94 V-0
4	Molding 2	LCP+30%G.F黑色 UL94 V-0
5	H00K	SUS201 1/2 T=0.15
6	Shell	SUS304 1/2H T=0.30mm Ni:50u"

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

DRAWG NO.	TYPE-C-LDS16PZ64
TITLE:	16P 立式贴片 6.4H 脚长0.95

 **东莞市宏煜盛实业有限公司**
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>

F E D C B A