


ROHS
Compatible

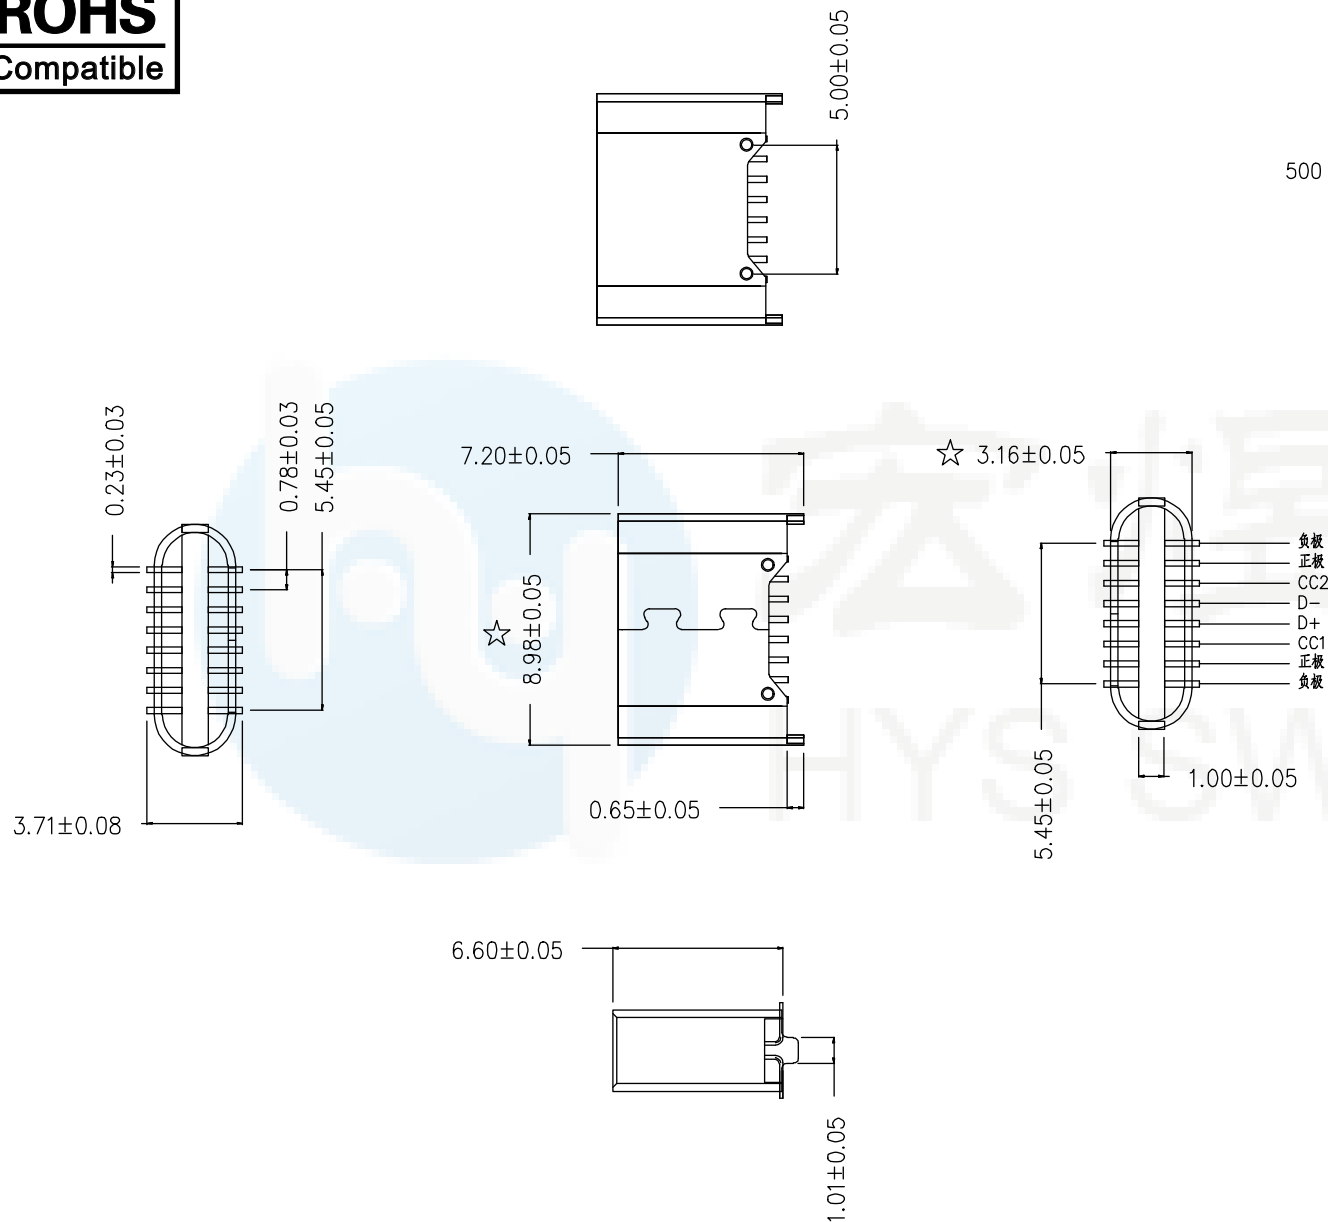

电器特性: (Electrical characteristics)

1. 接触阻抗: (Contact Resistance)

最大值30毫欧: (30 milliohms MAX)

2. 耐电压: (Dielectric Withstanding Voltage:)

500 伏特交流电 (500V AC AT Sea Level)

3. 绝缘阻抗: (Insulation Resistance:)

最小值1000兆欧姆 (1000 mega-ohms MIN)

机械性能: (Mechanical:)

1. 插入力: (Insertion Force)

最大20N (20N MAX)

2. 拔出力: (Unmating Force:)

8-20N, 5000次后6-20N

材料: Material:

1. 塑胶: (Housing): High Temperature Inertplastics,

■ LCP 黑胶

2. 端子: (Contact): C5191 ■

3. Type-c 外壳: (Shell): SUS201 ■

4. 卡钩: (Shell): SUS201 ■

电镀: (Finish):

1. 端子: (Contact): Plated Gold in Mating Area:

Tin On Solder Tails

接触: ■ 金足1u", 脚镀锡。

2. 外壳: (Shell): Nickel Plating 镀亮镍

注明: 1. 标示 " " 为PQG重点检测尺寸。

2. 品不能有 形、模痕。

3. 品毛 0.03mmMax。

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

DRAWG NO.

TYPE-C-LS16P660

TITLE:

16P 立式贴片 6.6H



东莞市宏煜盛实业有限公司

Dongguan hongyusheng Industry Co., Ltd

TEL: 0769-81230179 <https://www.hystypec.com>