
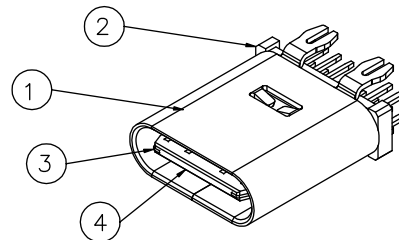






ROHS
Compatible

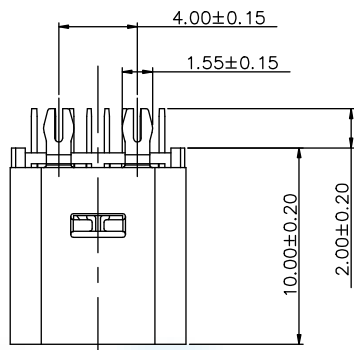

NOTE :
UT03FD014SX04ZA

1. Seletive Plating
S1: 5u" Gold In Contact Area
100u" Tin In Tail Area
S2: 0.8u" Gold In Contact Area
100u" Tin In Tail Area
S3: 10u" Gold In Contact Area
100u" Tin In Tail Area
S4: 15u" Gold In Contact Area
100u" Tin In Tail Area
S5: 30u" Gold In Contact Area
100u" Tin In Tail Area

- SPECIFICATION:
1. CURRENT RATING: 5.0A MAX
2. Withstanding Voltage: 100V AC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N (1~1000次)
6N~20N (10000次之后)
8. DURABILITY: 10,000 CYCLES

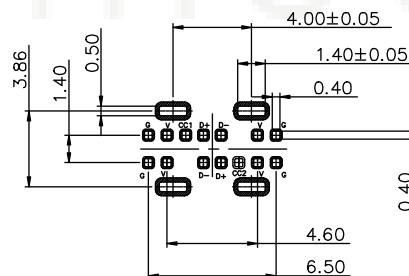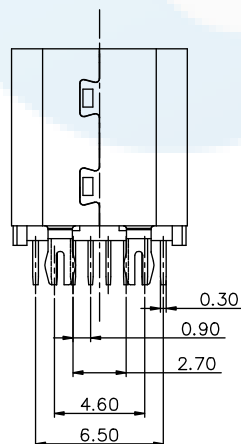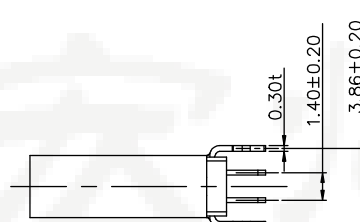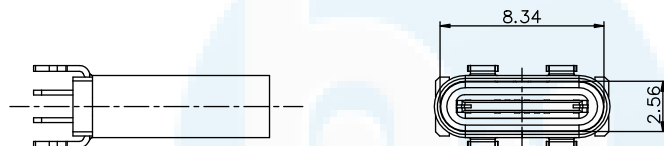

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

4	TYPE C MD	HIGH TEMP	BLACK	UL 94V-0
3	CENTER PIECE	STAINLESS STEEL	—	NO Plated
2	TYPE C TERMINAL	COPPER ALLOY	—	Gold Plated
1	SHELL	STAINLESS STEEL	—	Ni Plated
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.° ±2°
.XX ±0.20	.X° ±1°
.XXX ±0.10	.XX° ±0.5°

DRAWG NO.	TYPE-C-LDV14P100
TITLE:	14P立式直插180度鱼叉脚10.0H

 **东莞市宏煜盛实业有限公司**
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>