

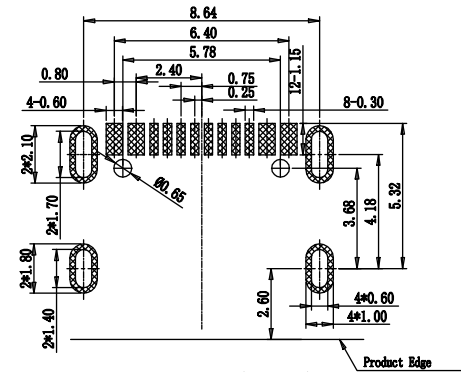




ROHS
Compatible

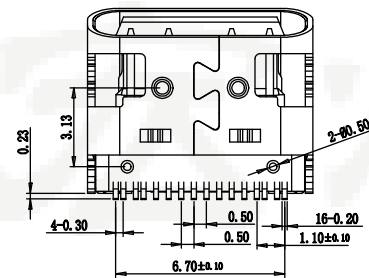

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm



NOTES:

1.MATERIAL:

MOLDING: LCP UL94 V-0

CONTACT: COPPER ALLOY. C1814 T=0.15±0.02mm
GOLD PLATED 1u" Min ON CONTACT AREA,
GOLD PLATED Min ON SOLDER AREA,

SHELL: SUS304-H,T=0.30±0.02mm
50u" NICKEL PLATING OVER ALL.

Card hook: SUS301-H,T=0.20±0.02mm

2.MECHANICAL:

INSERTION: 5~20N.

EXTRACTION: 8~20N.

DURABILITY: 5000 CYCLES

3.ELECTRICAL:

CURRENT: 5A MIN FOR VBUS;
0.25A MIN FOR OTHER.

VOLTAGE: 5VAC MAX





WITHSTANDING VOLTAGE: 100V AC.

CONTACT RESISTANCE: 40mΩ MAX.

INSULATION RESISTANCE: 100MΩ MIN.

4.ENVIRONMENTAL

TEMPERATURE RANGE -55°C ~ +85°C

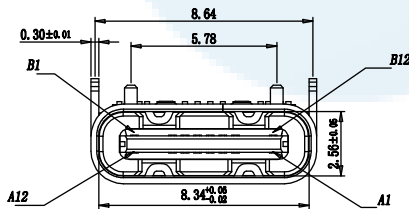

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

⌀	
TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	TYPE-C-DSI16PZ733
TITLE:	16P板上型SMT斜口7.33L


东莞市宏煜盛实业有限公司
 Dongguan hongyusheng Industry Co., Ltd
 TEL: 0769-81230179 <https://www.hystypec.com>