

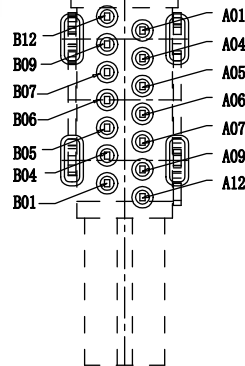
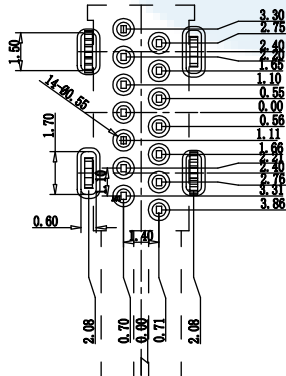
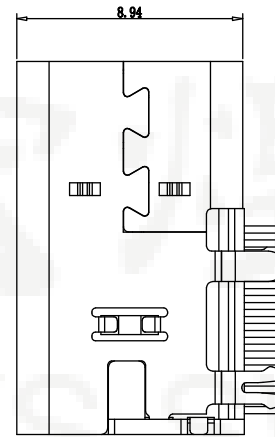
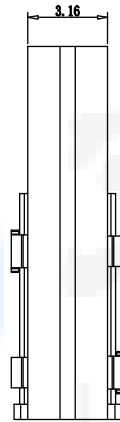
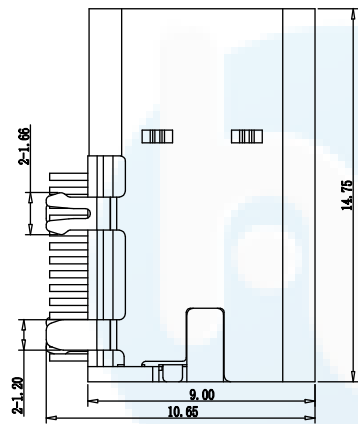
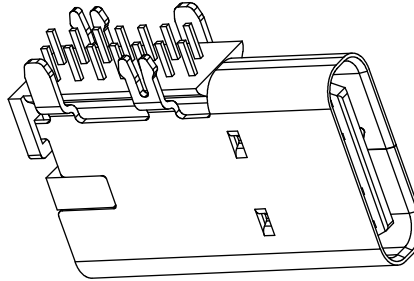


ROHS
Compatible

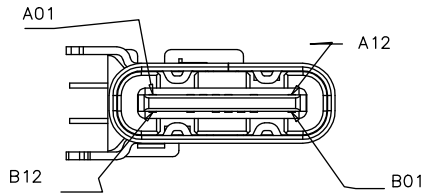

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

产品要求:

1. 壳子: a. 不锈钢201 T: 0.30mm
b. 电镀镍
2. 端子: a. (C1814)/铜 T: 0.20mm
b. 电镀半金锡 (3u")
3. 卡勾: a. 不锈钢301 T: 0.30mm

4. 塑胶: LCP (E130I)

5. MECHANICAL:

INSERTION: 5~20N.
EXTRACTION: 8~20N.
DURABILITY: 10000 CYCLES

6. ELECTRICAL:

CURRENT: 5A MIN FOR VBUS;
0.25A MIN FOR OTHER.
VOLTAGE: 5VAC MAX
WITHSTANDING VOLTAGE: 100V AC.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.

7. ENVIRONMENTAL

8. *号尺寸为点管控尺寸

成品料号 MHCT 1001 $\frac{XX}{1}$ $\frac{XX}{2}$ $\frac{XX}{3}$ $\frac{XX}{4}$

1. 外壳: M1-镀珍珠镍 M2-镀亮镍 M3-镀金1U"
2. 端子: C1-半金锡1u" C3-半金锡3u" C5-半金锡5u"
3. 胶芯: A1-黑色 A2-本色白 A3-瓷白 A4-紫色

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1		
A6	DP1	B7	DN2
A7	DN1	B6	DP2
		B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

4	外壳	不锈钢	镀镍	1PCS
3	端子	高导电铜 (C1814)	半金锡 (3u")	1EST
2	塑胶主体	LCP (E130I)	黑色	1EST
1	卡勾	不锈钢	——	1EST
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

ϕ	
TOLERANCE	
X.X ± 0.30	X.° $\pm 2^\circ$
.XX ± 0.20	.X° $\pm 1^\circ$
.XXX ± 0.10	.XX° $\pm 0.5^\circ$

DRAWG NO.	TYPE-C-YDV14P1475
TITLE:	14P侧插DIP 1.4间距14.75L



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>