
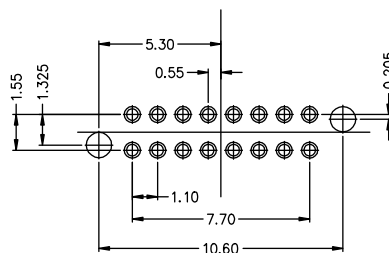
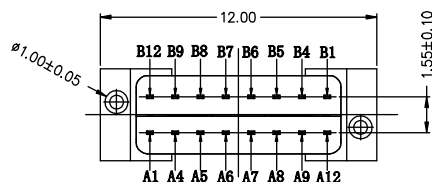
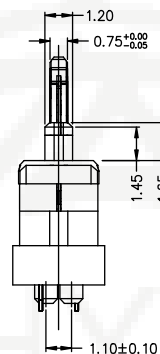
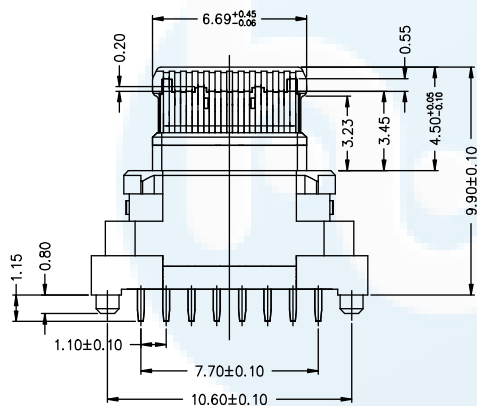



ROHS
Compatible

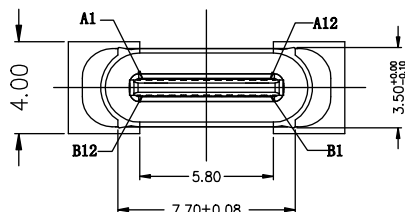

TOP VIEW

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

备注:

1.材质及电镀 见附表1

2.电气性能:

2.1 接触电阻: 30mΩ Max FOR INITIAL.

40mΩ Max AFTER TEST.

2.2 耐电压: 100V AC

2.3 绝缘: 100MΩ Min

2.4 额定电流:

COLLECTIVELY VBUS PIN (A4,A9,B4,B9) ,TOTAL 5A

VCCON PIN (B5) THROUGH GND PIN(A1,A12,B1,B12),1.25A

OTHERS PIN, 0.25A

2.5 工作温度: -30℃ ~ 80℃.

3.机械性能:

3.1 插入力: 5~20N.

3.2 拔出力: 初始值8~20N测试后6~20N

3.3 寿命: 10,000 CYCLES

4.其它

4.1 Pin针不可有压弯、变形现象

4.2 环保要求: 环境物料管理规定

4.3 本产品符合回流焊制程(1次): 260℃±5°, 10秒.

5.满足可焊性: 吃锡面积95%以上

06	二次Molding件	LCP	1	白色 UL94 V-0
05	Molding件2	LCP	1	白色 UL94 V-0
04	Molding件1	LCP	1	白色 UL94 V-0
03	中夹片	SUS301-H T=0.15	1	不电镀
01	端子	C2680-H T=0.15	1set	功能接触区镀镍, 焊脚镀锡
序号	品名	材质	用量	备注

DESIGN	Li Jinwei	SCALL			DRAWG NO. TYPE-C-LDW16PZ990	TITLE: 16P 立式直插全塑舌片外露 9.90H		东莞市宏煜盛实业有限公司 Dongguan hongyusheng Industry Co., Ltd TEL: 0769-81230179 https://www.hystypec.com
DRAWING	Wu Qifa	UNIT	mm					
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297					
APPROVAL	Liu Xiaohong	DATE	2020-06-10					
				TOLERANCE				
				X.X ±0.30	X.° ±2°			
				.XX ±0.20	.X° ±1°			
				.XXX ±0.10	.XX° ±0.5°			