

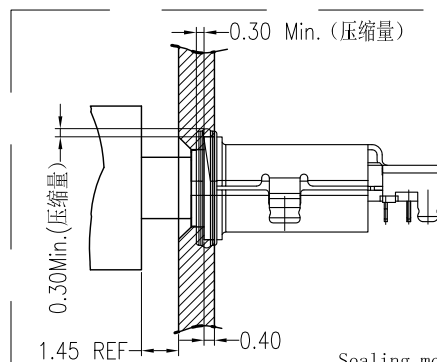
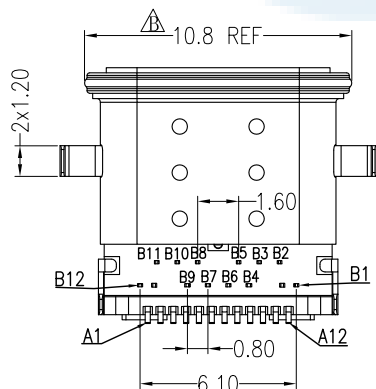

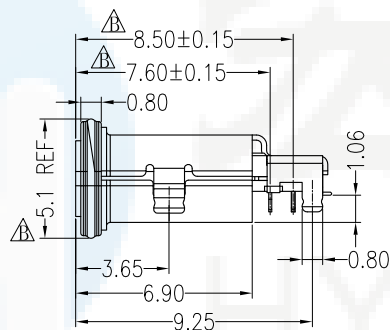
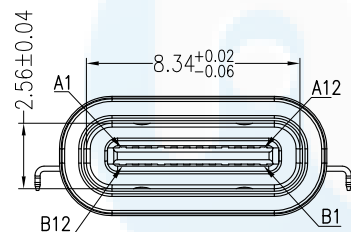

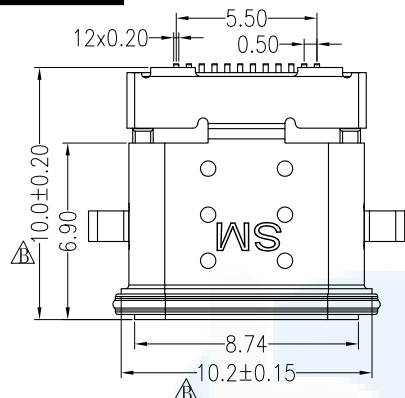


ROHS
Compatible

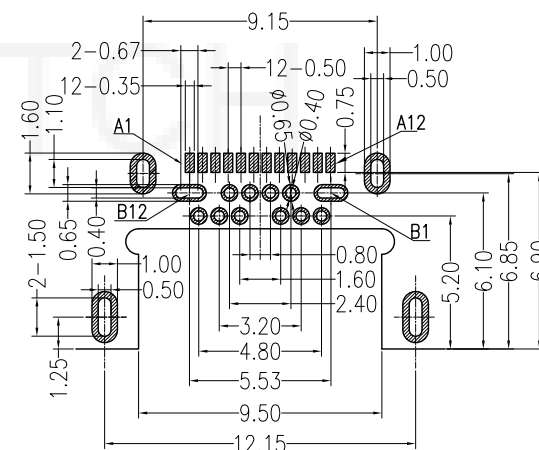

Sealing method(for reference only)

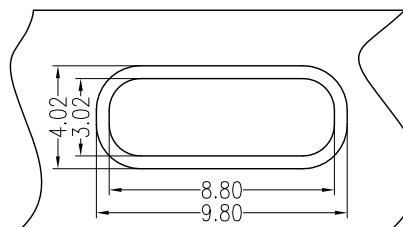

RECOMMEND PCB LAYOUT

- Material/Plated
 - Housing:High temperature thermoplastic,Black UL 94V-0.
 - Terminal:Copper Alloy,Gold Flash Plated At Contact Area, Gold Plated At Solder Area, Nickel Underplated Overall
 - Shell-1:Stainless steel,Nickel plated
 - Shell-2:Stainless steel
 - Ring:Silicon
 - Epoxy:Epoxy,Black
- Electrical Performance
 - Rated Voltage: 30V AC
 - Rated Current: 5.0A Max.
 - Contact Resistance: 30mΩ Max.
 - Insulation Resistance: 100MΩ Min.
 - Dielectric Strength: 100V AC
- Mechanical Performance
 - Insertion Force: 5-20N
 - Withdrawal Force: 8-20N
 - Durability: 10000 Cycles
- Operating Temperature: -25° C To +85° C
- Waterproof: IPX8

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm		TYPE-C-CDS24PF106
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10		防水24P沉板1.06 DIP+SMT IPX8 10.0L



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>