
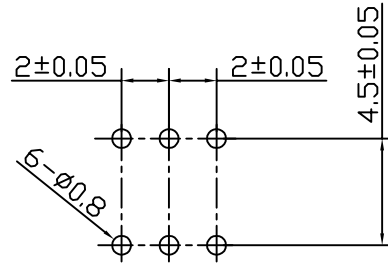
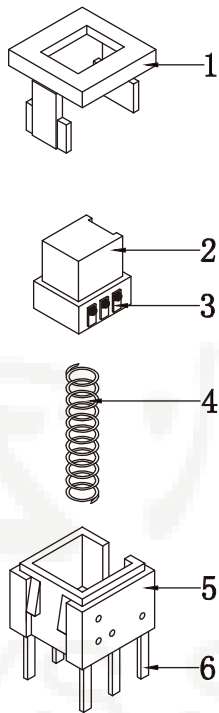


ROHS
Compatible

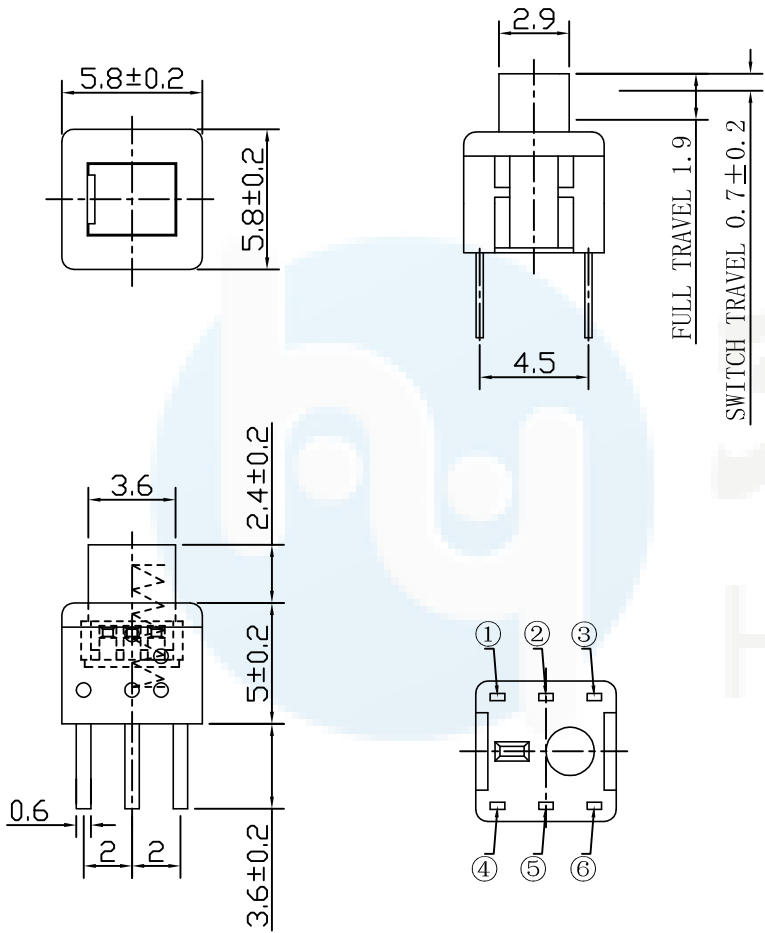

P. C. B LAYOUT

ELECTRICAL CHARACTERISTICS

1. RATING: DC 30V 0.1A
2. CONTACT RESISTANCE: 100m Ω MAX
3. INSULATION RESISTANCE: 100M Ω MIN
4. DIELECTRIC STRENGTH: AC 250V (50~60Hz) /60S

MECHANICAL CHARACTERISTICS

1. PRACTICAL TEMPERATURE RANG: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
2. OPERATING FORCE: $180 \pm 50\text{gf}$ $250 \pm 50\text{gf}$
3. MECHANICAL LIFE: 30,000 cycles

6	TERMINAL	BRASS	6	Ag PLATED
5	CASE	PA66	1	GREY
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PBT	1	WHITE
1	COVER	PPA	1	BLACK
NO.	DESCRIPTION	MATERIAL	QTY	PLATING

DESIGN	Li Jinwei	SCALL			
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ±0.30	X.°±2°
				.XX ±0.20	.X° ±1°
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XXX ±0.10	.XX°±0.5°

DRAWG NO.

PS-5851E-E1

TITLE:

无锁按键开关插件平头



东莞市宏煜盛实业有限公司

Dongguan hongyusheng Industry Co., Ltd

TEL: 0769-81230179 <https://www.hystypec.com>