








ROHS
Compatible

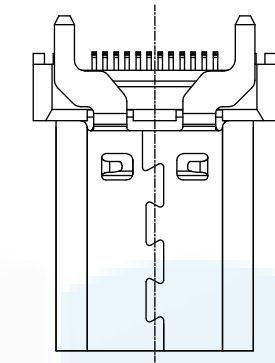

WITHOUT COVER




WITH COVER

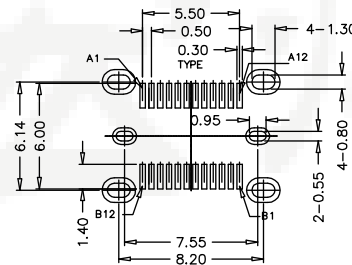

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05
KEEP OUT AREA

1. Contact Resistance: 40mOHM Max.;
2. Dielectric Withstanding Voltage: 100V AC For 1 Minute;
3. Insulation Resistance: 100M OHM Min.;
4. Mating And Unmating Force:
Mating Force: 5~20N
Unmating Force: 8~20N (0~1000cycle);
6~20N (1001~10000cycle);
5. Durability: 10000 Cycles;

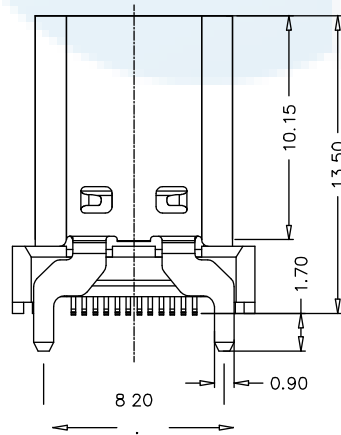

Item	Title	Material	Dispose	Remark
1	Shell	Stainless Steel	Ni:30u" Min.	
2	GND Plate	Stainless Steel		
3	Mid Plate	Stainless Steel	Solder Tails: Matt Tin	
4	Top Contact	Copper Alloy	Mating Area: See P/N	
5	Bottom Contact	Copper Alloy	Solder Tails: Matt Tin	
6	Insulator	High Temperature Plastic	UL 94V-0	Black

DESIGN	Li Jinwei	SCALL		<p>TOLERANCE X.X ± 0.30 X.$^{\circ} \pm 2^{\circ}$.XX ± 0.20 .X.$^{\circ} \pm 1^{\circ}$.XXX ± 0.10 .XX$^{\circ} \pm 0.5^{\circ}$</p>
DRAWING	Wu Qifa	UNIT	mm	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	
APPROVAL	Liu Xiaohong	DATE	2020-06-10	

DRAWG NO.	TYPE-C-LDS24P135
TITLE:	24P立式贴片四脚插板SMT 12.0-13.5-15.0H

东莞市宏煜盛实业有限公司
 Dongguan hongyusheng Industry Co., Ltd
 EL: 0769-81230179 <https://www.hystypec.com>