

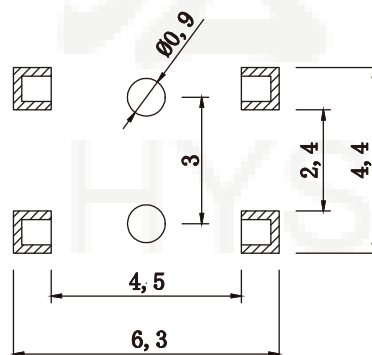

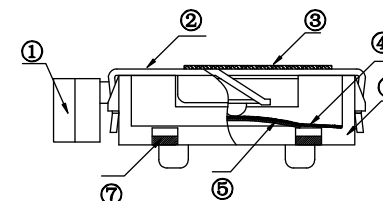
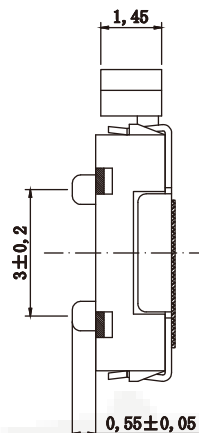


ROHS
Compatible

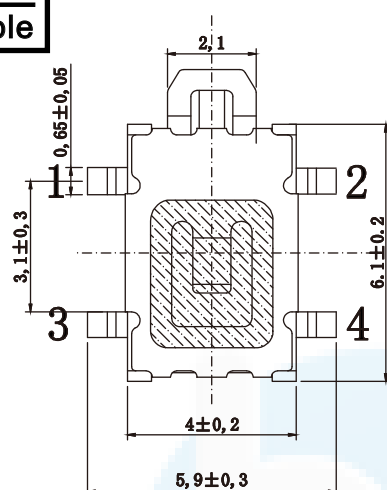

PCB. 焊接图



额定负荷 DC12V 50mA
绝缘强度 DC250V $\geq 100M\Omega$
耐压强度 AC250V 50Hz/1min
电气寿命 50000次/MIN
接触电阻 $\leq 100m\Omega$
行程 $0.25 \pm 0.1mm$
动作力 $250 \pm 50gf$

7	引脚、触点	磷铜	1	镀银
6	基座	LCP	1	耐温280℃（黑色）
5	簧片	不锈钢	1	覆银
4	防尘膜(内)	PI	1	耐温280℃（黄色）
3	防尘膜(外)	PI	1	耐温280℃（黄色）
2	盖板	不锈钢	1	/
1	按钮	PPA	1	耐温280℃（黑色）
序号	零件名称	材料规格	数量	备注

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ± 0.30 X. $^{\circ} \pm 2^{\circ}$.XX ± 0.20 .X. $^{\circ} \pm 1^{\circ}$.XXX ± 0.10 .XX. $^{\circ} \pm 0.5^{\circ}$	DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm		HYS-145A
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10		侧按轻触开关 四脚全贴带柱4*6大龟



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>