

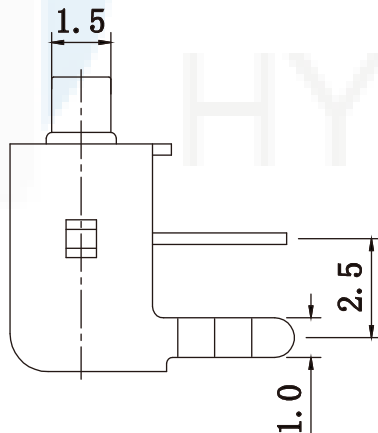
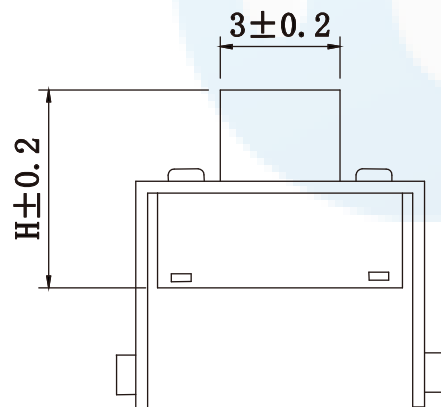
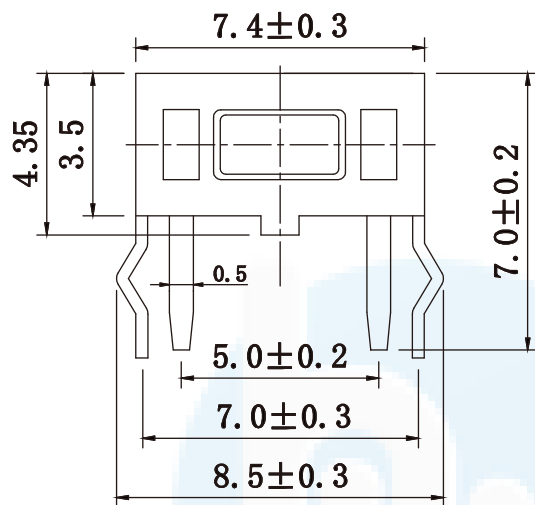


ROHS
Compatible

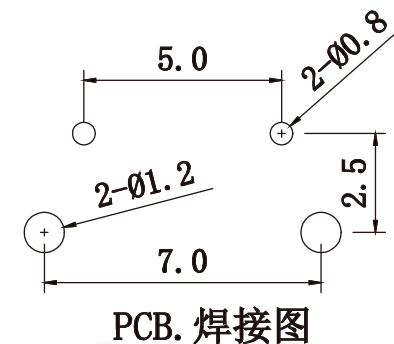

| H |
|-----|
| 4.3 |
| 4.5 |
| 4.8 |
| 5.0 |
| 5.5 |
| 6.0 |
| 7.0 |
| 8.0 |



主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: $\leq 50m\Omega$
3. 操作力: $250 \pm 40gf$
4. 行程: $0.20 \pm 0.1mm$
5. 绝缘电阻: $\geq 100M\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 30,000

| 5 | 引脚、触点 | 黄铜 | 1 | 镀银 |
|----|-------|------|----|---------|
| 4 | 基座 | PPA | 1 | 耐高温280℃ |
| 3 | 簧片 | 不锈钢 | 1 | 覆银 |
| 2 | 支架 | 冷轧钢 | 1 | 镀锡 |
| 1 | 按钮 | PPA | 1 | 耐高温280℃ |
| 序号 | 零件名称 | 材料规格 | 数量 | 备注 |

| | | | | |
|----------|---------------|-------|---------------|--|
| DESIGN | Li Jinwei | SCALL | | TOLERANCE .XX ± 0.30 X. $^{\circ} \pm 2^{\circ}$.XX ± 0.20 .X. $^{\circ} \pm 1^{\circ}$.XXX ± 0.10 .XX $^{\circ} \pm 0.5^{\circ}$ |
| DRAWING | Wu Qifa | UNIT | mm | |
| CHECK | Zheng Jinxian | SIZE | A4: 210 * 297 | |
| APPROVAL | Liu Xiaohong | DATE | 2020-06-10 | |

| | |
|-----------|--------------|
| DRAWG NO. | HYS-160 |
| TITLE: | 轻触开关3*6*H带支架 |

东莞市宏煜盛实业有限公司
 Dongguan hongyusheng Industry Co., Ltd
 TEL: 0769-81230179 <https://www.hystypec.com>