

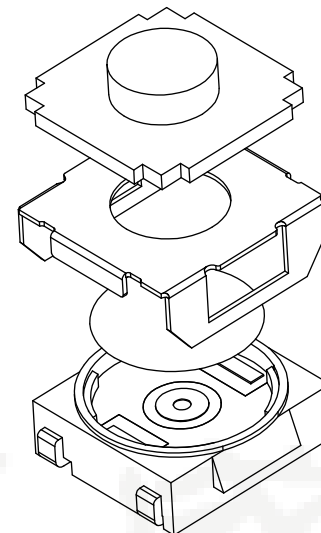






ROHS
Compatible

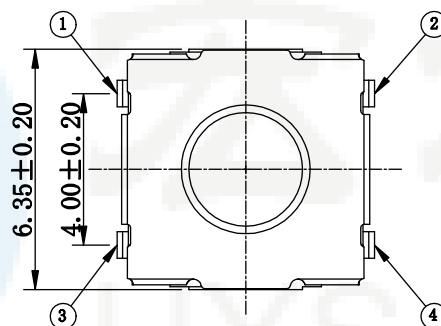

H	
3.1	3.5
4.3	4.5
5.0	5.2

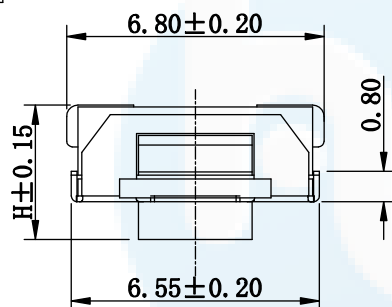

电路图

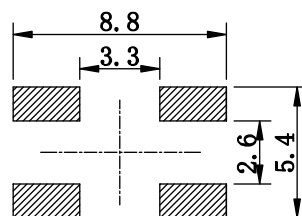

PCB. 焊接图

主要技术规格:

1. 额 定 值: 50mA DC12V
2. 接触电阻: $\leq 50\text{m}\Omega$
3. 操 作 力: $180\text{g} \pm 50$ & $250 \pm 50\text{gf}$
4. 行 程: $0.4 \pm 0.2\text{mm}$
5. 绝缘电阻: $\geq 100\text{M}\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿 命: 100,000 Cycles

5	引脚、触点	黄铜	1	镀银
4	基座	PPA	1	耐温280℃
3	簧片	不锈钢	1	覆银
2	盖板	不锈钢	1	/
1	按钮	硅胶	1	耐温280℃
序号	零件名称	材料规格	数量	备注

DESIGN	Li Jinwei	SCALL			DRAWG NO. HYS-1132
DRAWING	Wu Qifa	UNIT	mm		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		
APPROVAL	Liu Xiaohong	DATE	2020-06-10		
				TOLERANCE	TITLE:
				X.X ±0.30 X.°±2°	轻触开关U型脚硅胶按键 6.2*6.2*H
				.XX ±0.20 .X°±1°	
				.XXX ±0.10 .XX°±0.5°	



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>