
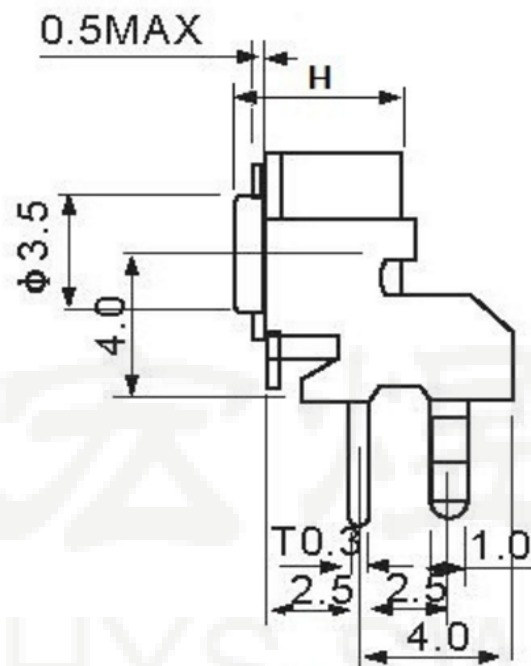



ROHS
Compatible

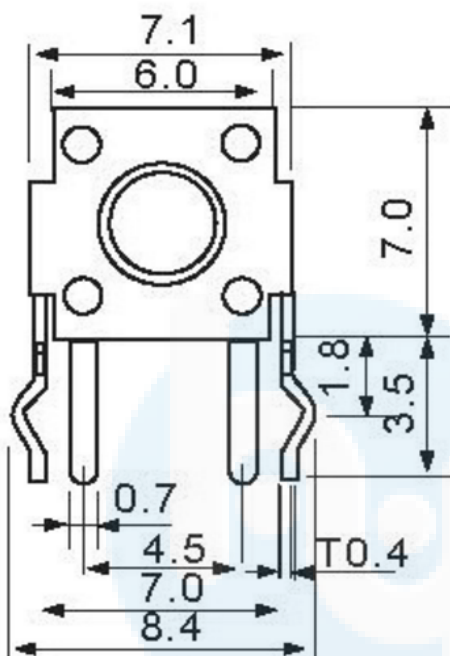


H(mm)	Ø(mm)	L(mm)
4.3	3.4	3.15
4.5	3.4	3.35
5.0	3.4	3.85
5.5	3.3	4.35
6.0	3.3	4.85
6.5	3.3	5.35
7.0	3.3	5.85
7.5	3.3	6.35
8.0	3.3	6.85
8.5	3.3	7.35
9.0	3.3	7.85
9.5	3.3	8.35
10.0	3.0	8.85
10.5	3.0	9.35
11.0	3.0	9.85
11.5	3.0	10.35
12.0	3.0	10.85
12.5	3.0	11.35
13.0	3.0	11.85

SPECIFICATIONS

- 1、Rating : DC 12V, 50mA ;
- 2、Contact Resistance : 100mΩMax ;
- 3、Insulation Resistance : 100MΩ Min
- 4、Operating Force : 130±30gf ;
- 5、Travel : 0.25± 0.1mm ;
- 6、Operating Life : 100,000 cycles Min

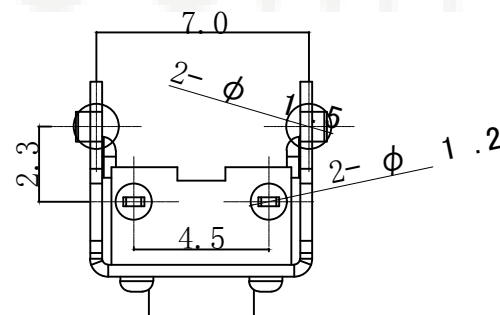

P. C. B LAYOUT
TOP VIEW



CIRCUIT

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	HYS-1113
TITLE:	轻触开关半包支架6*6*H



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>