


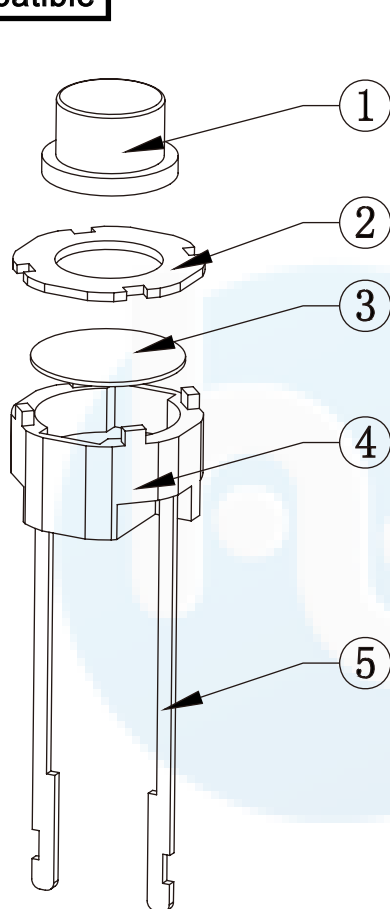
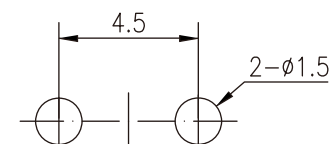
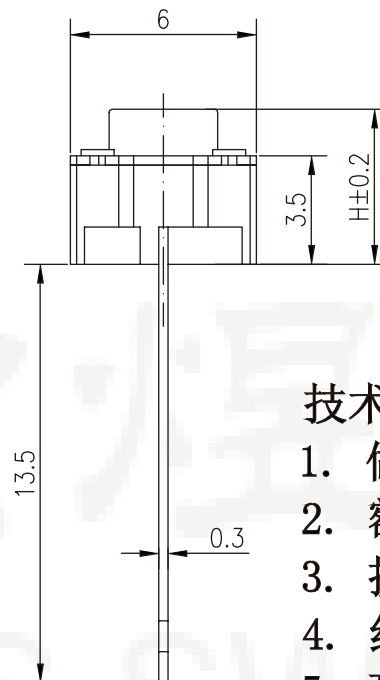


ROHS
Compatible

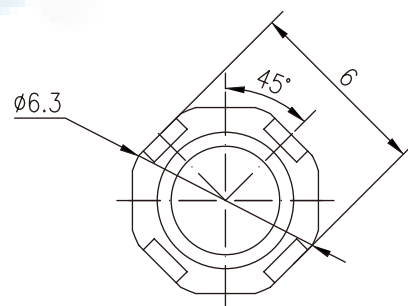

电路图

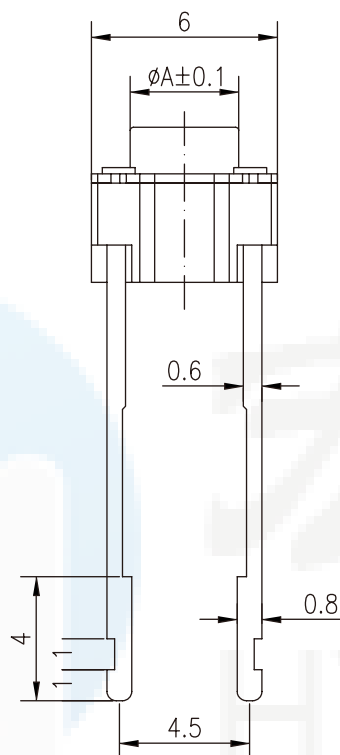

PCB线路板安装图(±0.2)

技术参数:

1. 做用温度: $-25 \sim +85^{\circ}\text{C}$;
2. 额定负荷: DC 12V 50mA;
3. 接触电阻: $\leq 50\text{m}\Omega$;
4. 绝缘电阻: $\geq 100\text{M}\Omega$;
5. 耐 压: AC250V (50Hz)/min;
6. 动 作 力: $160\text{g} \pm 50\text{g}$;
7. 使用寿命: 80000次;
8. 未注尺寸公差参照下面表格。

A	H(高度)
$\phi 3.4$	4.3
$\phi 3.4$	5.0
$\phi 3.2$	6.0
$\phi 3.2$	9.0
$\phi 3.2$	9.5
$\phi 3.2$	11.5
$\phi 3.0$	15

5	接触脚	黄铜	镀银	1	
4	基座	PPA (黑色)	——	1	
3	簧片	复合银	——	1	
2	盖板	冷轧钢带	铜锡	1	
1	按钮	PPA (白色)	——	1	
序号	零件名称	材料规格	表面处理	数量	备注

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ± 0.30 X. $^{\circ} \pm 2^{\circ}$.XX ± 0.20 .X. $^{\circ} \pm 1^{\circ}$.XXX ± 0.10 .XX. $^{\circ} \pm 0.5^{\circ}$
DRAWING	Wu Qifa	UNIT	mm	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	
APPROVAL	Liu Xiaohong	DATE	2020-06-10	

DRAWG NO.

HYS-1106

TITLE:

轻触开关



东莞市宏煜盛实业有限公司

Dongguan hongyusheng Industry Co., Ltd

TEL: 0769-81230179 <https://www.hystypec.com>