

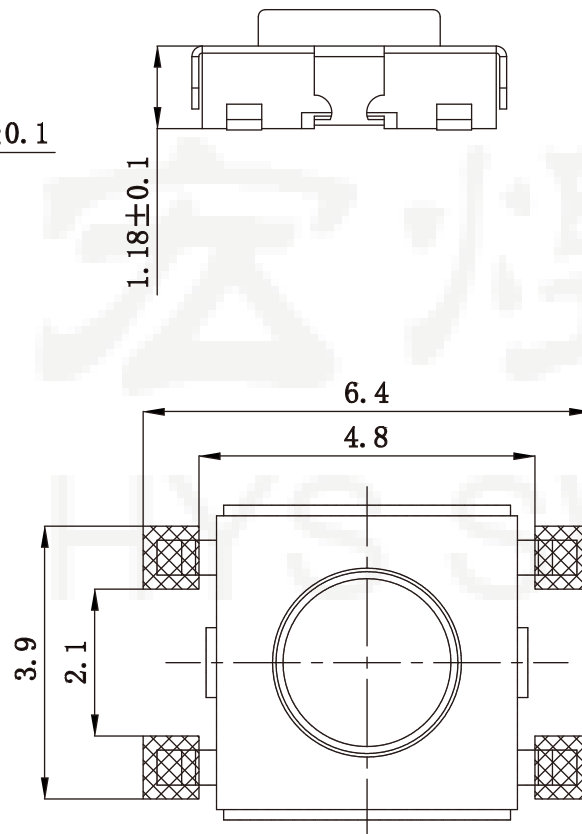
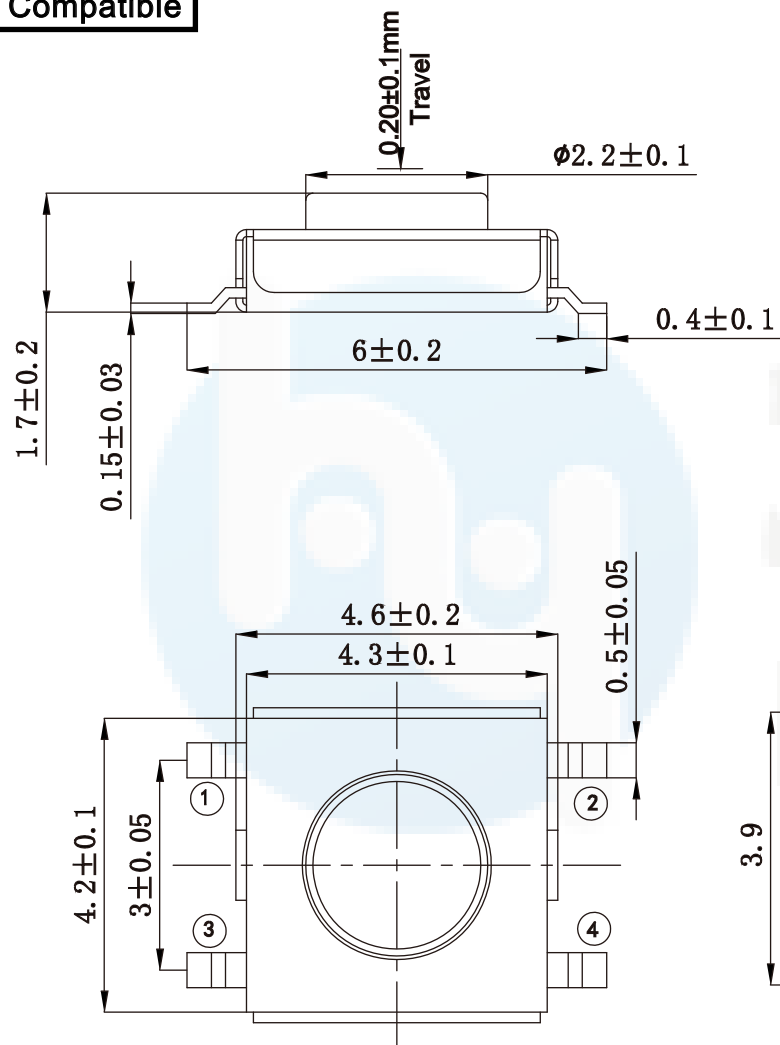


ROHS
Compatible

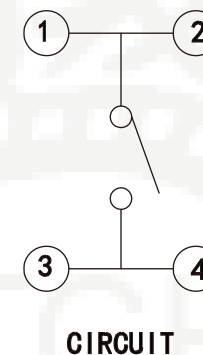

P.C.B LAYOUT
TOP VIEW

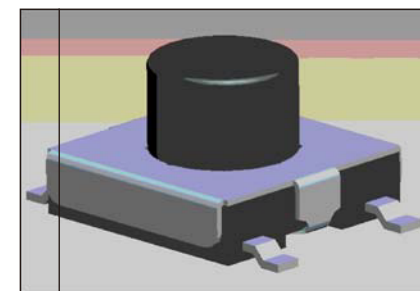

SPECIFICATIONS:

1. Rating: DC12V, 50mA;
2. Contact Resistance: $100\text{m}\Omega$ Max;
3. Operating Force: $100 \pm 30\text{gf}$
4. Travel: $0.20 \pm 0.1\text{mm}$
5. Insulation Resistance: $100\text{M}\Omega$ Max;
6. Withstand Voltage: 250V 1Min
7. Operating Life: 100,000cycles Min

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ± 0.30 X. $^\circ \pm 2^\circ$.XX ± 0.20 .X. $^\circ \pm 1^\circ$.XXX ± 0.10 .XX. $^\circ \pm 0.5^\circ$	DRAWG NO.	 东莞市宏煜盛实业有限公司 Dongguan hongyusheng Industry Co., Ltd TEL: 0769-81230179 https://www.hystypec.com
DRAWING	Wu Qifa	UNIT	mm		HYS-176	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:	
APPROVAL	Liu Xiaohong	DATE	2020-06-10		轻触开关	