

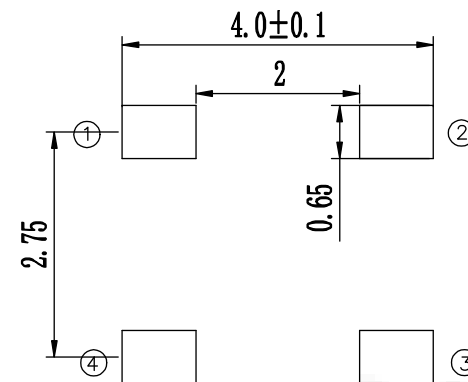
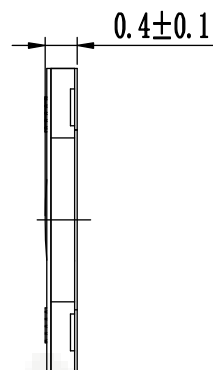
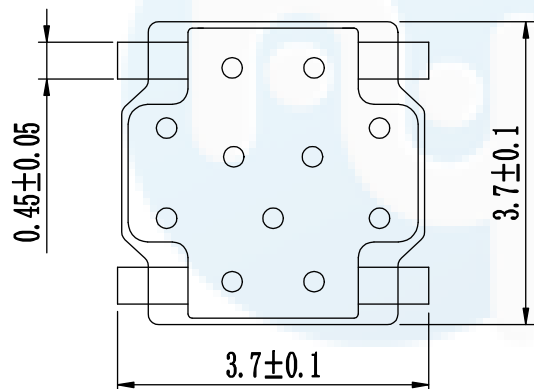


ROHS
Compatible

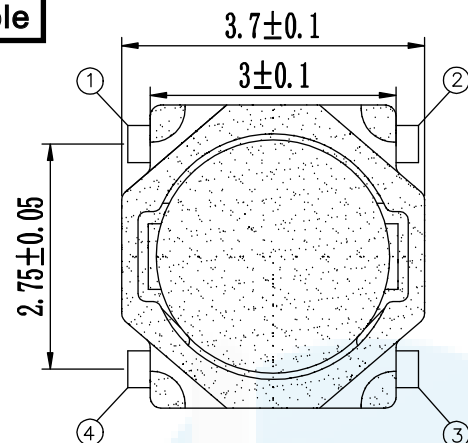

P . C . B LAYOUT



CIRCUIT DIAGRAM

Operating force	Model selection
100gf±40gf	
140gf±40gf	
160gf±40gf	
260gf±50gf	
350gf±50gf	

NO.	NAME	MATERIAL	QTY	REMARK
1	TERMINAL	C5191	1	Ag plating(0.2 μm min)
2	CASE	LCP	1	grey
3	CONTACT	SUS301	1	Ag plating(0.3 μm min)
4	DUSTPROOF FILM	PI	1	Yellow

SPECIFICATIONS

Operating temperature ranges	-30° to +85°
Rating	DC 12V 50mA Max.
Contact Resistance	100mΩ Max
Dielectric strength	250V AC for 1min.
insulation resistance	100mΩ Min. 100V DC
Travel	0.15±0.05mm
Operating Life(cycles)	50 000 CYCLES

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.

HYS-112

TITLE:

薄膜轻触开关 3.7*3.7*0.4H



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>