


ROHS
Compatible

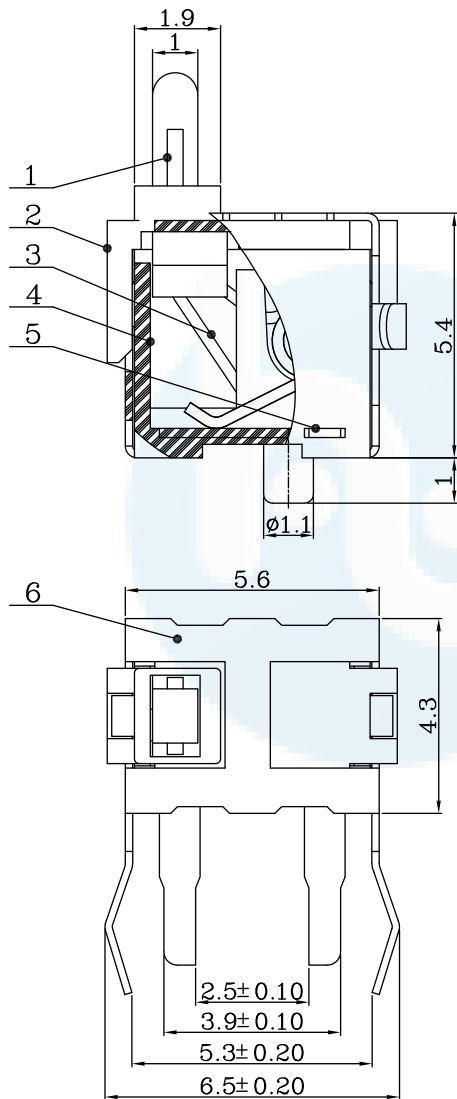

项目	规格
额定范围:	50mA DC12V
绝缘电阻:	100m Ω min(DC100V)
耐压强度:	AC100V(50/60Hz foy 1 minute)
机械寿命:	100.000 cycles
操作温度:	-10°C ~ +60°C
操作力度:	80 $\pm$ 20gf
	100 $\pm$ 20gf

6	外壳	1	铁皮	(镀铜锡)
5	弹簧	1	磷铜丝	(镀银)
4	接触脚	2	黄铜	(镀银)
3	基座	1	PA66	(黑色)
2	盖子	1	POM	(黑色)
1	推杆	1	POM	(黑色)
序号	名称	数量	材料	备注

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

ϕ	$\frac{\square}{\square}$
TOLERANCE	
X.X	± 0.30 X. $^{\circ} \pm 2^{\circ}$
.XX	± 0.20 .X. $^{\circ} \pm 1^{\circ}$
.XXX	± 0.10 .XX. $^{\circ} \pm 0.5^{\circ}$

DRAWG NO.	HYS-302
TITLE:	检测开关



东莞市宏煜盛实业有限公司

Dongguan hongyusheng Industry Co., Ltd

TEL: 0769-81230179 <https://www.hystypec.com>