
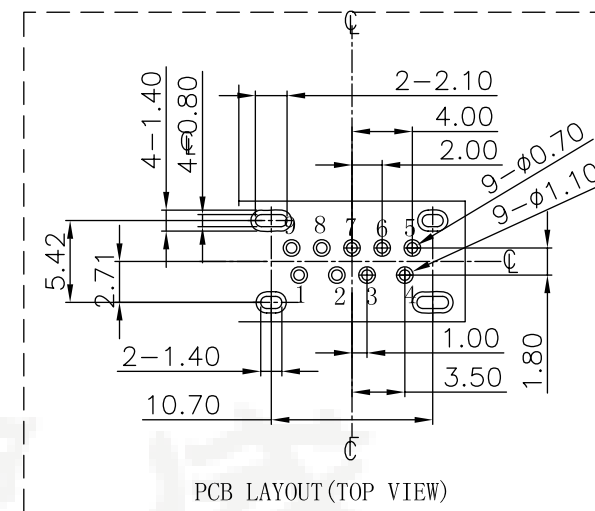


ROHS
Compatible

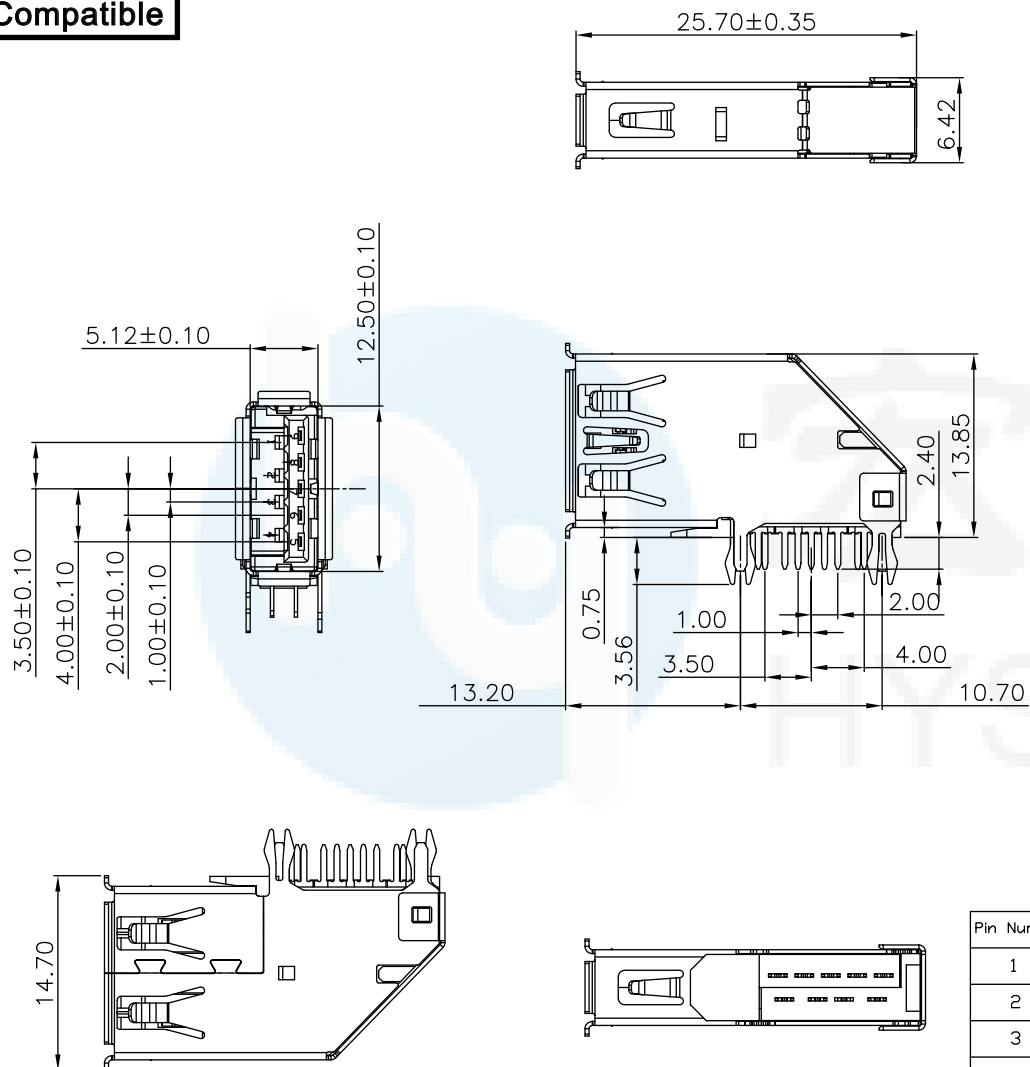

SPECIFICATIONS:

Contact current Rating:

1.8 Amperes for pin1&pin4.

0.25 Amperes other contacts

Dielectric Withstanding Voltage:AC 100V(RMS)

Insulation resistance:100Megohms Minimum.

Contact Resistance:

30mΩ Max for pin1&pin4

50mΩMax for other contacts

Mechanical Characteristics:

Mating Force:35 Newtons.Maximum

Unmating Force:10 Newtons.Minimum.

8N Min After Durability

MATERIAL:

Housing: PBT

Contact: copper alloy(T=0.25mm)

Shell: SUS

PLATING:

Contact: Gold Flash Plated on contact area

Tin Plated on solder area

Nickel underplating over all

Shell: Nickel Plated

operating Temperature:-55°to+85°

Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSRX-
2	D-	6	SSRX+
3	D+	7	GND
4	GND	8	SSTX-
Shell	Shield	9	SSTX+

DESIGN	Li Jinwei	SC ALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.

USB-30AF-YDV06Q

TITLE:

USB3.0AF侧插90度DIP卷边



东莞市宏煜盛实业有限公司

Dongguan hongyusheng Industry Co., Ltd

TEL: 0769-81230179 <https://www.hystypec.com>