

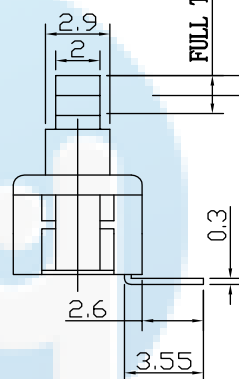






ROHS
Compatible



FULL TRAVEL 1.9
SWITCH TRAVEL 0.7






ELECTRICAL CHARACTERISTICS

1. RATING: DC 30V 0.1A
2. CONTACT RESISTANCE: 100mΩ MAX
3. INSULATION RESISTANCE: 100MΩ MIN
4. DIELECTRIC STRENGTH: AC 250V(50~60Hz)/60S

MECHANICAL CHARACTERISTICS

1. PRACTICAL TEMPERATURE RANG: -40℃~+85℃
2. OPERATING FORCE: 180±50gf
3. MECHANICAL LIFE: 20,000 cycles



P. C. B LAYOUT

NO.	PART NAME	MATERIAL	QTY.	FINISHING
7				
6	TERMINAL	BRASS STRIP	3	Ag PLATED
5	CASE	PPA	1	GRAY
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	PBS	2	Ag PLATED
2	NOB	PPA	1	WHITE
1	COVER	PPA	1	BLACK

DESIGN	Li Jinwei	SCALL			DRAWG NO. PS-5848D-L1	TITLE: 按键开关
DRAWING	Wu Qifa	UNIT	mm			
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297			
APPROVAL	Liu Xiaohong	DATE	2020-06-10			



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>