

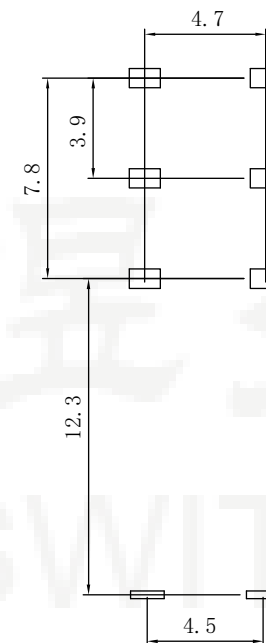
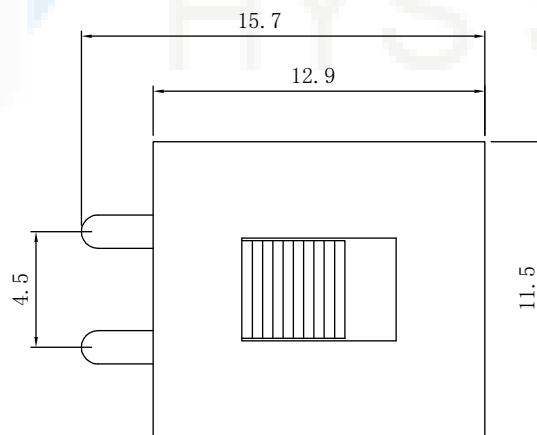
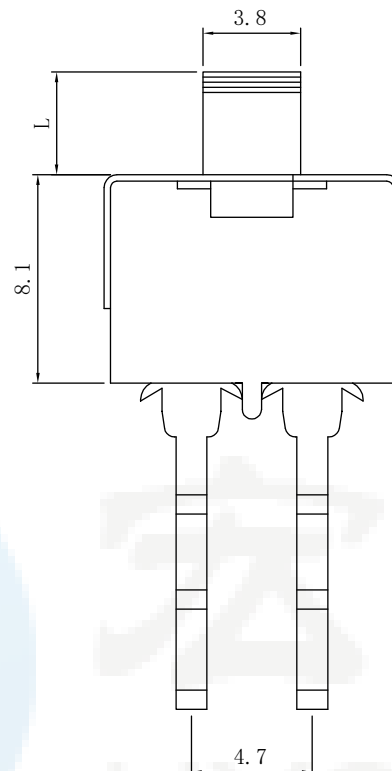


ROHS
Compatible

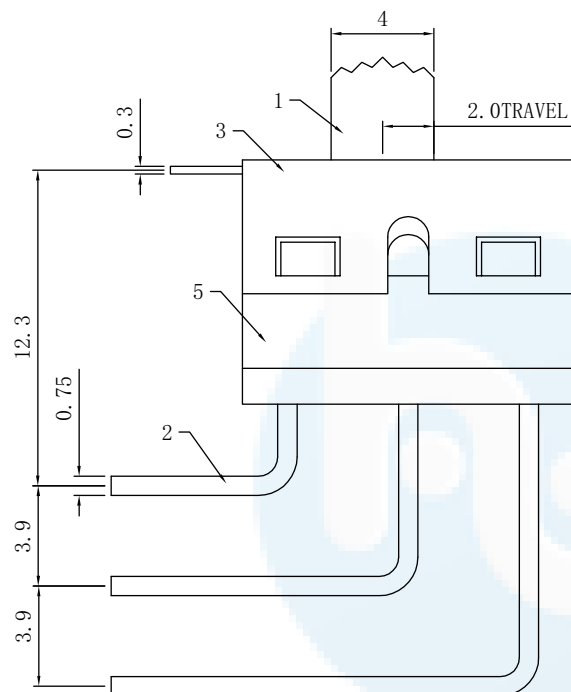

- 电气性能参数:
1. 额定负载: AC125V 2A
 2. 接触电阻: 100毫欧以下
 3. 绝缘电阻: 100兆欧以上
 4. 耐压: AC 500V
 5. 力度: 300 ± 100 gf
 6. 寿命: 3000次
 7. 波峰焊: 255 ± 5 度

7	钢珠	碳钢	2	原色
6	弹簧	碳钢线	2	原色
5	胶身	PPS	1	红色
4	码片	黄铜带	2	镀银
3	铁壳	不锈钢	1	原色
2	端子脚	黄铜带	6	镀银
1	胶柄	PPS	1	黑色
NO.	物料组成	材质	数量	表面处理

DESIGN	Li Jinwei	SC ALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

ϕ	$\pm$
TOLERANCE	
X.X ± 0.30	X. $^{\circ} \pm 2^{\circ}$
.XX ± 0.20	.X. $^{\circ} \pm 1^{\circ}$
.XXX ± 0.10	.XX. $^{\circ} \pm 0.5^{\circ}$

DRAWG NO.	HYS-259
TITLE:	拨动开关

	东莞市宏煜盛实业有限公司 Dongguan hongyusheng Industry Co., Ltd TEL: 0769-81230179 https://www.hystypec.com
---	--