

ROHS

Compatible

Rating

5 A 125/250VAC

Mechanical Life

1,000,000 cycles

Contact Resistance

100m Ω

Electrical Life

10,000 cycles

Insulation Resistance

>100M Ω DC500V

Ambient Temper. Used

-40℃ to +125℃

Withstand Voltage

AC1500V 1min.

Ambient Humidity Used






≤85% at +40℃

Soldering Temper.

235±5℃ 5s

Operating Force

70gf MAX

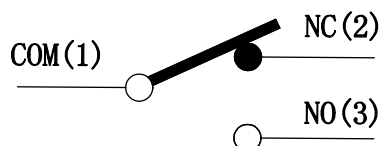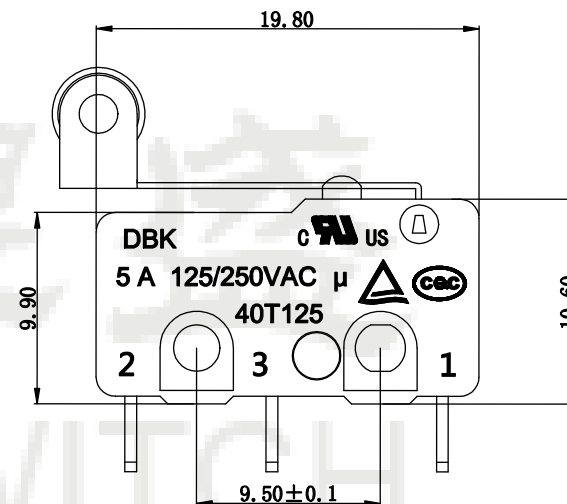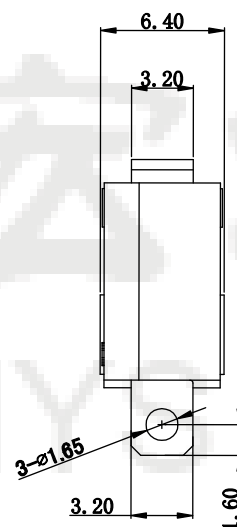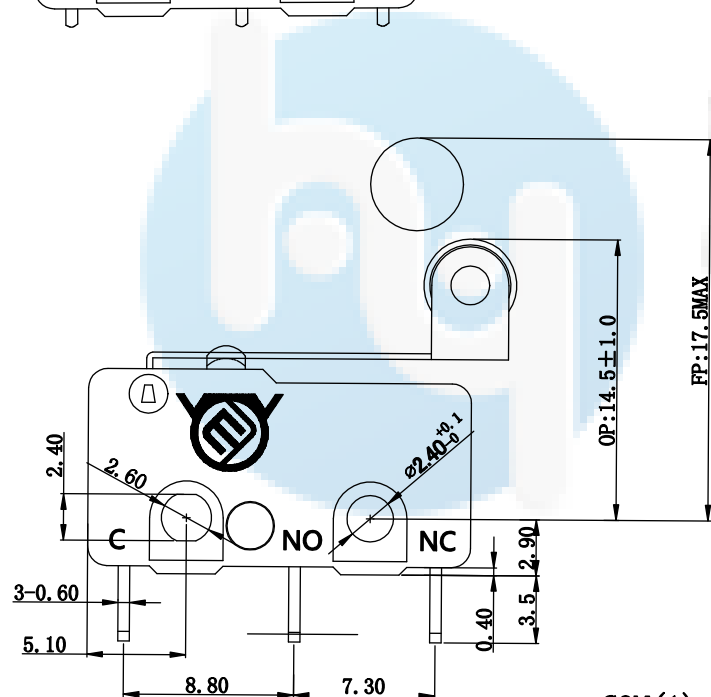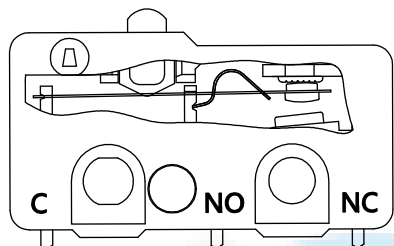

电路图

11	压柄 (Lever)	1	SUS	
10	铆钉 (Rivet)	1	AL	
9	触点 (CONTACT)	3	Silver Alloy	
8	C弹片 (SPRING)	1	C17200	
7	弹片 (SPRING)	1	C5210	
6	NO端子 (NO TERMINAL)	1	C2680	
5	NC端子 (NC TERMINAL)	1	C2680	
4	COM端子 (COM TERMINAL)	1	C2680	
3	按钮 (BUTTON)	1	PBT	UL94V-0
2	下盖 (BASE)	1	PBT	UL94V-0
1	上盖 (COVER)	1	PBT	UL94V-0
序号 NO.	零件名称 Part Name	数量 Quantity	材质 Material	备注 Notes

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

ϕ	$\frac{H}{D}$
TOLERANCE	
X.X ± 0.30	X.° $\pm 2^\circ$
.XX ± 0.20	.X° $\pm 1^\circ$
.XXX ± 0.10	.XX° $\pm 0.5^\circ$

DRAWG NO.

MS-1910DF

TITLE:

DB系列微动开关



东莞市宏煜盛实业有限公司

Dongguan hongyusheng Industry Co., Ltd

TEL: 0769-81230179 <https://www.hystypec.com>