

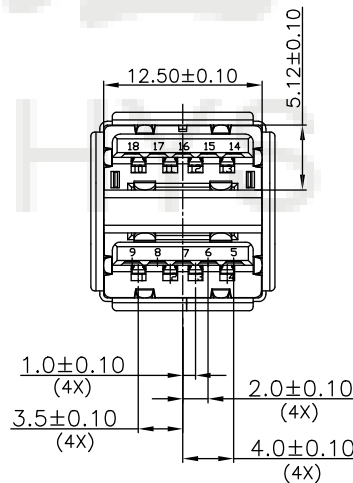
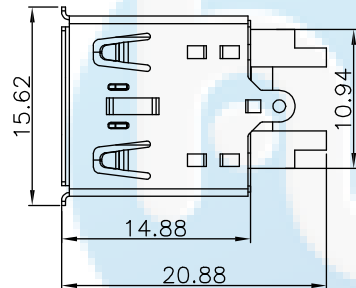




**ROHS**  
Compatible



**SPECIFICATIONS:**

Contact current Rating:  
1.8 Amperes for pin1&pin4.  
0.25 Amperes other contacts

Dielectric Withstanding Voltage:AC 100V(RMS)  
Insulation resistance:100Megohms Minimum.

Contact Resistance:  
30mΩ Max for pin1&pin4  
50mΩ Max for other contacts

Mechanical Characteristics:  
Mating Force:35 Newtons.Maximum  
Unmating Force:10 Newtons.Minimum.

MATERIAL: 8N Min After Durability  
Housing: PBT+30%GF 94V-0 COLOR:BLUE  
Contact: copper alloy( T=0.25mm)  
Shell: Brass

PLATING:  
Contact: Au Plated on contact area  
Tin Plated on solder area  
Nickel underplating over all  
Shell: Nickel Plated  
operating Temperature:-55iãto+85iã

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

⌀	
TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X° ±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	USB-30AF-OJ16Q
TITLE:	USB3.0AF双层焊线式


**东莞市宏煜盛实业有限公司**  
 Dongguan hongyusheng Industry Co., Ltd  
 TEL: 0769-81230179 <https://www.hystypec.com>