

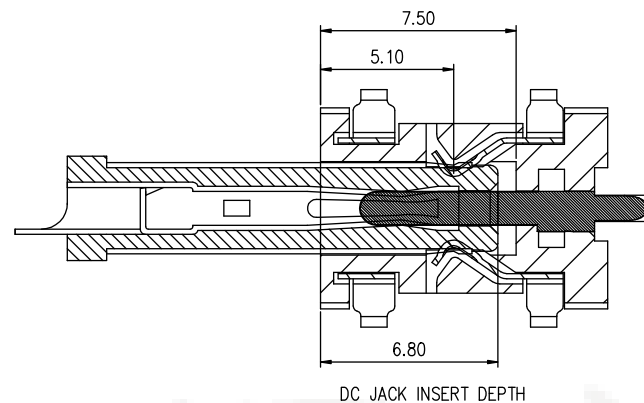
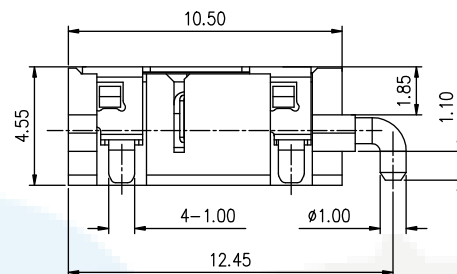




ROHS
Compatible




3D VIEW

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: 24V 3A
 - 1-2. CONTACT RESISTANCE: 50mΩ MAX. (INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4. INSULATION RESISTANCE: 100M Ω MIN. MEASURED BY 500V DC
- MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 0.3~3.0 KGF
 - 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF
- LIFE TEST: 5,000 CYCLES MIN.

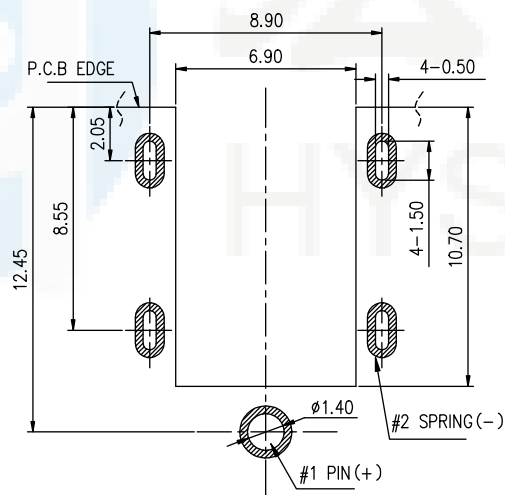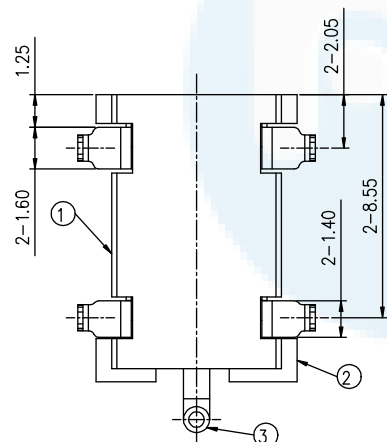

RECOMMENDED PCB LAYOUT
TOP VIEW (TOLERANCE: ±0.05)

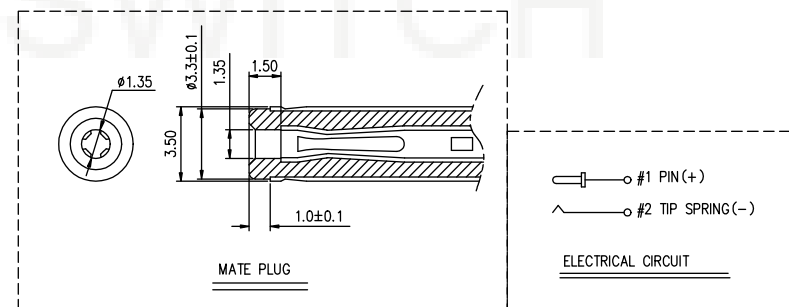

料号说明:

序号	产品料号	DIM
1	DC-012-01	0.80
2	DC-012-02	1.30
3	DC-012-03	1.50

③	CENTER PIN	1	COPPER ALLOY $\phi 1.3$	Au
②	TERMINAL	1	COPPER ALLOY 0.2t	Au
①	HOUSING	1	HIGHT TEMPERATURE PLASTIC	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

DESIGN	Li Jinwei	SC ALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ± 0.30	X. $^{\circ} \pm 2^{\circ}$
.XX ± 0.20	.X. $^{\circ} \pm 1^{\circ}$
.XXX ± 0.10	.XX. $^{\circ} \pm 0.5^{\circ}$

DRAWG NO.

DC-012

TITLE:

DC插座(大电流)



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>