
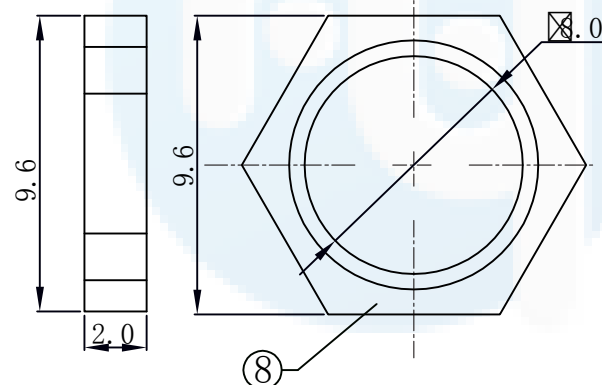
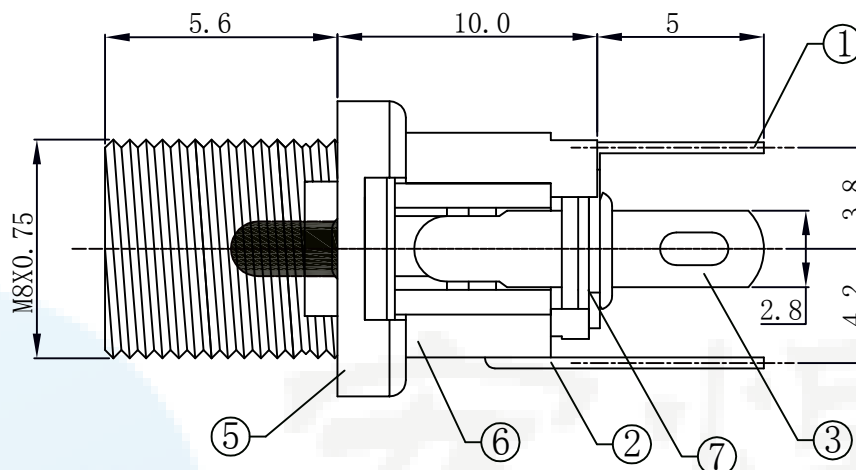



ROHS
Compatible

技术要求



- 1、插入力: 3~30N(0.3~30kgf)
- 2、拔出力: 3~30N(0.3~30kgf)
- 3、接触电阻: $\leq 50\text{m}\Omega$
- 4、绝缘电阻: $>100\text{M}\Omega$ DC 500V
- 5、耐电压: AC 500V 1min无飞弧及击穿
- 6、寿命: 5000 10~20次/min
- 7、额定负载: DC 12V 6A
- 8、适用温度范围: $-25\sim 85^{\circ}\text{C}$
- 9、推荐使用插头:

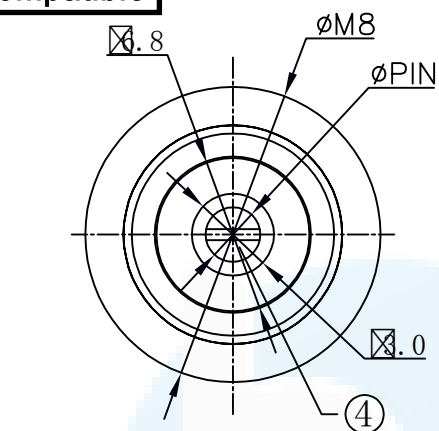

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-sided view)

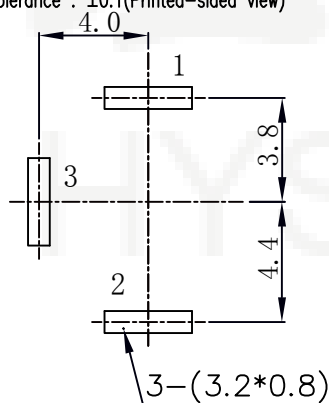

CIRCUIT DIAGRAM

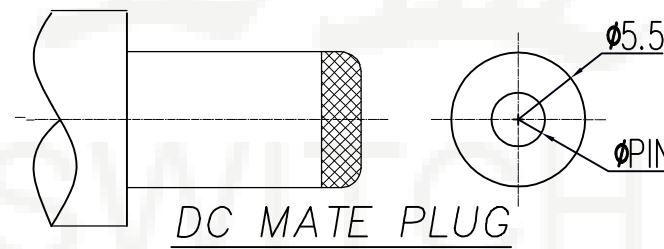

DC MATE PLUG

PIN	$\phi 2.0$	$\phi 2.5$
APPD		

7	JQ-DC-0025M-07	螺帽	2PCS	H59-3黄铜	镀锡	环保
7	JQ-DC-0025M-07	盖子	2PCS	绝缘板	黄色	环保
6	JQ-DC-0025M-06	塑料座	1PCS	PBT (BLACK)	黑色	环保
5	JQ-DC-225BM-05	铜套	1PCS	H59-3黄铜棒=8.1	镀锡	环保
4	JQ-DC-0025M-04	PIN	1PCS	65黄铜棒=8.0	镀锡	环保
3	JQ-DC-0025M-03	3号脚	1PCS	C5191磷铜=0.5	镀锡	环保
2	JQ-DC-0025M-02	2号脚	1PCS	C5210黄铜=0.4	镀锡	环保
1	JQ-DC-0025M-01	1号脚	1PCS	C5210黄铜=0.4	镀锡	环保
序号	零件图代号	名称	数量	材料	镀层/颜色	备注

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

ϕ	± 0.30	$X^{\circ} \pm 2^{\circ}$
.XX	± 0.20	$X^{\circ} \pm 1^{\circ}$
.XXX	± 0.10	$.XX^{\circ} \pm 0.5^{\circ}$

DRAWG NO.

DC-025BM

TITLE:

DC插座



东莞市宏煜盛实业有限公司

Dongguan hongyusheng Industry Co., Ltd

TEL: 0769-81230179 <https://www.hystypec.com>