


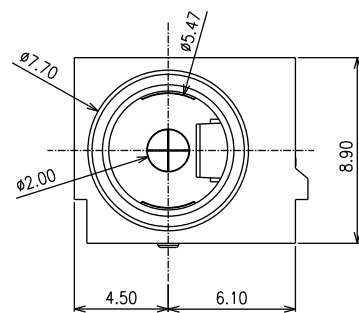
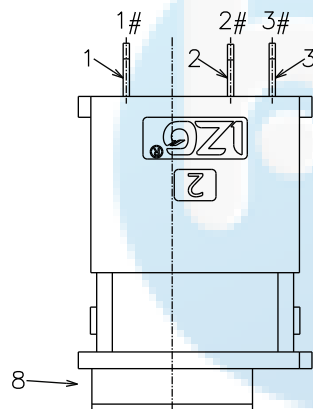


ROHS

Compatible

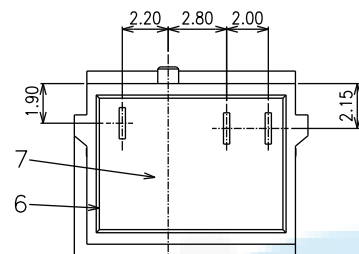


WHITE WATERPROOF RING


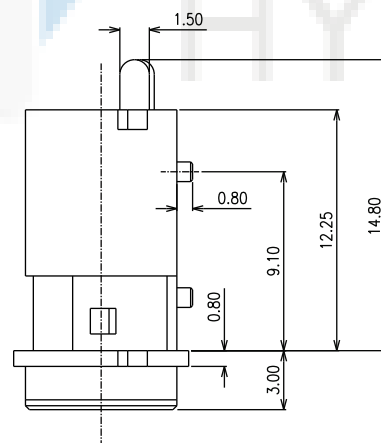


NOTES

1. CURRENT RATING: 24V & 5A MAX.
2. CONTACT RESISTANCE: 50mΩ MAX.
3. INSULATION RESISTANCE: 100MΩ MIN.
4. DIELECTRIC WITHSTANDING: 500V AC MIN.
5. DURABILITY: 5000 CYCLES MIN.
6. CONNECTOR MATING FORCES: 3~35N.
7. CONNECTOR UNMATING FORCES: 3~35N.
8. OPERATING TEMPERATURE: -25°C TO +85°C.

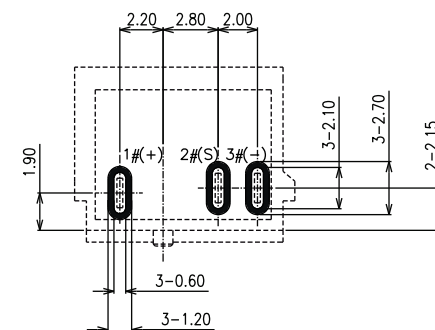

RECOMMEND PCB LAYOUT
TOLERANCE:±0.05

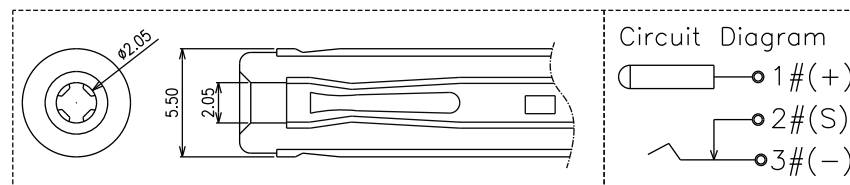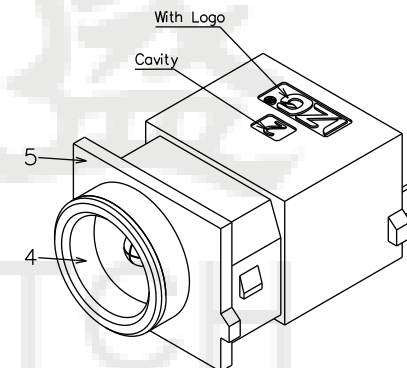

Not to install the waterproof ring shipment

8	WATERPROOF RING	1	SILICONE; WHITE	
7	GLUE	1	EPOXY; BLACK	
6	BACK COVER	1	HIGH TEMPERATURE; BLACK	
5	HOUSING	1	HIGH TEMPERATURE; BLACK	
4	INNER BUSING	1	COPPER ALLOY; NICKEL PLATING	
3	TERMINAL 3#	1	COPPER ALLOY; NICKEL UNDERPLATING OVERALL, Au PLATING ON SOLDER AREA	
2	TERMINAL 2#	1	COPPER ALLOY; NICKEL UNDERPLATING OVERALL, Au PLATING ON THE WHOLE	
1	TERMINAL 1#	1	COPPER ALLOY; NICKEL UNDERPLATING OVERALL, Au PLATING ON SOLDER AREA	
ITEM	NAME	Q'TY	DESCRIPTION	

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.	 东莞市宏煜盛实业有限公司 Dongguan hongyusheng Industry Co., Ltd TEL: 0769-81230179 https://www.hystypec.com
DRAWING	Wu Qifai	UNIT	mm		HYS30008-03DBAP-B	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:	
APPROVAL	Liu Xiaohong	DATE	2020-06-10		Φ2.0mm 防水DC 插座	